



Our laboratory

Our laboratory already has equipment to test EU ERP level, the testing instruments are: air flow testing instrument/grease separation degree testing instrument/noise testing room/illuminance testing room/power testing instrument. We are doing very strict quality control for all incoming material, especially for the electric parts, and life time testing is always carrying on for all parts and finished products. For some important parts, we are now doing 100% quality checking, such as glass/polishing of SS/powder coating parts.

For the packaging material, we also do regular testing for bursting strength and side compression strength. Before loading the mass production products, we would also test the full function of the product according to AQL level by randomly get the sample from mass production.

For some strict requirements of the products, we can also do drop test, transportation vibration test, piling level test, to make sure all materials are acceptable to customer.



Simulative kitchen



Illuminance test



Grease separation degree test



Noise test



Air flow test



Finished product inspection



Transit test



Flammability test



Drop test



Aging test



Endurance test



Finished product inspection



Switch endurance test




Pressure test

Suction schematic

The general key part-housing. It exhausts out the air in the range hood body, form a low pressure area inside to lead the movement of the air, this exhausts the smoke and stale air out of the room. The power the housing is, the faster the smoke and stale air exhausted out due to the higher efficiency.

For our products, the Max airflow is 1000m3/h, this means in the kitchen which is 20m2, to operate the range hood in Max power level, it would take us around 2 minutes to exhaust all the smoke in the kitchen out of the room, to keep your kitchen fresh and clean.

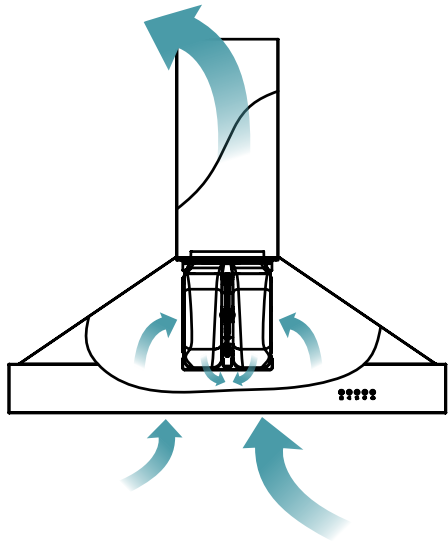


Each hood must contain the information on the sticker

Each Product must have the Energy Label according to (EU) NO 2010/30/EU, and Supplier must Ecodesign Energy-related Products according to Directive 2009/125/EC

From 1st January 2015 all range hood had this energy label showing the detailed information of ERP ratings from F to A+, customer can check the detailed information of the hood and choose the most suitable hood for your kitchen.

Choosing a product with an 'A' or 'A+' energy rating will not only help the environment, but will also cut the cost of your bills. We offer an extensive range of energy saving appliances that utilise advanced technological solutions to deliver outstanding efficiency - protecting our planet and saving you money. When looking for 'A' or 'A+' energy rated appliances, watch out for our green energy efficient icon.

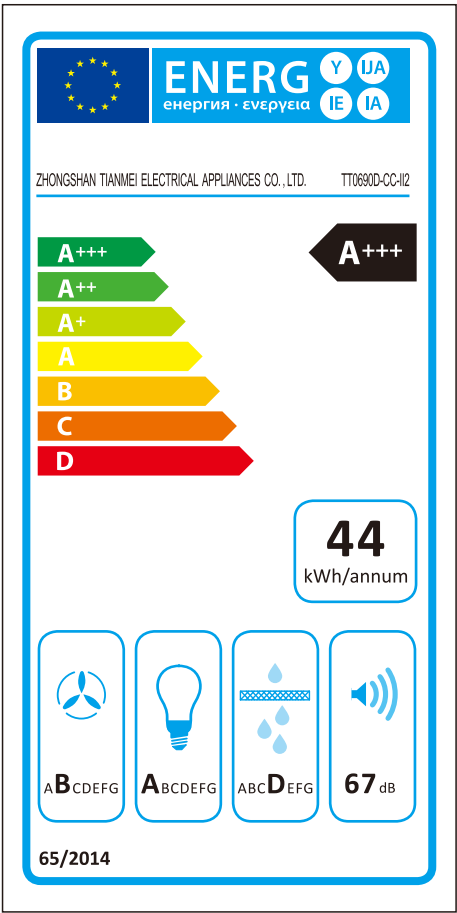


- Energy efficiency:**
A+++ indicates the class of consumption which belong each product. It's obtained by a calculation that takes into account different articulated parameters of the cooker hood.
- Annual Energy Consumption:**
44 kWh/annum
Expressed in kWh. Consider an estimated use of one hour per day for the motor and up to three hours for lighting. For example, 60kw/h per year are about 10/12 Euro of energy bill.
- Fluid dynamic efficiency class:**
Based on the fluid flow rate, pressure and the eletric power input. The most efficient date is above 28.
- Lighting efficiency class:**
Based on the average illumination and the electric power input.
- Grease filtering efficiency:**
Based on the amount of grease retained in the grease filters.
- Noise Level:**
67 dB
Based on the highest setting for normal use.



“H” Air passage


Housing H have 3 air inlets, this design can suck more air into the housing with faster speed, the dual impellers are drive by the motor revolving in 4 different directions in high speed, leads the compact air exhausting out very fast. The more air suck into the housing, the more efficiency the hosing can gains and more air exhausting out. We can also achieve bigger air pressure from this design, and big air pressure is very necessary for the hood using in high level apartment kitchen.

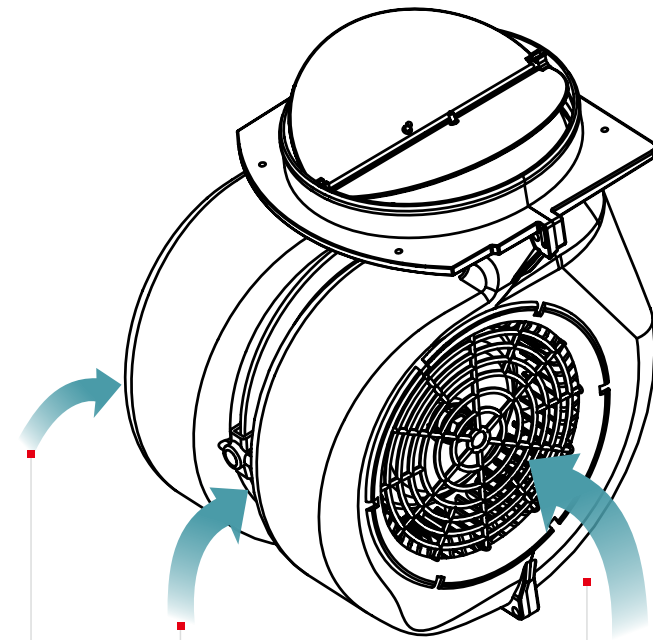

Air inleting in 3 different directions

Dual impellers four way air inleting

Dual impellers design
to gain more powerful air flow.
Have options of cast aluminum or
ABS plastic outer body.

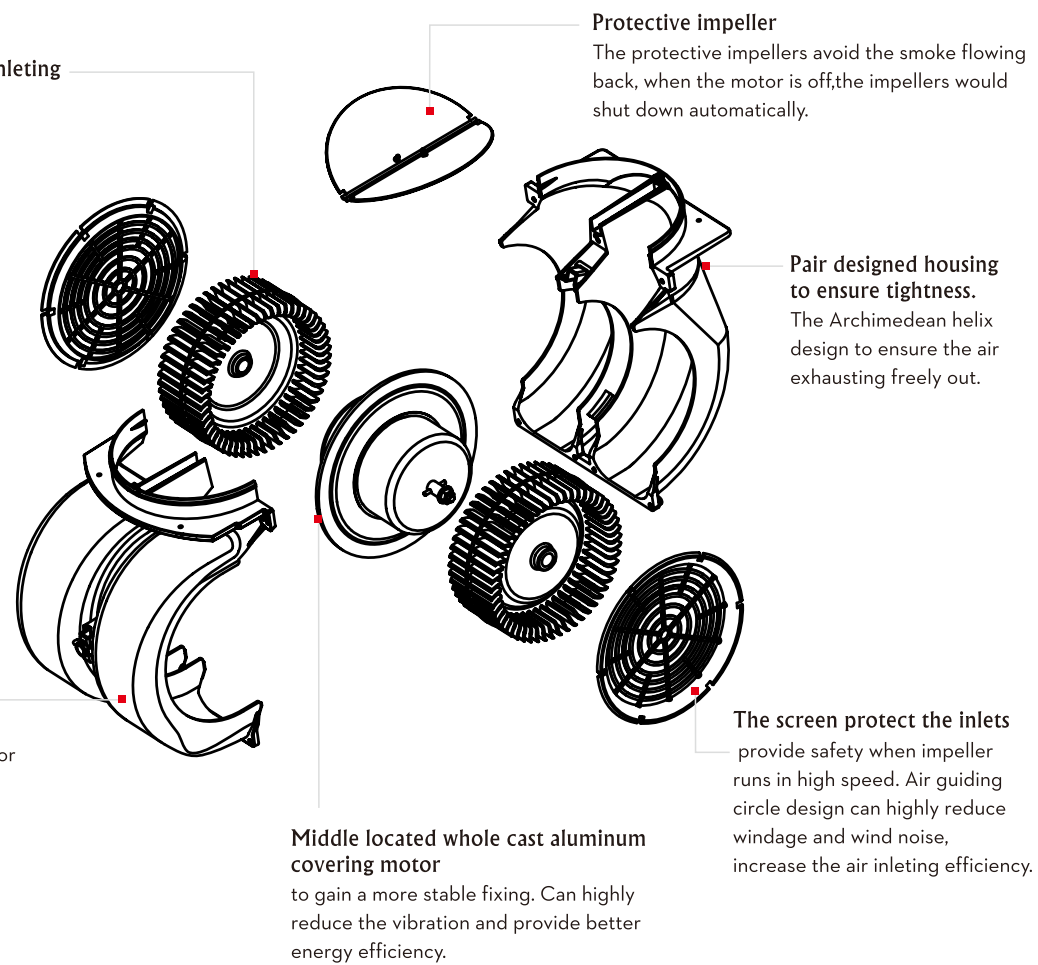

Air ventilation setting

Outdoor exhausting: Turn the adjuster to outdoor position , install the outlet, turn on the cooker hood, then the air will be vented from the outside outlet.

Recycling: the recycling mode with carbon filter. Turn the adjuster to indoor position ,install the outlet cover, turn on the cooker hood ,then the air can be vented from the inside outlet.

Note: the charcoal filter is mounted on the back of the grill and must be changed once in every three month.

Warning: The charcoal cannot be washed or recycled . it should be changed at most after 120 hours using.The carbon filter shouldn't be exposed to heat . You can purchase new charcoal filters directly from Webber Asia.

1/

Outdoor
Exhausting

2/


Recycling

3/

Note

4/

Warning

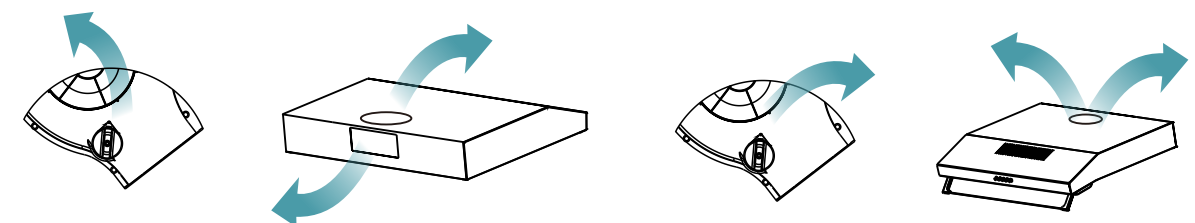



TF Series

TF SERIES IS SLIM HOOD, IT IS DESIGNED FOR SMALL KITCHEN AND LIGHT SMOKE COOKING STYLE. IT IS VERY EASY TO INSTALL THE SLIM HOOD, JUST FIX IT ONTO THE BOARD OF KITCHEN CABINET, CAN ALSO BE HANGED ON THE WALL.



TF SLIM RANGE HOOD SERIES

TF series is slim hood, it is designed for small kitchen and light smoke cooking style.
It is very easy to install the slim hood, just fix it onto the board of
kitchen cabinet, can also be hanged on the wall.



SLIM HOOD



TF20



► Features


Size	50/60/70/75/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A(1x80W motor)-200m ³ /h Housing B(2x80W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	3-Layer aluminium grease filter
Others	φ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x95x480	530x135x520	740/1740 pcs
60 cm	595x95x480	630x135x520	620/1480 pcs
70 cm	695x95x480	730x135x520	551/1260 pcs
80 cm	795x95x480	830x135x520	551/1120 pcs
90 cm	895x95x480	930x135x520	418/990 pcs

► Optional

Touch switch /Electronic switch
Baffle filter
Painting filter with silicon wool or aluminum grid
Aluminum or plastic exhaust pipe
Available powder coating: Black/White/Gray etc.
110V or 220V Available

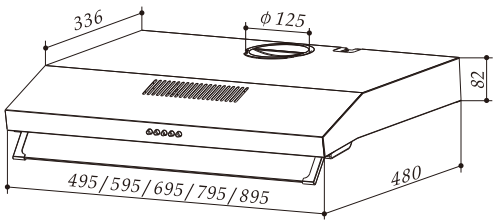

TF21



► Features


Size	50/60/70/75/76/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A(1x80W motor)-200m ³ /h Housing B(2x80W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	3-Layer aluminium grease filter
Others	φ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x135x480	530x170x520	600/1405 pcs
60 cm	595x135x480	630x170x520	504/1185 pcs
70 cm	695x135x480	730x170x520	452/1020 pcs
80 cm	795x135x480	830x170x520	392/910 pcs
90 cm	895x135x480	930x170x520	346/800 pcs

► Optional

With round charcoal filter
Touch switch /Electronic switch
Baffle filter
Painting filter with silicon wool or aluminum grid
Aluminum or plastic exhaust pipe
Available powder coating: Black/White/Gray etc.
110V or 220V Available

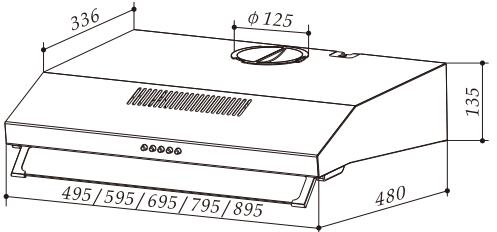

SLIM HOOD



TF22



► Features


Size	50/60/70/76/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A(1x80W motor)-200m ³ /h Housing B(2x80W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	3-Layer aluminium grease filter
Others	Φ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x135x495	530x170x535	552/1292 pcs
60 cm	595x135x495	630x170x535	490/1120 pcs
70 cm	695x135x495	730x170x535	412/936 pcs
80 cm	795x135x495	830x170x535	364/840 pcs
90 cm	895x135x495	930x170x535	340/765 pcs

► Optional

With round charcoal filter
Baffle filter
Painting filter with silicon wool or aluminum grid
Aluminum or plastic exhaust pipe
Available powder coating: Black/White/Gray etc.
110V or 220V Available

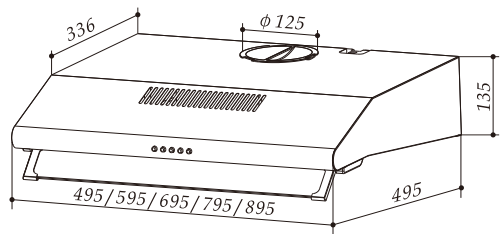

TF23



► Features


Size	50/60/70/75/80/90 cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A(1x80W motor)-200m ³ /h (100 CFM) Housing B(2x80W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	3-Layer aluminium grease filter
Others	Φ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x100x480	530x145x520	700/1615 pcs
60 cm 24 in	595x100x480	630x145x520	591/1450 pcs
70 cm	695x100x480	730x145x520	508/1185 pcs
80 cm	795x100x480	830x145x520	448/1050 pcs
90 cm 36 in	895x100x480	930x145x520	394/930 pcs

► Optional

With round charcoal filter
Touch switch /Electronic switch
Baffle filter
Painting filter with silicon wool or aluminum grid
Aluminum or plastic exhaust pipe
Available powder coating: Black/White/Gray etc.
110V or 220V Available

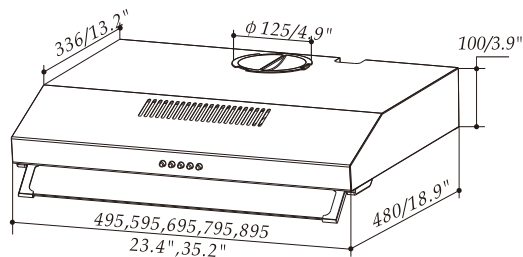

SLIM HOOD



TF24



► Features


Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Metal
Airflow	Housing B(2x130W motor)-1000m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	3x Baffle filters
Others	Φ 195mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	755x254x560	830x410x660	110/300 pcs
90 cm 36 in	895x254x560	970x410x660	90/220 pcs

► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available

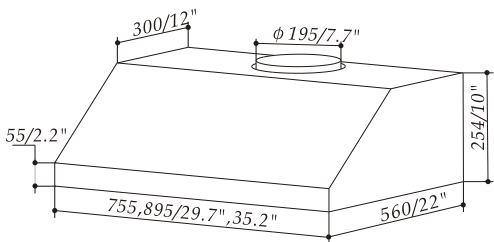

TF25



► Features


Size	50/60/70/75/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A(1x80W motor)-200m ³ /h (100 CFM) Housing B(2x80W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	3-Layer aluminium grease filter
Others	Φ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x100x495	530x140x535	688/1560 pcs
60 cm 24 in	595x100x495	630x140x535	588/1380 pcs
70 cm	695x100x495	730x140x535	496/1128 pcs
80 cm	795x100x495	830x140x535	448/1008 pcs
90 cm 36 in	895x100x495	930x140x535	392/948 pcs

► Optional

With round charcoal filter
Baffle filter
Painting filter with silicon wool or aluminum grid
Aluminum or plastic exhaust pipe
Available powder coating: Black/White/Gray etc.
110V or 220V Available

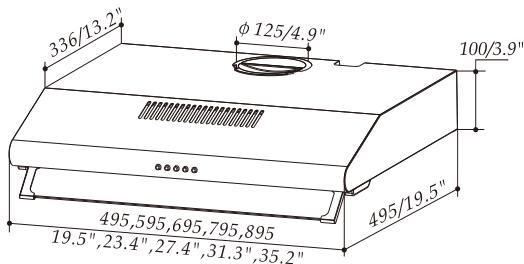

SLIM HOOD



TF26




► Features

Size	60 cm (24 in)
Material	Inox 430 SS body
Airflow	Housing A(60W motor)-200m³/h (100CFM)
Noise level	≤55 dB
Switch	1-Speed rocker switch
Lighting	1x1.5W LED
Filter	3-Layer aluminium grease filter



► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	558x135x456	595x180x530	458/1127 pcs

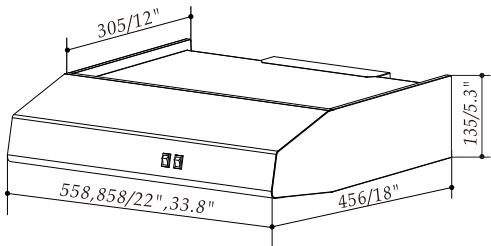

TF27



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Metal
Airflow	Housing B(2x130W motor)-1000m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3xBaffler filters
Others	φ 195mm Outlet dimension




► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	755x210x560	830x315x660	150/400 pcs
90 cm 36 in	905x210x560	980x315x660	130/340 pcs

► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available
Aluminum or plastic exhaust pipe

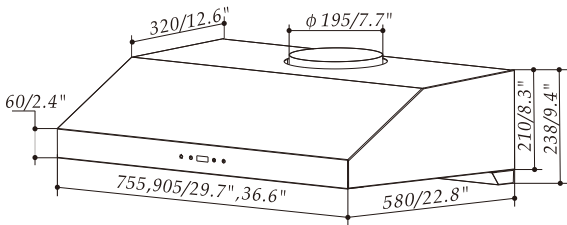

TF28



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body
Housing	Metal
Impeller	Metal
Airflow	Housing A4(1x150W motor)-500m³/h (294 CFM)
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2-Layer aluminium grease filters
Others	With φ 150mm outlet dimension




► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	755x150x500	810x205x555	315/860 pcs
90 cm 36 in	895x150x500	950x205x555	270/740 pcs

► Optional

Touch switch /Electronic switch
Baffle filter
Aluminum or plastic exhaust pipe
Available powder coating: Black/White/Gray etc.
110V or 220V Available

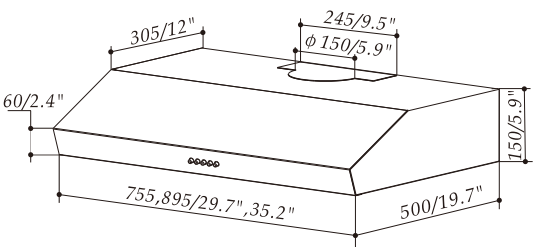

SLIM HOOD



TF30



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Metal
Airflow	Housing B(2x130W motor)-1000m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3xBaffler filters
Others	φ 195mm Outlet dimension




► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	755x254x560	830x410x660	110/300 pcs
90 cm 36 in	895x254x560	970x410x660	90/220 pcs

► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available
Aluminum or plastic exhaust pipe

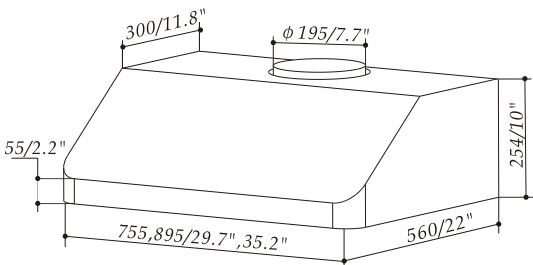

SLIM HOOD



TF32



► Features


Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Metal
Airflow	Housing A6(1x230W motor)-500m³/h (294 CFM)
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x5W LED
Filter	2-Layer aluminium grease filter
Others	φ 178 mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	758x127x457	840x190x520	288/745 pcs
90 cm 36 in	908x127x457	990x190x520	252/645 pcs

► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available
Aluminum or plastic exhaust pipe

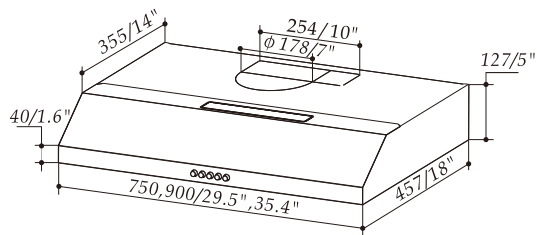

TF33



► Features


Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Metal
Airflow	Housing A6(1x230W motor)-500m³/h (294 CFM)
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x5W LED
Filter	2 x hybrid filter
Others	φ 178 mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	758x178x457	840x240x520	240/615 pcs
90 cm 36 in	908x178x457	990x240x520	216/525 pcs

► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available
Aluminum or plastic exhaust pipe

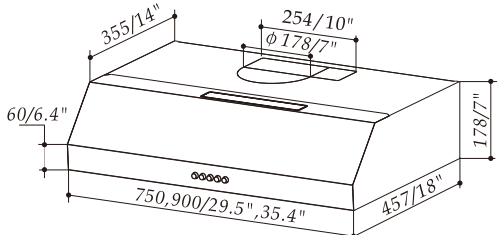

SLIM HOOD



TF34



► Features


Size	60/75/90 cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Plastic
Airflow	Housing A5(1x60W motor)-200m³/h (100 CFM)
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	2-Layer aluminium grease filter
Others	Square outlet

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x100x480	630x140x520	291/1365 pcs
75 cm 30 in	750x100x480	785x140x520	508/1158 pcs
90 cm 36 in	895x100x480	930x140x520	394/935 pcs

► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available

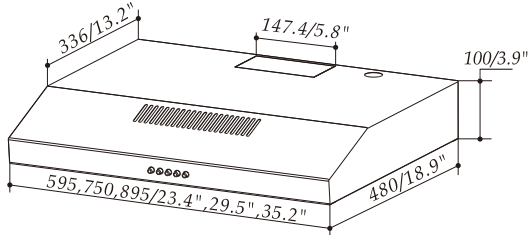

TF35



► Features


Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing K(1x230W motor)-1000m³/h (588 CFM) Housing P(1x160W motor)-400m³/h (235 CFM)
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x3-Layer aluminium grease filter
Others	φ 150mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	750x248x520	815x330x600	126/336 pcs
90 cm 36 in	900x248x520	965x330x600	108/288 pcs



► Optional

Touch switch /Electronic switch
Available powder coating: Black/White/Gray etc.
110V or 220V Available

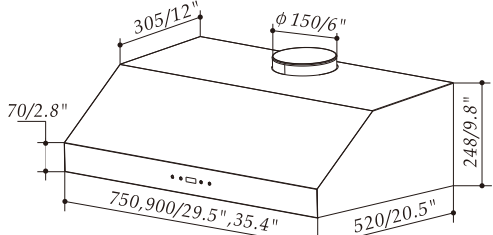

TH Series

THE TELESCOPIC HOOD IS DESIGNED FOR EASY OPERATING AND CLEANING,
THE SLIDING OUT PANEL WITH SIMPLE MOTOR AND LIGHT CONTROL TO FREE
YOUR MIND IN THE KITCHEN.
NOW ARE ALSO HAVE A LOT OF OTHER OPTIONS FOR AIR FLOW AND SWITCH,
GIVE CUSTOMER MORE CHOICE WHEN THEY CHOOSING TELESCOPIC HOOD.

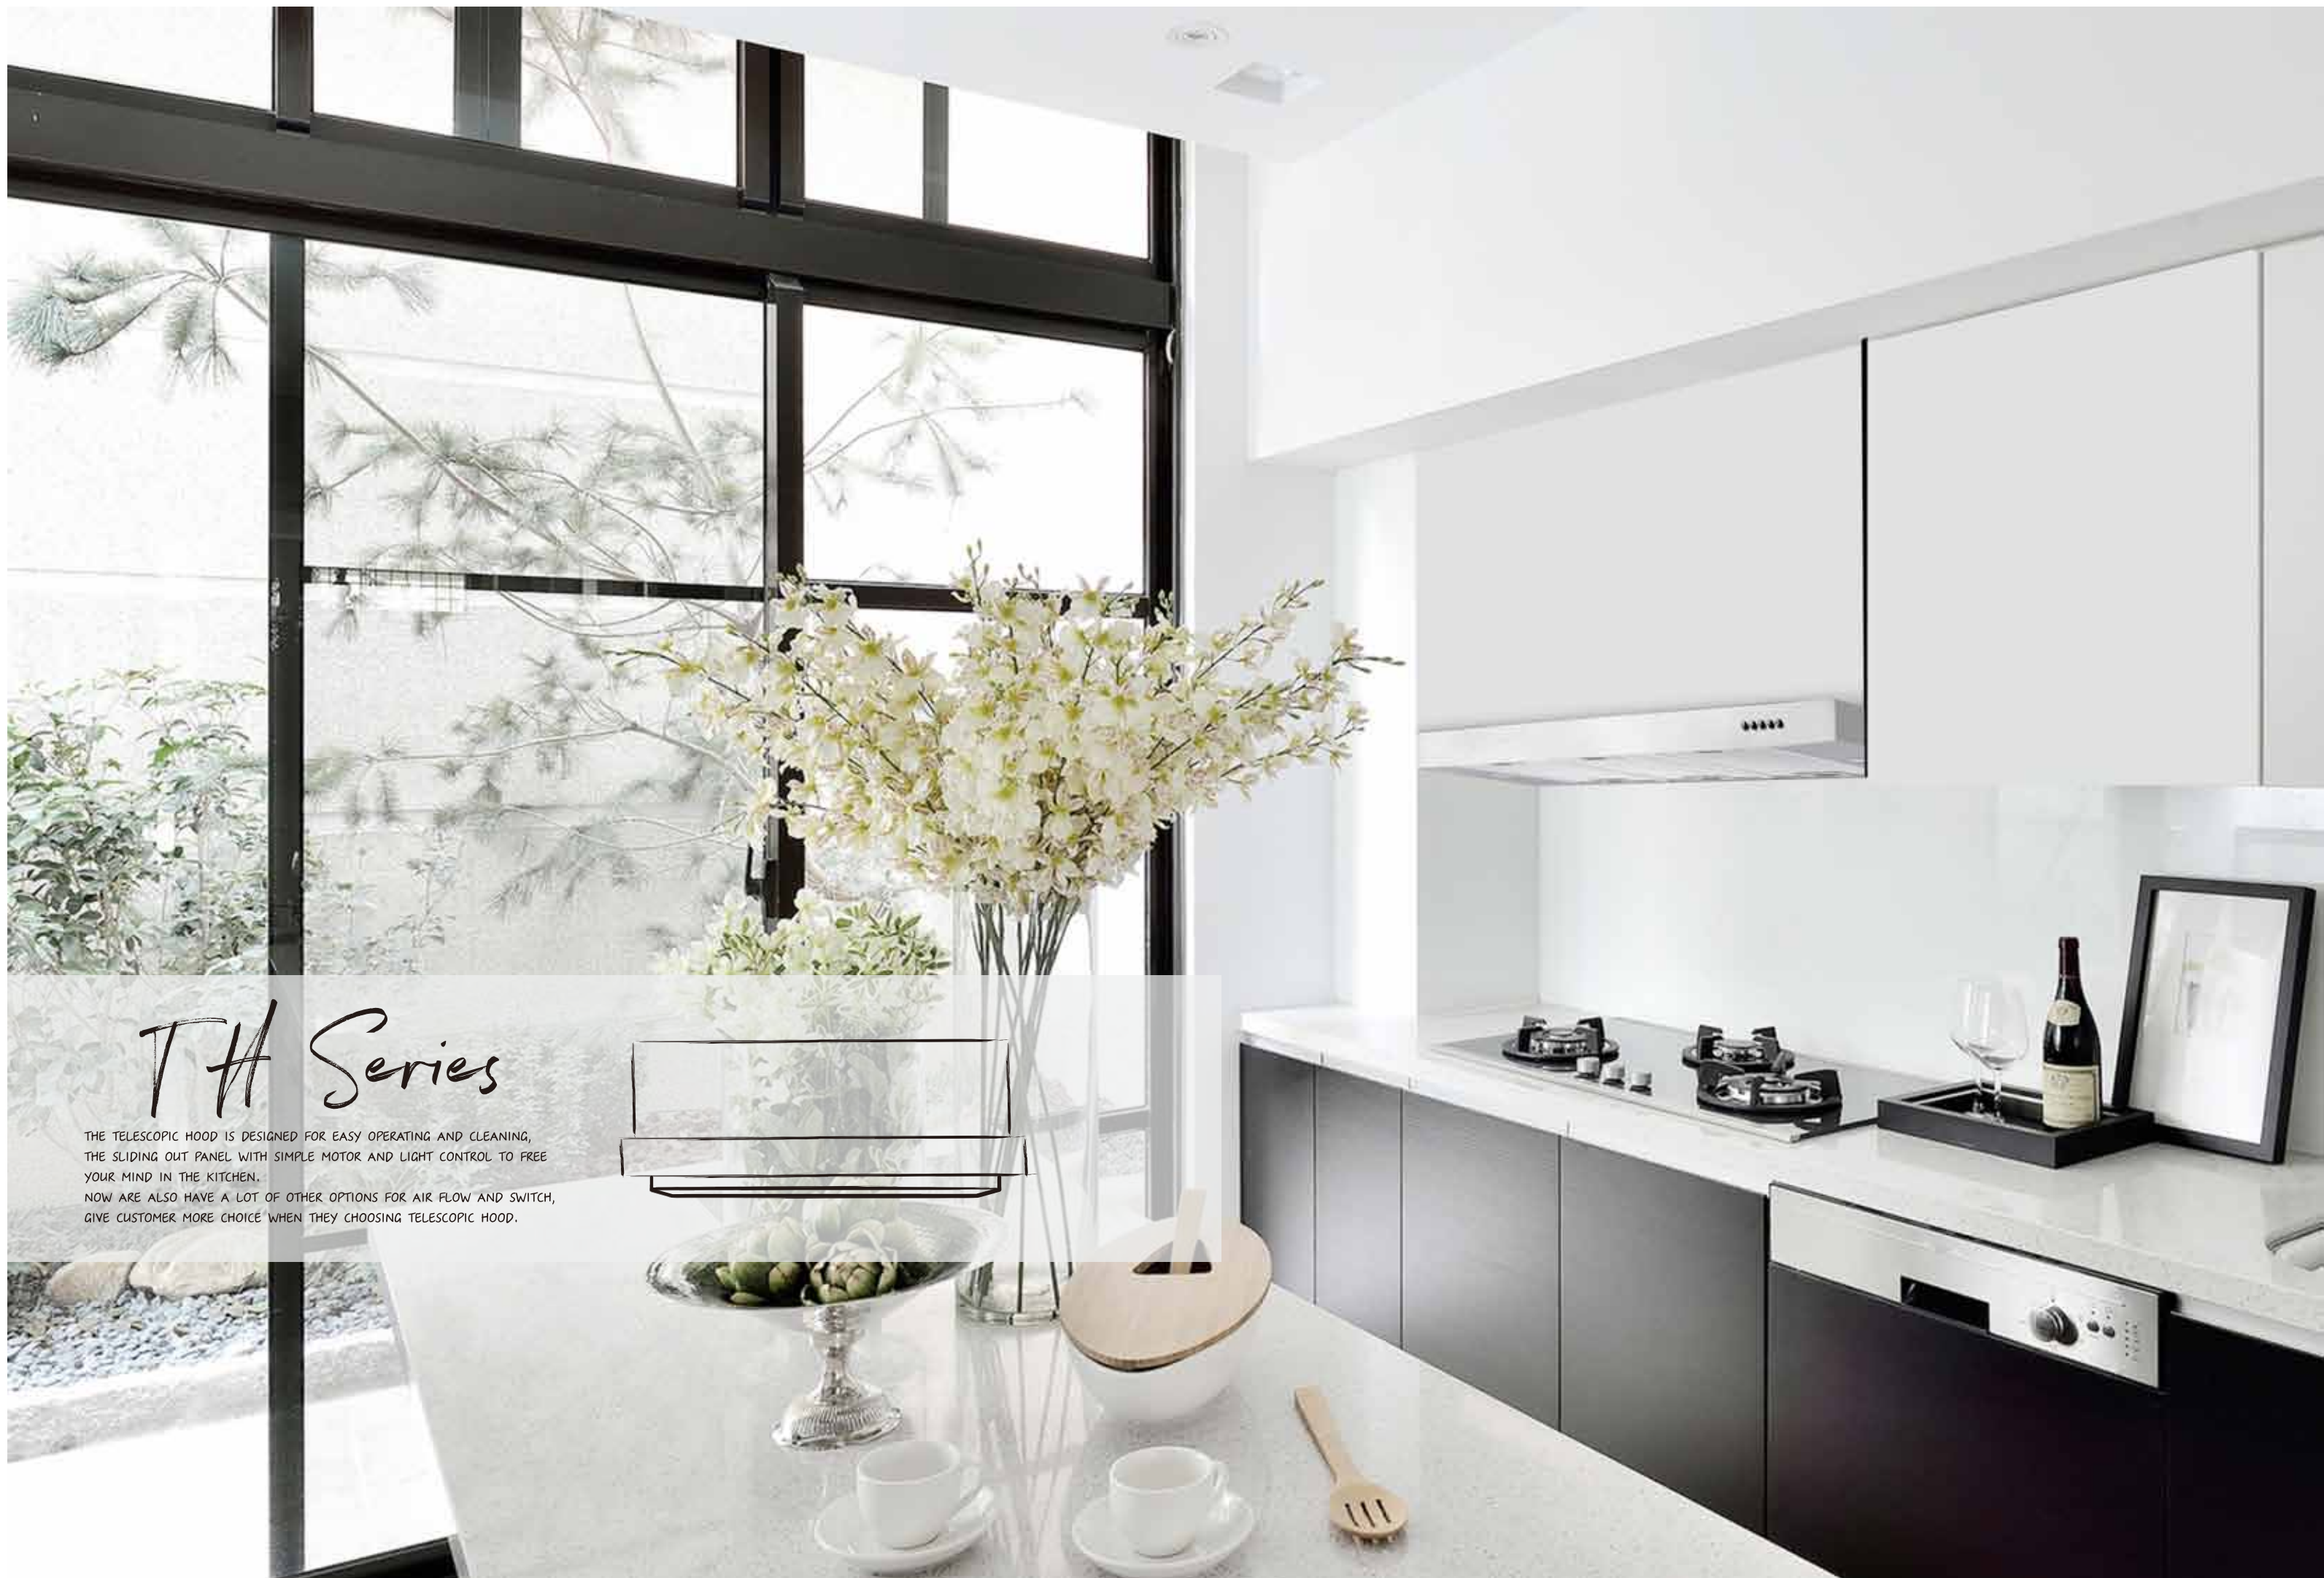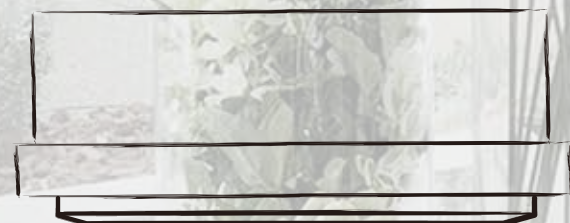




TH TELESCOPIC RANGE HOOD SERIES

The telescopic hood is designed for easy operating and cleaning, the sliding out panel with simple motor and light control to free your mind in the kitchen. Now are also have a lot of other options for air flow and switch, give customer more choice when they choosing telescopic hood.




TH Series more details

Speed settings

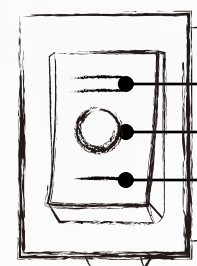


- ① **HIGH** : Switches the fan on at high speed.
- ② **OFF** : Switches the fan off.
- ③ **LOW** : Switches the fan on at low speed.

Light

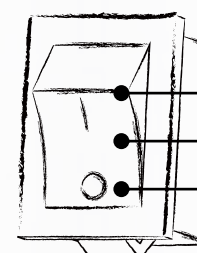

- ④ **ON** : Switches the light system on.
- ⑤ **OFF** : Switches the light system off.
- ⑥ **AUTO** : Light system automatically switches on/off when sliding carriage is opened/closed.

Can be changed to 3 Speed Rocker Switch

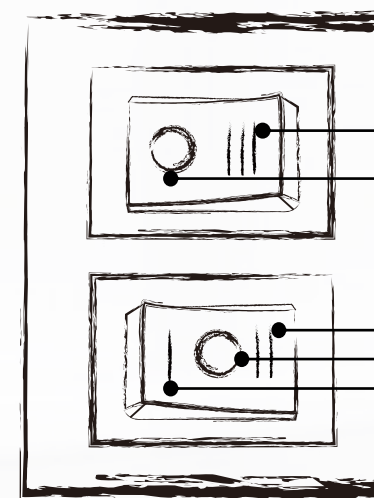


- ① **HIGH** : Switches the fan on at high speed.
- ② **OFF** : Switches the fan off.
- ③ **MEDIUM** : Switches the fan on at medium speed.
- ④ **OFF** : Switches the fan off.
- ⑤ **LOW** : Switches the fan on at low speed.

Rocker switch

The telescopic hood standard uses rocker switch, switch on the left controls the light power, and switch on the right controls the motor levels.

Currently if you don't want rocker switch, you can choose touch or electronicswitch. We have some good choices for you reference.

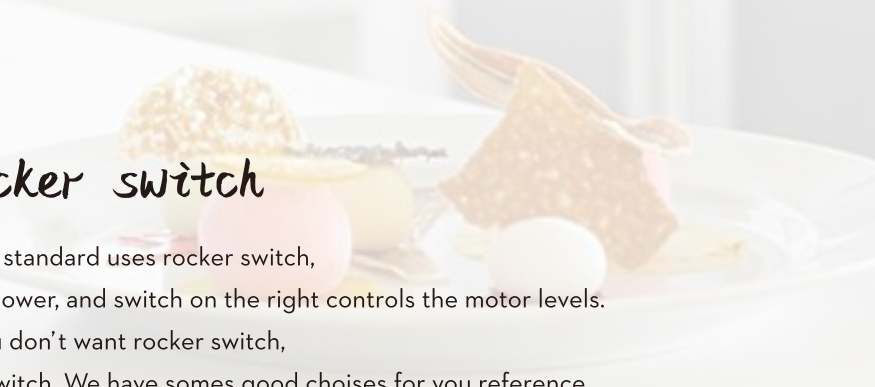

TELESCOPIC HOOD



TH01



► Features


Size	50/60/70/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤50 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	With ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x225x315	540x260x355	600/1350 pcs
60 cm	595x225x315	640x260x355	500/1100 pcs
70 cm	695x225x315	740x260x355	430/1003 pcs
80 cm	795x225x315	840x260x355	370/906 pcs
90 cm	895x225x315	940x260x355	330/785 pcs

► Optional

2xRound charcoal filter
2x1.5W LED
Touch switch /Electronic switch
Aluminum exhaust pipe
110V or 220V Available

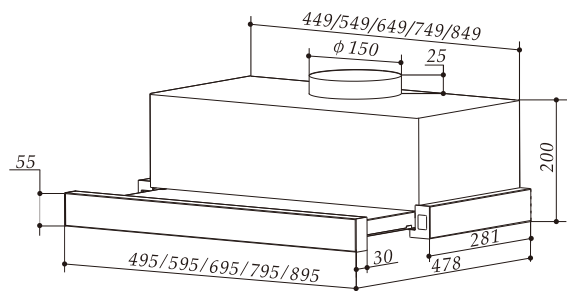

TH02



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A8(1x70W motor)-300 m³/h
Noise level	≤60 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	ϕ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x220x299	640x260x360	480/1111 pcs

► Optional

1xRound charcoal filter

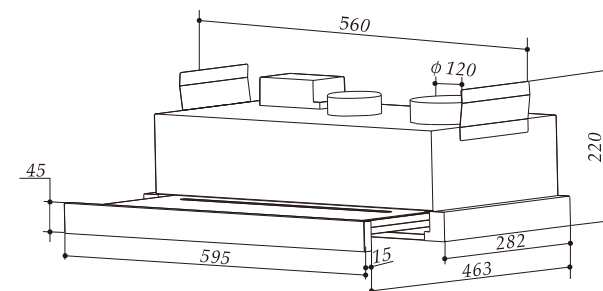

TELESCOPIC HOOD



TH03



► Features


Size	50/60/70/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K (1x230W motor)-750m³/h Housing M (1x130W motor)-550m³/h
Noise level	≤50 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	With ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x290x315	540x325x355	395/1111 pcs
60 cm	595x290x315	640x325x355	381/938 pcs
70 cm	695x290x315	740x325x355	342/790 pcs
80 cm	795x290x315	840x325x355	300/721 pcs
90 cm	895x290x315	940x325x355	270/620 pcs

► Optional

2xRound charcoal filter
2x1.5W LED
Touch switch /Electronic switch
Aluminum exhaust pipe
110V or 220V Available

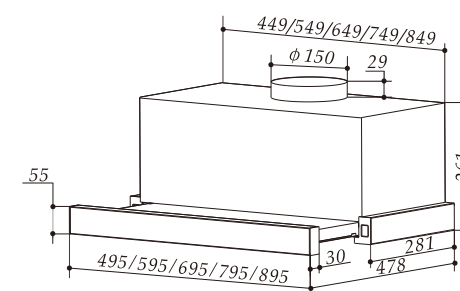

TH04



► Features


Size	50/60/70/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤50 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	With ϕ 150mm outlet dimension

► Packing


	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x225x300	540x260x355	600/1350 pcs
60 cm	595x225x300	640x260x355	500/1100 pcs
70 cm	695x225x300	740x260x355	430/1003 pcs
80 cm	795x225x300	840x260x355	370/906 pcs
90 cm	895x225x300	940x260x355	330/785 pcs

► Optional

3-Speed rocker switch
2xRound charcoal filter
2x1.5W LED
Aluminum exhaust pipe
110V or 220V Available

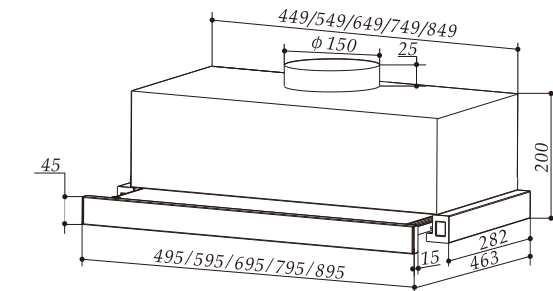

TELESCOPIC HOOD

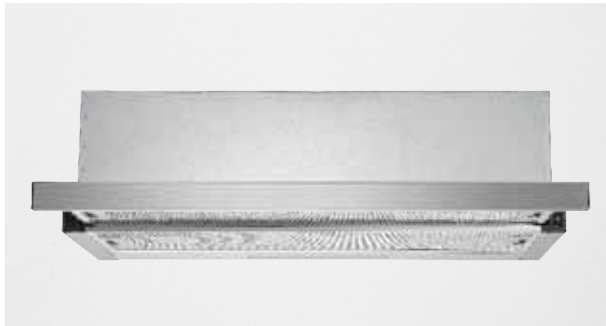

TH05



► Features


Size	50/60/70/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K (1x230W motor)-750m³/h Housing M (1x130W motor)-550m³/h
Noise level	≤50 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	With ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x290x300	540x325x355	395/1111 pcs
60 cm	595x290x300	640x325x355	381/938 pcs
70 cm	695x290x300	740x325x355	342/790 pcs
80 cm	795x290x300	840x325x355	300/721 pcs
90 cm	895x290x300	940x325x355	270/620 pcs

► Optional

3-Speed rocker switch
2xRound charcoal filter
2x1.5W LED
Aluminum exhaust pipe
110V or 220V Available

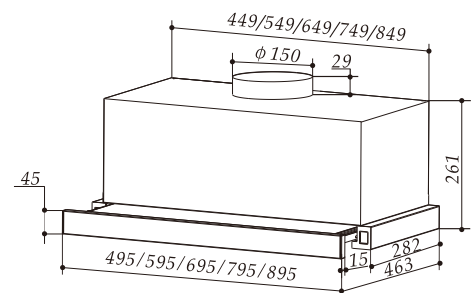

TH09



► Features


Size	50/60/70/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing A (1x80W motor)-200m³/h Housing B (2x80W motor)-400m³/h
Noise level	≤60 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	ϕ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x161x300	540x205x345	600/1470 pcs
60 cm	595x161x300	640x205x345	594/1368 pcs
70 cm	695x161x300	740x205x345	525/1092 pcs
80 cm	795x161x300	840x205x345	438/952 pcs
90 cm	895x161x300	940x205x345	410/854 pcs

► Optional

3-Speed rocker switch
2xRound charcoal filter
2x1.5W LED
110V or 220V Available

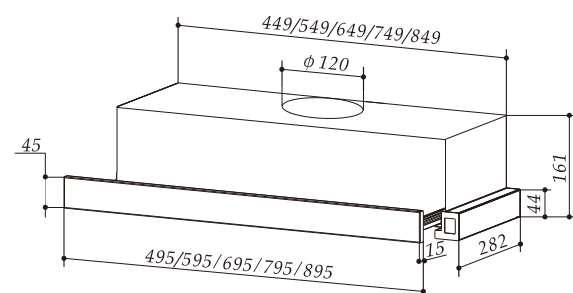

TELESCOPIC HOOD



TH10



► Features



Size	60/70/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Plastic
Impeller	Plastic
Airflow	Housing B (2x80W motor)-400m³/h
Noise level	≤60 dB
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	2x3-Layer aluminium grease filter
Others	ϕ 120mm Outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x161x300	640x205x345	594/1368 pcs
70 cm	695x161x300	740x205x345	525/1092 pcs
80 cm	795x161x300	840x205x345	438/952 pcs
90 cm	895x161x300	940x205x345	410/854 pcs

► Optional

3-Speed rocker switch
2xRound charcoal filter
2x1.5W LED
110V or 220V Available

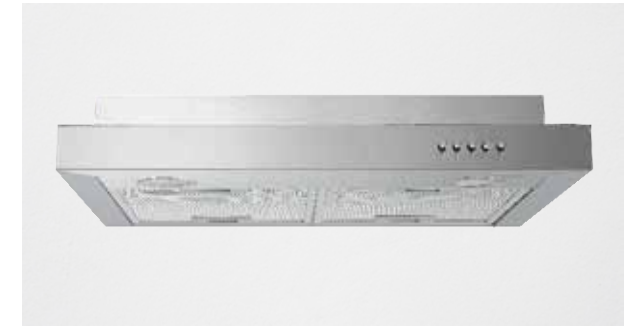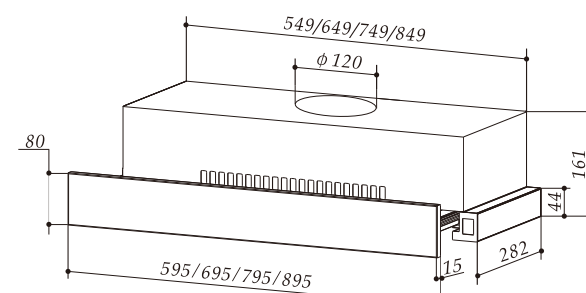

TH11



► Features


Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing B (2x80W motor)-400m³/h
Noise level	≤ 65 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	5-Layer aluminum grease filter

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x120x420	640x165x470	630/1275 pcs
90 cm	895x120x420	940x165x470	430/870 pcs


► Optional

2xRound charcoal filter
110V or 220V available

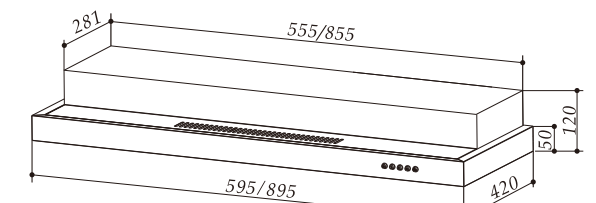

TB Series

CEILING BUILT-IN HOOD,
SAVE YOUR SPACE IN THE CABINET,
AND GIVE THE SAME COOKING EXPERIENCE AS OTHER DESIGNS.

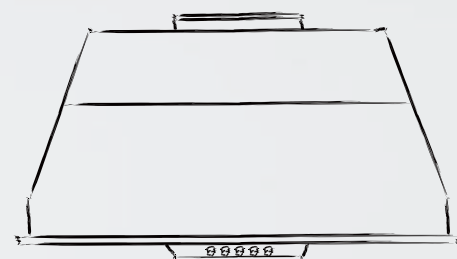



TB BUILT-IN RANGE HOOD SERIES

The built-in hood, save your space in the cabinet,
and give the same cooking experience as other designs.



BUILT-IN HOOD



TB01



► Features


Size	52/72 cm
Material	Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x296	580x330x340	558/1071 pcs
72 cm	725x291x296	780x330x340	308/756 pcs

► Optional

2xRound charcoal filter
110V or 220V available
Oil cup

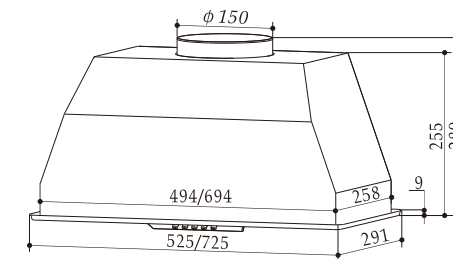

TB02



► Features


Size	52/72 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x287	580x330x340	558/1071 pcs
72 cm	725x291x287	780x330x340	308/756 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
110V or 220V available
Oil cup

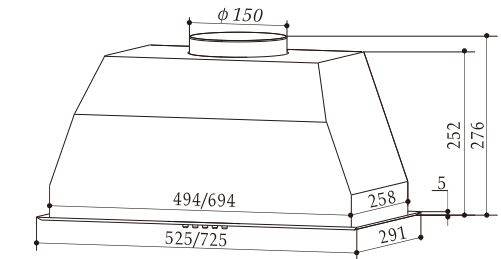

BUILT-IN HOOD



TB03



► Features


Size	52/72 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing A (1x80W motor)-200 m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with φ 120mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x141	580x330x190	660/1560 pcs
72 cm	725x291x141	780x330x190	484/1144 pcs

► Optional

Round charcoal filter
3-Speed touch switch
110V or 220V available

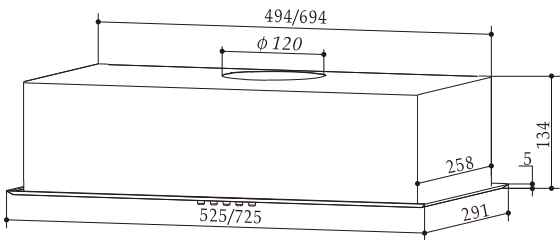

TB04



► Features


Size	52/72 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with φ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x291	580x330x340	558/1071 pcs
72 cm	725x291x291	780x330x340	308/756 pcs

► Optional

2xRound charcoal filter
1x2W LED
3-Speed touch switch
110V or 220V available
Oil cup

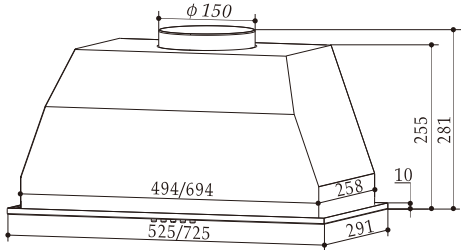

BUILT-IN HOOD



TB05



► Features


Size	52/72 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing A (1x80W motor)-200 m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with φ 120mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x145	580x330x190	660/1560 pcs
72 cm	725x291x145	780x330x190	484/1144 pcs

► Optional

Round charcoal filter
1x2W LED
3-Speed touch switch
110V or 220V available

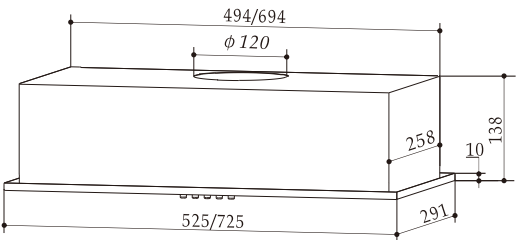

TB06



► Features


Size	52/72 cm
Material	Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	1x3-Layer aluminum grease filter with φ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	520x295x352	555x330x380	345/894 pcs
72 cm	720x295x352	755x330x380	255/630 pcs

► Optional

2xRound charcoal filter
3-Speed push button
110V or 220V available
Oil cup

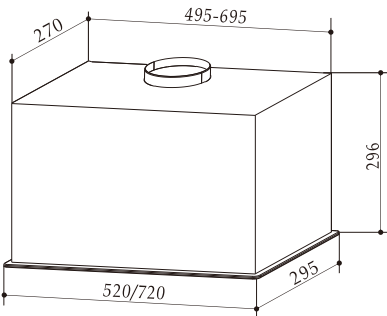

BUILT-IN HOOD



TB07



► Features


Size	52/72 cm
Material	Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	520x295x352	555x330x380	345/894 pcs
72 cm	720x295x352	755x330x380	255/630 pcs

► Optional

2xRound charcoal filter
3-Speed push button
110V or 220V available
Oil cup

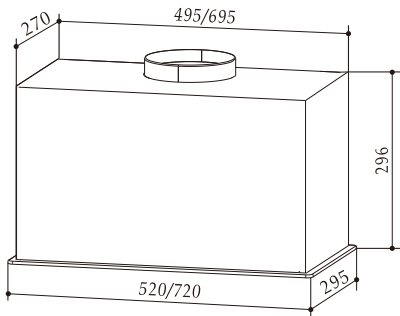

TB08



► Features


Size	52/72 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350 m ³ /h Housing P (1x160W motor)-400 m ³ /h
Noise level	≤50 dB
Switch	3-Speed push button
Lighting	2x2W Square Lamp
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	520x295x207	555x330x245	621/1380 pcs
72 cm	720x295x207	755x330x245	459/1020 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
110V or 220V available

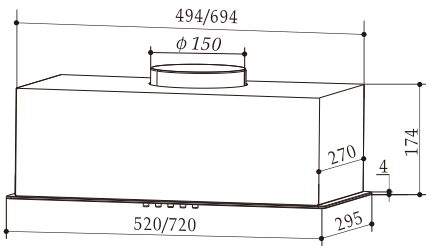

BUILT-IN HOOD



TB09



► Features


Size	52/72 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x287	580x330x340	558/1071 pcs
72 cm	725x291x287	780x330x340	308/756 pcs

► Optional

2xRound charcoal filter
1x2W LED
3-Speed touch switch
110V or 220V available
Oil cup

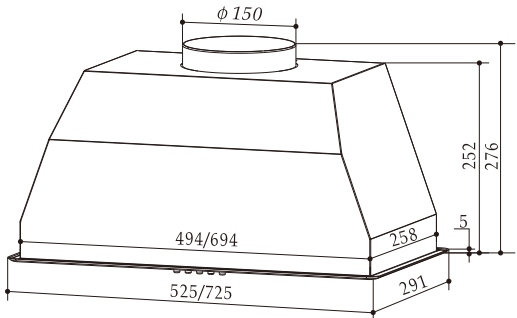

TB10



► Features


Size	52/72 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing A (1x80W motor)-200 m ³ /h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter with ϕ 120mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x141	580x330x190	660/1560 pcs
72 cm	725x291x141	780x330x190	484/1144 pcs

► Optional

Round charcoal filter
1x2W LED
3-Speed touch switch
110V or 220V available

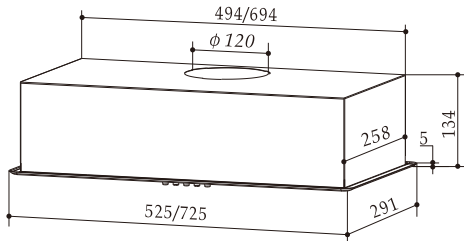

BUILT-IN HOOD



TB11



► Features


Size	52 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350 m ³ /h Housing P (1x160W motor)-400 m ³ /h
Noise level	≤50 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x291x198	575x340x250	585/1340 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
110V or 220V available

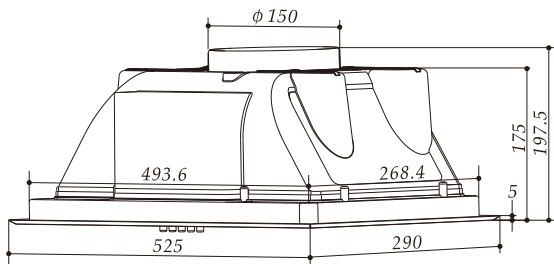

TB12



► Features


Size	52/72 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350 m ³ /h Housing P (1x160W motor)-400 m ³ /h
Noise level	≤50 dB
Switch	3-Speed touch switch
Lighting	1x2W LED
Filter	1x3-Layer aluminum grease filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
52 cm	525x283x205	560x330x250	633/1448 pcs
72 cm	725x283x305	760x330x250	468/1068 pcs

► Optional

2xRound charcoal filter
3-Speed push button
110V or 220V available

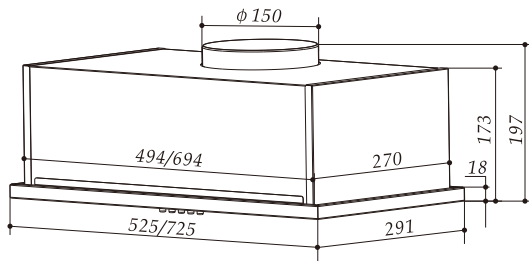

BUILT-IN HOOD



TB13

► Features


Size	70 cm/27 in
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2xBaffler filter with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
70 cm 27 in	705x289x291	770x345x355	288/693 pcs

► Optional

2xRound charcoal filter
With 2x3-Layer aluminum grease filter
3-Speed touch switch
110V or 220V available
Oil cup

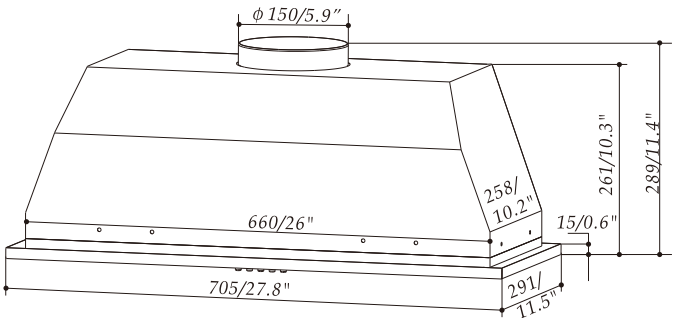

TD Series

REASONABLE AND CONCISE DESIGN CAN BE BETTER
MATCH THE KITCHEN AND MAKE IT BE A HARMONIOUS WHOLE.





TD PYRAMID

RANGE HOOD SERIES

Reasonable and concise design can be better match the kitchen and make it be a Harmonious whole.



PYRAMID HOOD



TD06



► Features


Size	50/60/70/75/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing S(1x65W motor)-350m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤55 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x198x480	540x230x540	376/940 pcs
60 cm	595x198x480	640x230x540	324/850 pcs
90 cm	895x198x480	940x230x540	216/536 pcs

► Optional

- 2xRound charcoal filter
- Baffler filter
- 2nd Chimney
- 110V or 220V Available
- 2x1.5W LED

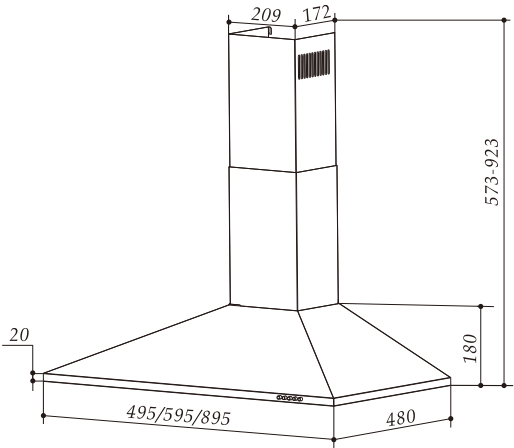

TD07



► Features


Size	60/75/90/100/110 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h Housing P (1x160W motor)-400m ³ /h
Noise level	≤55 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x272x500	640x315x560	252/576 pcs
75 cm	745x272x500	790x315x560	196/456 pcs
90 cm	895x272x500	940x315x560	168/392 pcs

► Optional

- 2xRound charcoal filter
- Touch switch /Electronic switch
- Baffler filter
- 2nd Chimney
- 110V or 220V available
- Oil Cup

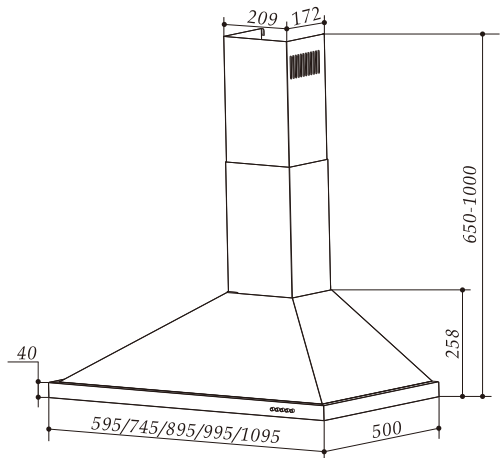

PYRAMID HOOD



TD08



Features


Size	60/75/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤55 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x261x480	645x295x525	252/665 pcs
75 cm	745x261x525	795x295x525	196/500 pcs
90 cm	895x261x480	945x295x525	168/430 pcs

Optional

2xRound charcoal filter
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V Available

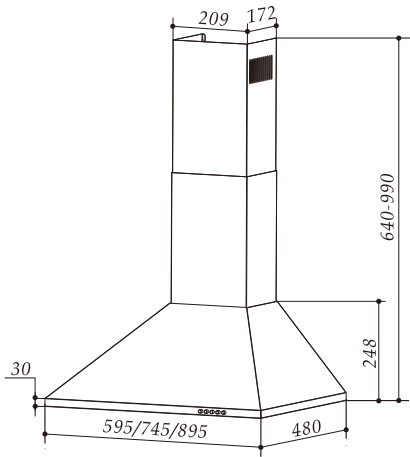

TD09



Features


Size	60/75/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K(1x230W motor)-750m ³ /h Housing C(1x230W motor)-750m ³ /h
Noise level	≤55 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x292x500	640x325x560	252/576 pcs
75 cm	745x292x500	790x325x560	196/456 pcs
90 cm	895x292x500	940x325x560	168/392 pcs

Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V Available
Oil cup

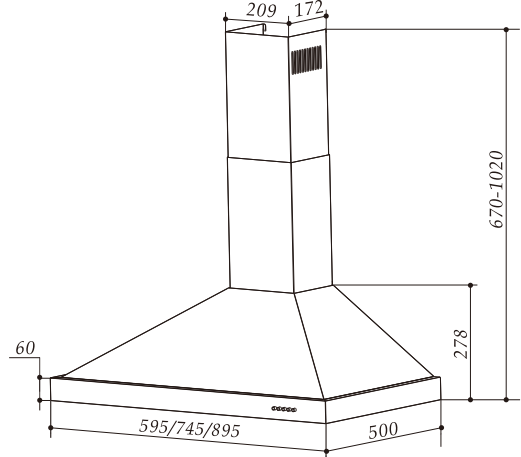

TD10



Features


Size	60/75/90 cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing C(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤55 dB
Switch	3-Speed touch switch
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 30 in	595x272x500	640x315x560	252/576 pcs
75 cm 30 in	745x272x500	790x315x560	196/456 pcs
90 cm 36 in	895x272x500	940x315x560	168/392 pcs

Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V Available
Oil cup

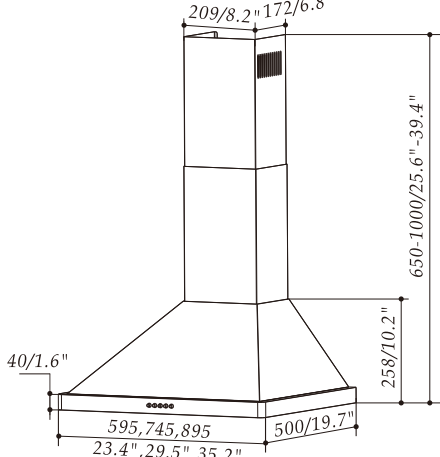

PYRAMID HOOD



TD11



Features


Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤55 dB
Switch	3-Speed push button
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x332x500	640x375x560	216/504 pcs
90 cm	895x332x500	940x375x560	144/344 pcs

Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V Available
Oil cup

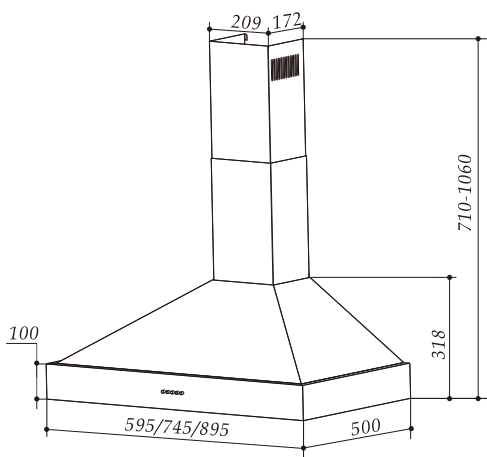

PYAMID HOOD



TD12



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h
Noise level	≤55 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x292x500	640x325x560	252/630 pcs
90 cm	895x292x500	940x325x560	168/430 pcs

► Optional

2xRound charcoal filter
Baffler filter
touch switch
2nd Chimney
110V or 220V available

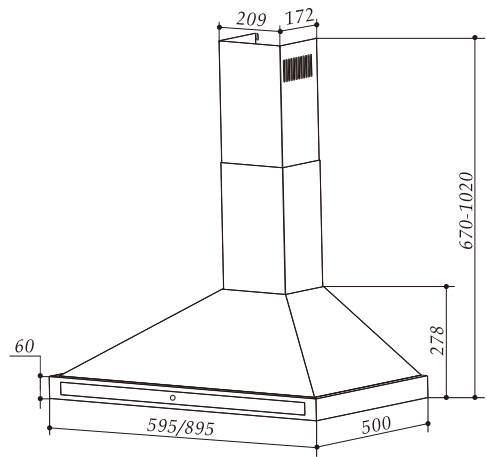

TD13



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing H (1x230W motor)-1000m ³ /h Housing C (1x230W motor)-750m ³ /h Housing K (1x230W motor)-750m ³ /h
Noise level	≤55 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x398x500	950x430x550	120/288 pcs

► Optional

2xRound charcoal filter
Push switch / Electronic switch
Baffler filter
2nd Chimney
110V or 220V available

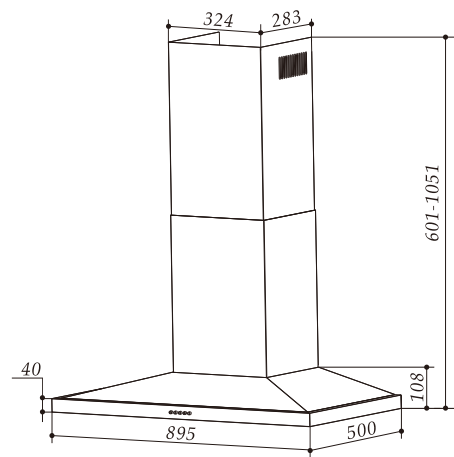

PYAMID HOOD



TD14



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H (2x230W motor)-2000m ³ /h Housing C (2x230W motor)-1600m ³ /h
Noise level	≤70 dB
Switch	3-Speed push button
Lighting	4x1.5W LED
Filter	3x5-Layer aluminum grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x332x500	945x388x550	120/288 pcs

► Optional

2xRound charcoal filter
Touch switch / Electronic switch
2nd Chimney
110V or 220V available
Oil Cup

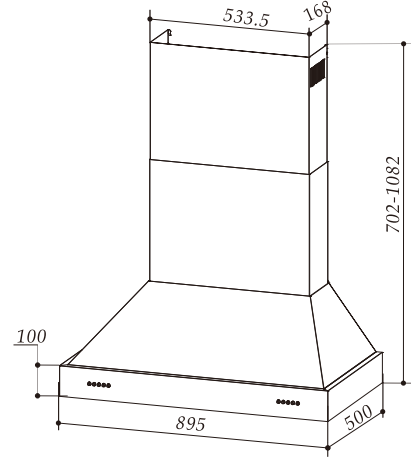

TD15



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing P(1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤55 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x260x500	790x340x550	190/459 pcs
90 cm 36 in	895x260x500	940x340x550	163/378 pcs

► Optional

2xRound charcoal filter
Push switch / Electronic switch
Baffler filter
2nd Chimney
110V or 220V available

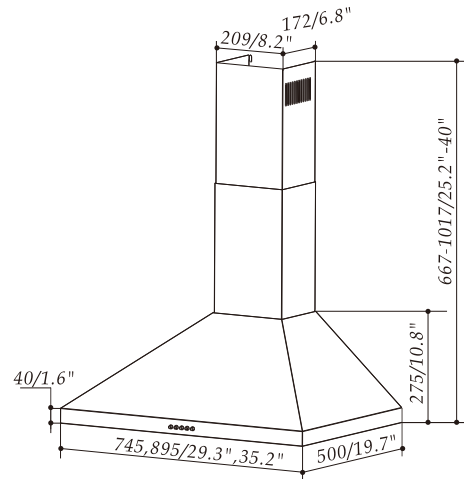

PYAMID HOOD



TD16



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h (441 CFM) Housing P (1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤55 dB
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x260x500	790x340x550	190/459 pcs
90 cm 36 in	895x260x500	940x340x550	163/378 pcs

► Optional

2xRound charcoal filter
Push switch / Electronic switch
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V available

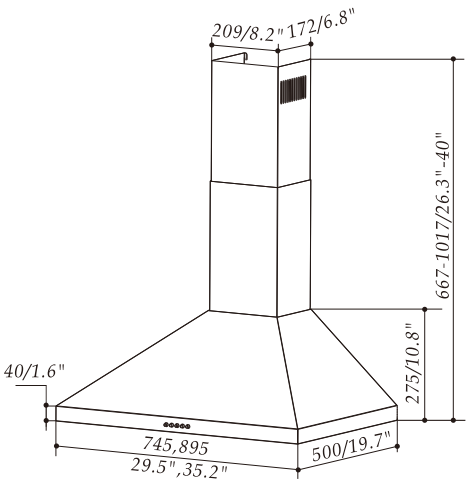

TD17



► Features

Size	60/75/90 cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing S (1x65W motor)-350m ³ /h (206CFM) Housing P (1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤55 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x180x465	640x230x515	355x890 pcs
90 cm 36 in	895x180x465	940x230x515	255x610 pcs

► Optional

2xRound charcoal filter
Touch switch / Electronic switch
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V available

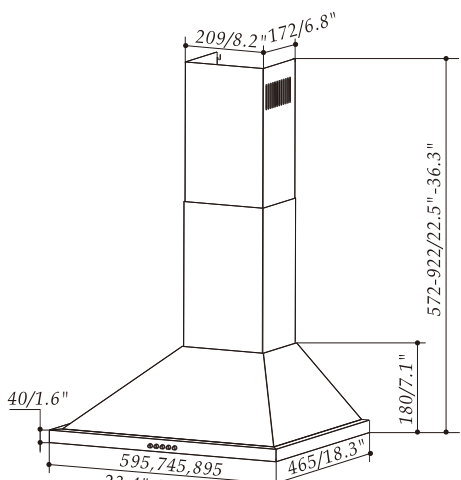

PYAMID HOOD



TD18



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing C (1x230W motor)-750m ³ /h
Noise level	≤ 66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3 x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x332x500	945x375x560	140/336 pcs

► Optional

2xRound charcoal filter
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V available

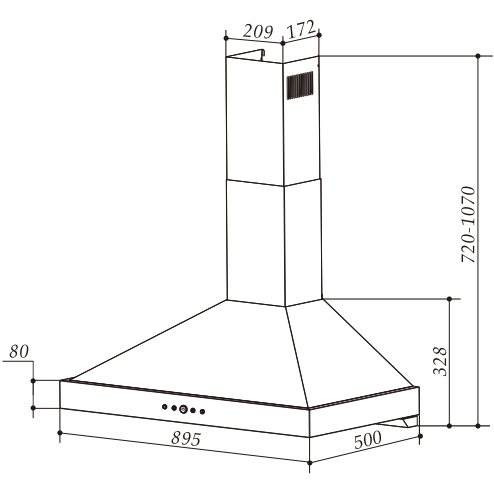

TD19



► Features

Size	60/75/90 cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h (441 CFM) Housing P (1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤55 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x290x500	640x360x555	220/464 pcs
75 cm 30 in	790x325x560	850x380x590	196/408 pcs
90 cm 36 in	895x290x500	940x325x550	168/280 pcs

► Optional

2xRound charcoal filter
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V available

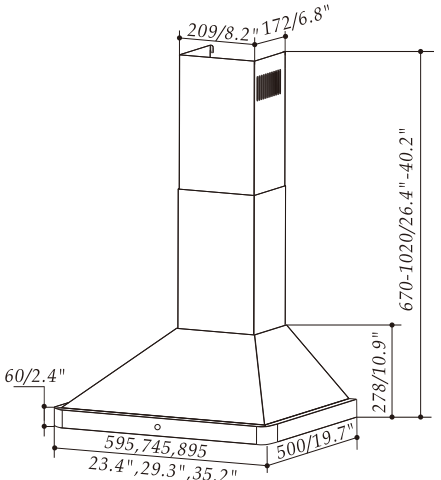

PYAMID HOOD



TD20



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing D (1x70W motor)-650m³/h
Noise level	≤ 65 dB
Switch	3-Speed push button
Lighting	1x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	598x458x590	645x508x650	115/309 pcs

► Optional

2xRound charcoal filter
Baffler filter
2x1.5W LED
2nd Chimney
110V or 220V available

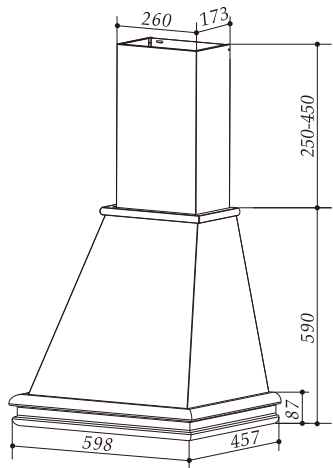

TD21



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing D (1x70W motor)-650m³/h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	2x1.5W LED
Filter	3x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	590x442x300	640x490x520	156/420 pcs

► Optional

2xRound charcoal filter
Touch switch / Electronic switch
Baffler filter
2nd Chimney
110V or 220V available

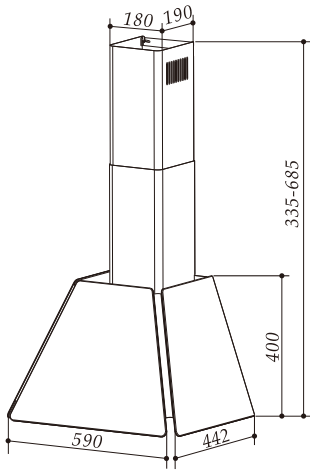

PYAMID HOOD



TD22



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing M (1x130W motor)-550m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1xmetal filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x335x500	640x435x560	190/370 pcs

► Optional

Available power coating: Black/white/Gray etc.
110V or 220V available

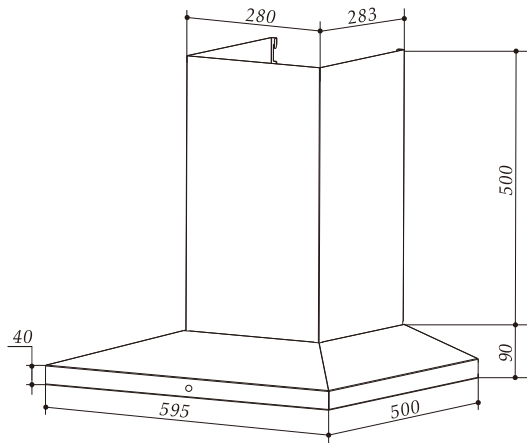

TD23



► Features


Size	60/75/90 cm
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x290x500	940x325x550	96/280 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

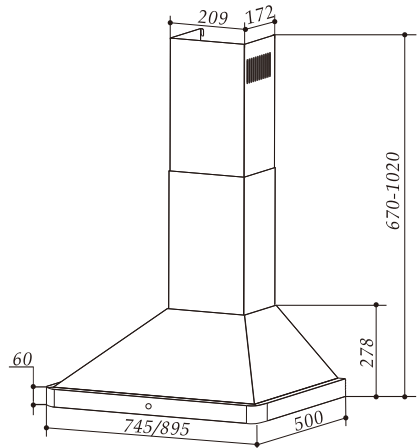

PYAMID HOOD



TD24



► Features


Size	75 cm (30 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h (206CFM) Housing P(1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x198x481	790x230x540	260/520 pcs

► Optional

Push button/Electronic switch
Available power coating: Black/white/Gray etc.
110V or 220V available

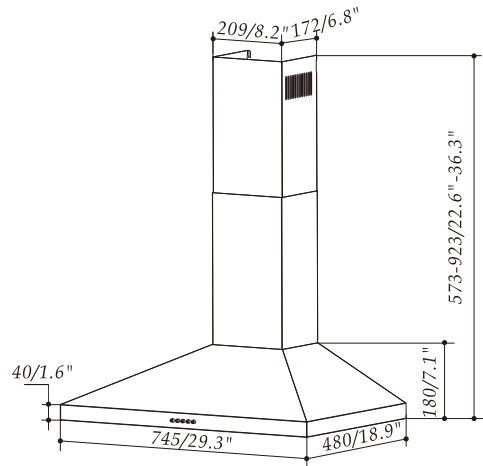

TD25



► Features


Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h (206CFM) Housing P(1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x198x481	790x230x515	260/650 pcs
90 cm 36 in	895x198x481	940x230x515	216/550 pcs

► Optional

Touch switch/Electronic switch
Available power coating: Black/white/Gray etc.
110V or 220V available

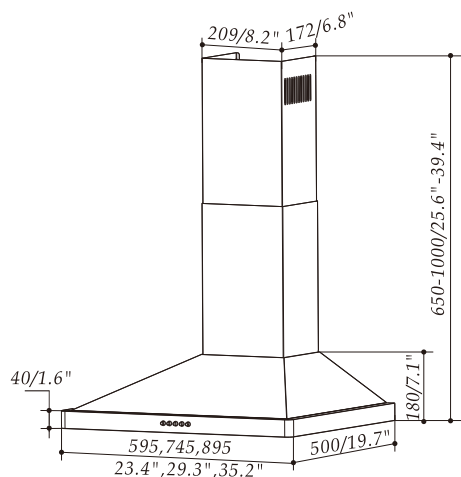

TD26



► Features


Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x380+1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	900x80x620	965x525x670	75/192 pcs

► Optional

Push button/Electronic switch
Available power coating: Black/white/Gray etc.
110V or 220V available

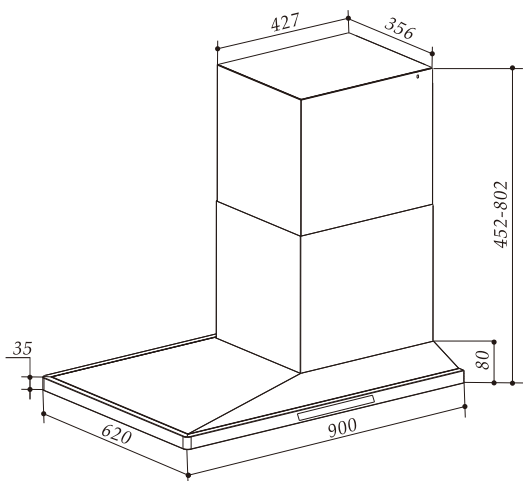

PYAMID HOOD



TD27



► Features


Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	1x2W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x380+1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	900x80x620	965x525x670	75/192 pcs

► Optional

Touch switch/Electronic switch
Available power coating: Black/white/Gray etc.
110V or 220V available

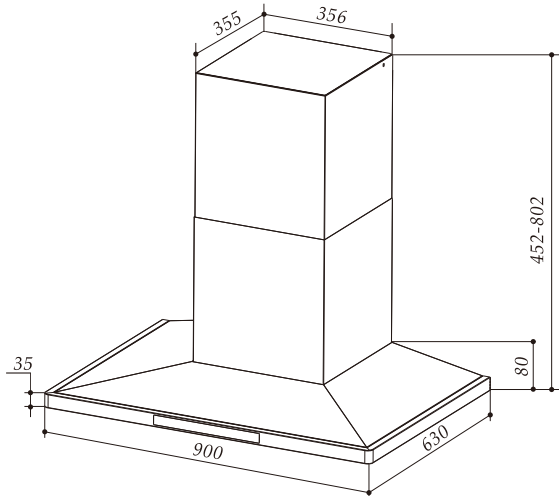



TG Series

CLASSIC CURVED GLASS DESIGN,
THE MOST CLASSIC RANGE HOOD EVER,
CHOOSE CURVED GLASS DESIGN,
CHOOSE CLASSIC.



TG GLASS RANGE HOOD SERIES

Classic curved glass design, the most classic range hood ever,
choose curved glass design, choose classic.



TG Series exploded view

The chimney hanger

It is to hanger the chimney without putting the chimney on the product. It is very easy to fix and unfix without using any more toll and tightening parts. It will also help to save labor cost when maintaining.

PATENT NUMBER 201620535493.3

6mm Tempered glass

Perfect angle, Rohs certificated ink, gap between glass and body within 0.5mm.

The PCB board

Cables and connectors are include in the control box. All plastic parts are using 94VO/5VA fire-resistance material, applied to Rohs and Reach certification. The stand-by power for all electric unit is below 0.3W, applied to ERP energy saving requirement.

Switch


Have options of push switch, electrical switch with light ring, touch switch and touch switch with remote.

Light

Using 9 chips LED light, high efficiency and brightness low power can reach to 100lux/pcs. ERP level(Light efficiency class) is A. Have option to choose among LED light, normal bulb and halogen light.


The airflow system

The most important part for range hood. The airflow system can reach to Max Energy Efficiency class of A++. The max air flow can reach to 1000m³/h, the lowest noise level can control at 40dba. Can also go with all aluminum housing for a better looking.

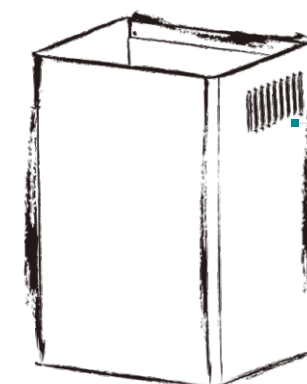

Exhaust holes for recycling

It will help to filtrate the smoke and send back to the room. We can choose carbon filter, anion purification or vitamin C filter to carry out the filtration.

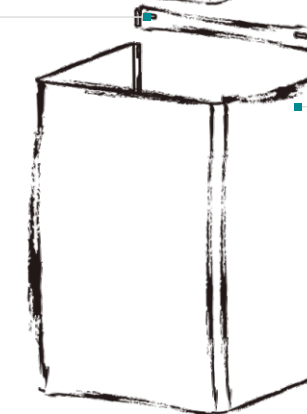


Chimney have different height option

400/500/600mm, we are using SUS430,600# polishing, the surface film is 0.07mm extra thickness for a better protection. Special design of hanging chimney, simple and nice.



Product hanger

hold the product and fix on the wall, using 1.5mm thick high strength steel. Special designed arc shape for a better contact with wall to avoid the product from listing.

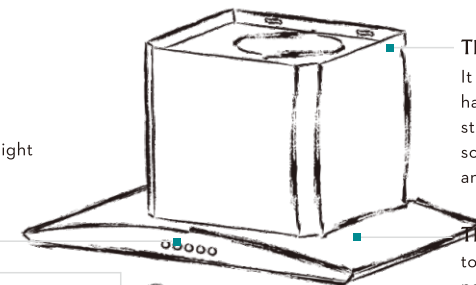


The cabinet

It is using TOX riveting technology, the upper hanging part using 0.8mm steel to ensure the strong structure and low noise. No welding point, no need screws, good sealing without leaking smoke. Nice and neat!



The main body is using 0.6mm or above material to ensure a strong structure and flatness. The front panel using 600# second time polishing to gain a perfect finishing. The punching gap is controlled within 0.05mm, the edge uses laser welding to ensure the strength and tightness.

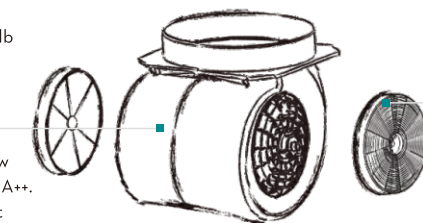

Carbon filter

We can fix carbon filter on the air inlets, the thickness of carbon filter is less than 25mm contains lots of carbon, can absorb the smoking efficiently for a better air condition in the kitchen.



5 layers thickening aluminum filter

can filtrate the oil efficiently. The outer sheet is 0.4mm, and frame using 0.9mm aluminum profile. High strengthen and low deformation. Have option of using 2 layers baffle filter, more high end and durability; easily washing, also have special design of anti-dropping hook, avoid the baffle filter from dropping by accident.

PATENT NUMBER 201620542624.0

GLASS HOOD



TG15



► Features


Size	50/60/70cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x320x470	615x385x545	180/444 pcs
60 cm	595x335x470	640x400x545	180/432 pcs
70 cm	695x355x470	740x410x545	152/372 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

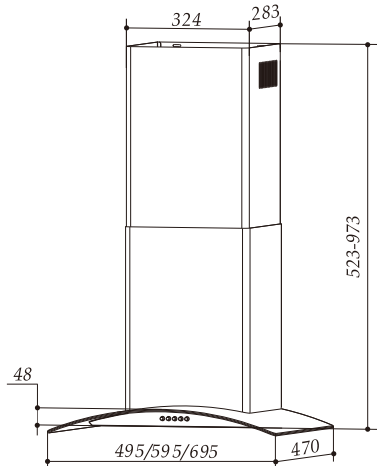

TG16



► Features


Size	60/70/75/90cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing C(1x230W motor)-750m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x331x470	640x385x545	180/500 pcs
70 cm	695x334x470	740x385x545	152/435 pcs
75 cm	745x343x470	800x415x545	140/344 pcs
90 cm	895x368x470	940x435x545	120/288 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

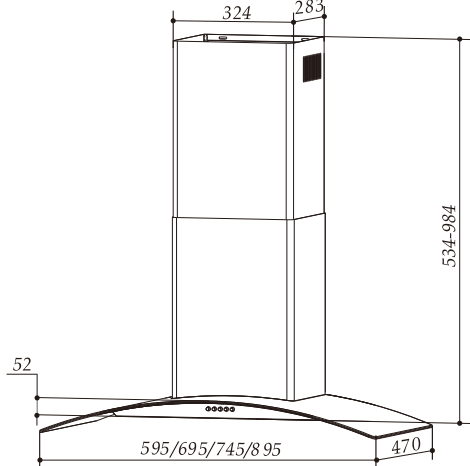

GLASS HOOD



TG17



► Features


Size	60/70 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing C(1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x335x470	640x385x545	180/500 pcs
70 cm	695x335x470	695x335x470	152/435 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

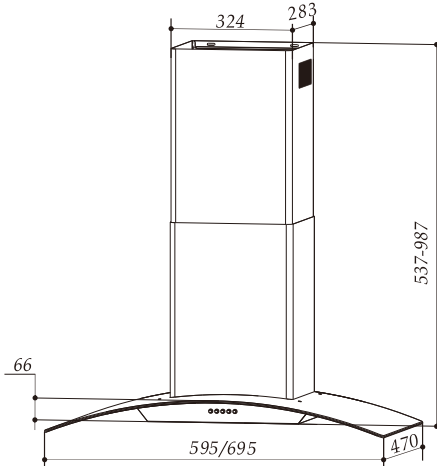

TG18



► Features


Size	60/70/75/90cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-900m ³ /h (529 CFM) Housing C(1x230W motor)-750m ³ /h (441 CFM) Housing K(1x230W motor)-750m ³ /h (441 CFM)
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x345x470	640x385x545	180/500 pcs
70 cm	695x345x470	740x385x545	152/435 pcs
75 cm 30 in	745x345x470	800x415x545	140/344 pcs
90 cm 36 in	895x368x470	940x435x545	120/288 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

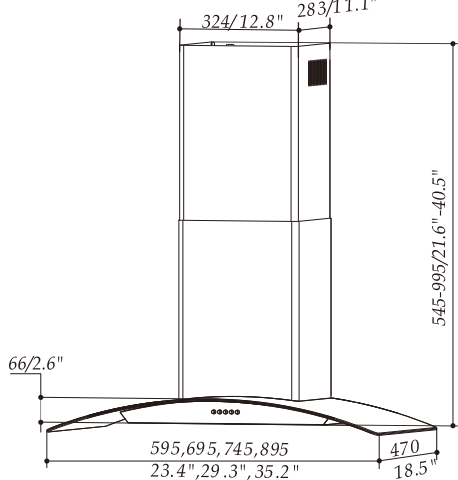

GLASS HOOD



TG19



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x333x470	640x405x545	180/432 pcs
70 cm	695x333x470	740x385x545	125/435 pcs
90 cm	895x333x470	940x405x545	120/300 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

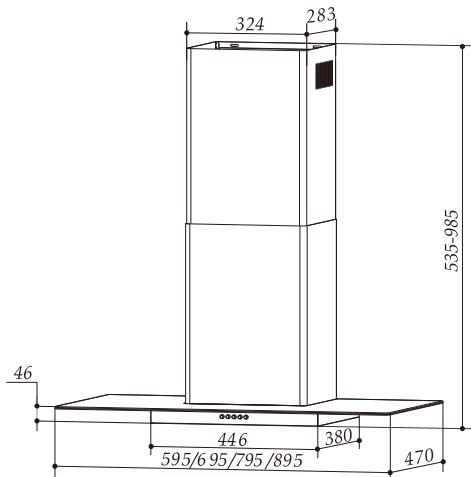

TG20



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing C(1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x350x470	640x405x545	180/432 pcs
70 cm	695x333x470	740x385x545	125/435 pcs
90 cm	895x350x470	940x405x545	120/300 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

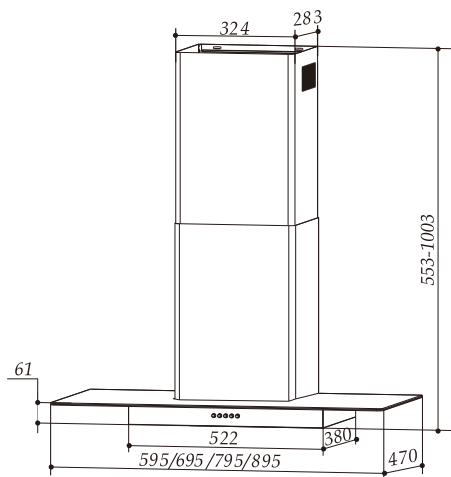

GLASS HOOD



TG24



► Features

Size	60/75/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x333x470	640x405x545	180/432 pcs
75 cm	745x333x470	940x405x545	120/300 pcs
90 cm	895x333x470	940x405x545	120/300 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

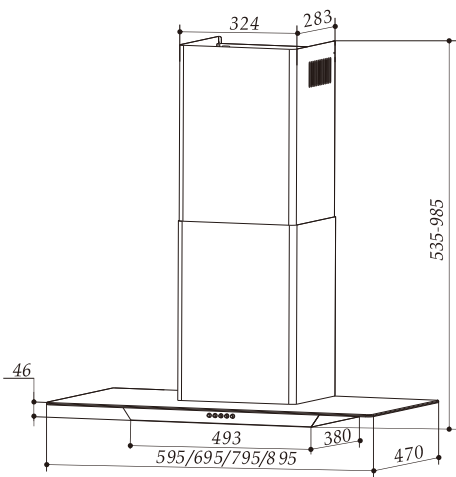

TG26



► Features

Size	60/70/90 cm (24/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-900m ³ /h (529 CFM) Housing C(1x230W motor)-750m ³ /h (441 CFM) Housing K(1x230W motor)-750m ³ /h (441 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x345x470	640x385x545	180/500 pcs
70 cm	695x345x470	740x385x545	152/435 pcs
90 cm 36 in	895x370x470	940x435x545	120/300 pcs

► Optional

2xRound charcoal filter
Push button /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

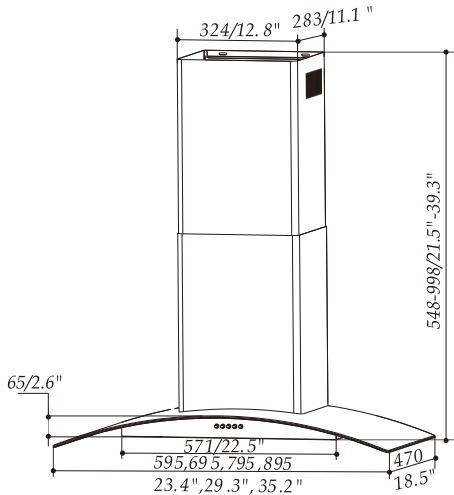

GLASS HOOD



TG29



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-900m ³ /h Housing C(1x230W motor)-750m ³ /h Housing K(1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x350x500	940x385x545	120/334 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

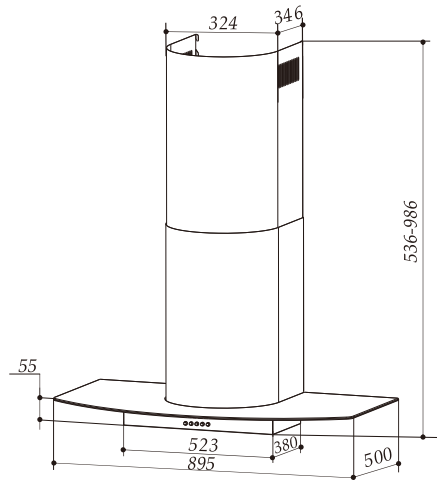

TG32



► Features

Size	90cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-900m ³ /h Housing C(1x230W motor)-750m ³ /h Housing K(1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x333x440	940x405x545	120/300 pcs

► Optional

2xRound charcoal filter 2 pcs
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available
Oil cup

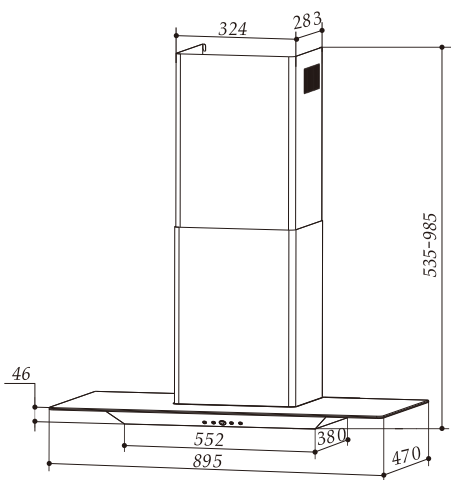

GLASS HOOD



TG33



► Features

Size	60/70/75/90cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h (206CFM) Housing P(1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x316x470	640x375x545	216/504 pcs
70 cm	695x330x470	740x385x545	152/435 pcs
75 cm	745x335x470	800x405x545	140/344 pcs
90 cm 36 in	895x364x470	940x425x545	120/304 pcs

► Optional

1xSquare charcoal filter
3-Speed touch switch
2nd Chimney
110V or 220V Available
Oil cup

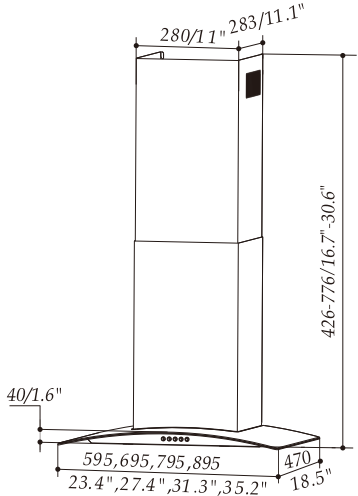

TG34



► Features

Size	60/70/75/90cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h (206CFM) Housing P(1x160W motor)-400m ³ /h (235 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x327x470	640x375x545	216/504 pcs
70 cm	695x331x470	740x385x545	152/435 pcs
75 cm	745x335x470	800x405x545	140/344 pcs
90 cm 36 in	895x364x470	940x425x545	120/304 pcs

► Optional

1xSquare charcoal filter
3-Speed touch switch
2nd Chimney
110V or 220V Available
Oil cup

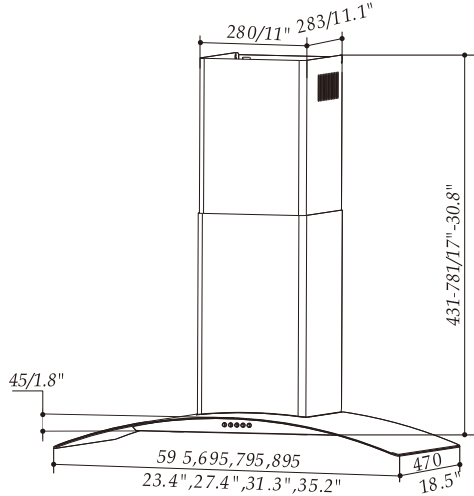

GLASS HOOD



TG35



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m ³ /h Housing P (1x160W motor)-400m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x225x470	640x250x520	324/825 pcs
70 cm	695x240x470	740x250x520	282/690 pcs
90 cm	895x520x470	940x250x520	216/550 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
110V or 220V Available

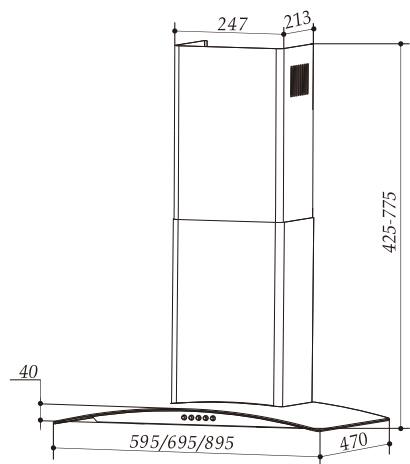

TG36



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m ³ /h Housing P (1x160W motor)-400m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x225x470	640x250x520	324/825 pcs
70 cm	695x240x470	750x250x520	282/690 pcs
90 cm	895x520x470	940x250x520	216/550 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
110V or 220V Available

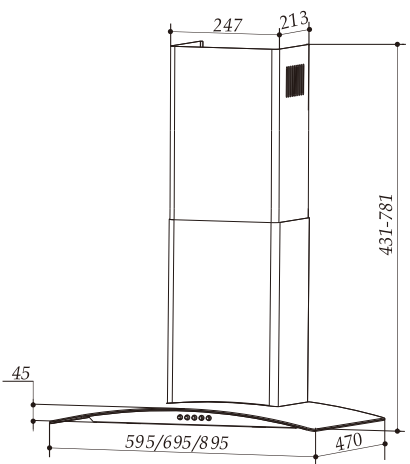

GLASS HOOD



TG37



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing S(1x65W motor)-350m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤ 55 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x316x470	640x375x545	216/504 pcs
70 cm	695x330x470	740x385x545	152/435 pcs
90 cm	895x364x470	940x425x545	120/304 pcs

► Optional

2xRound charcoal filter
Touch switch/Electronic switch
2xBaffler filter
2nd Chimney
110V or 220V available

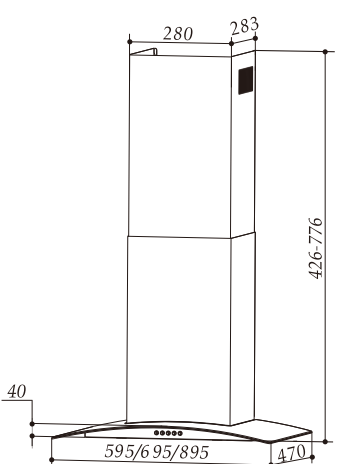

TG38



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S(1x65W motor)-350m ³ /h Housing P(1x160W motor)-400m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x327x470	640x375x545	216/504 pcs
70 cm	695x331x470	740x385x545	152/435 pcs
90 cm	895x364x470	940x425x545	120/304 pcs

► Optional

2xRound charcoal filter
Touch switch/Electronic switch
2xBaffler filter
2nd Chimney
110V or 220V available

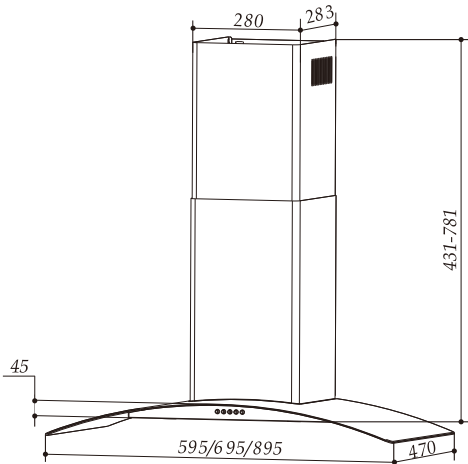

GLASS HOOD



TG39



► Features

Size	60/70 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1 (1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x535x480	645x560x525	144/355 pcs
70 cm	695x535x480	745x560x525	124/300 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

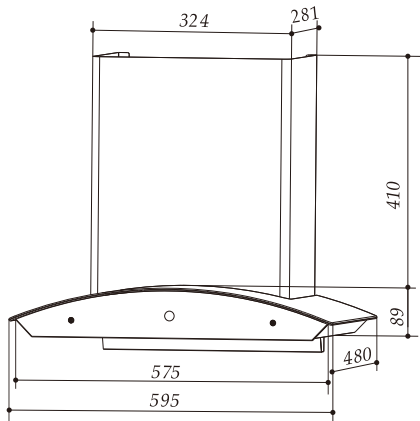

TG40



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1 (1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x535x470	945x560x525	96/240 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

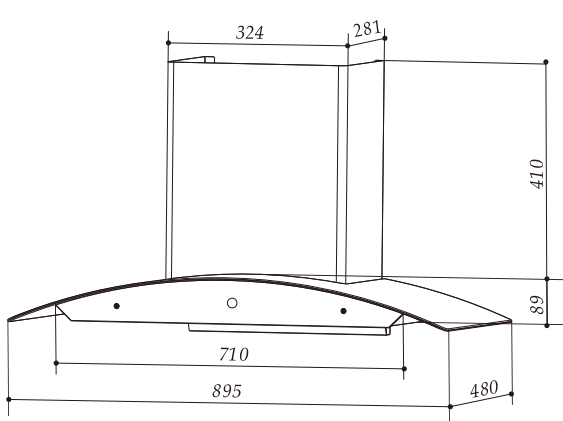

GLASS HOOD



TG42



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Impeller	Plastic
Airflow	Housing S (1x65W motor)-350m ³ /h Housing P (1x160W motor)-400m ³ /h

Noise level	≤ 55 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x350x470	640x385x545	180/500 pcs
90 cm	895x350x470	940x405x545	120/300 pcs

► Optional

2xRound charcoal filter
Touch switch/Electronic switch
Baffler filter
2nd Chimney
110V or 220V available

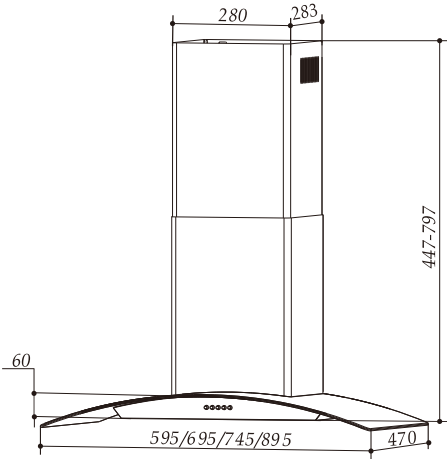

TG43



► Features

Size	60/70/75/90cm (24/30/36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-1000m ³ /h (588 CFM) Housing C(1x230W motor)-800m ³ /h (470 CFM) Housing K(1x230W motor)-750m ³ /h (441 CFM)

Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x353x470	640x385x545	192/408 pcs
70 cm	745x353x470	740x385x545	140/288 pcs
75 cm 30 in	745x353x470	800x415x545	140/288 pcs
90 cm 36 in	895x368x470	940x435x545	124/256 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

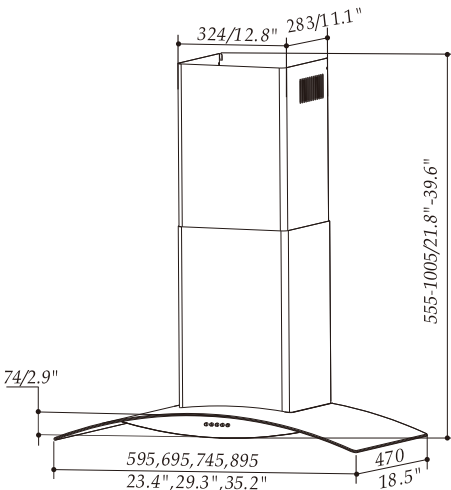

GLASS HOOD



TG45



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1 (1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x535x480	645x560x525	144/355 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

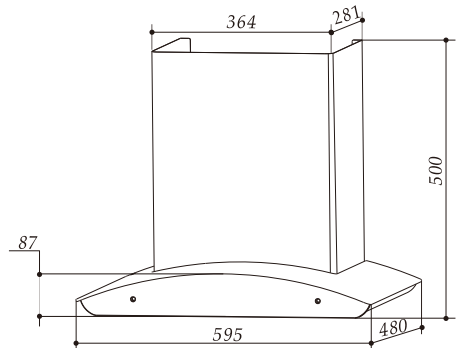

TG46



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1 (1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x535x480	945x560x525	96/240 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

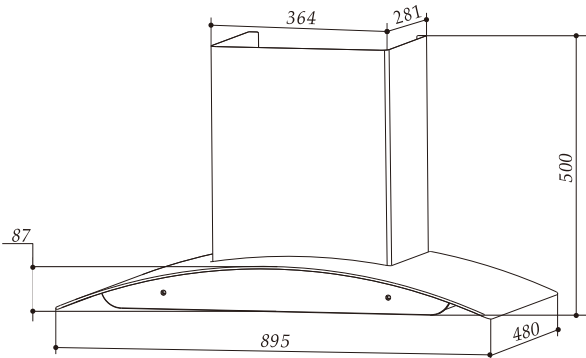

GLASS HOOD



TG47



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1 (1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x535x480	645x560x525	144/355 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

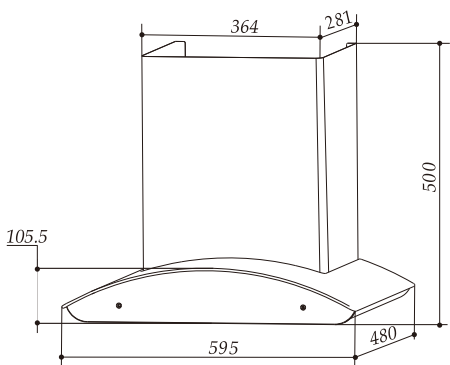

TG48



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1 (1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x535x480	945x575x525	96/240 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

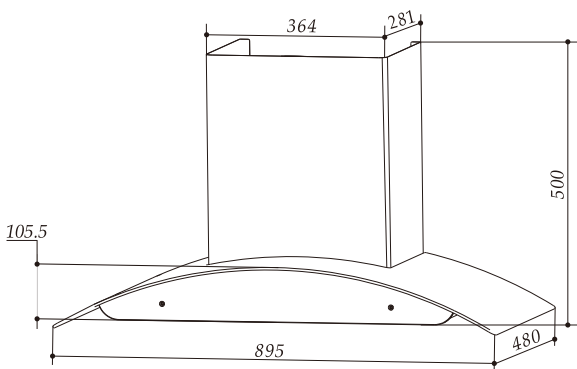

GLASS HOOD



TG49



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1(1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x535x450	645x560x500	144/360 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

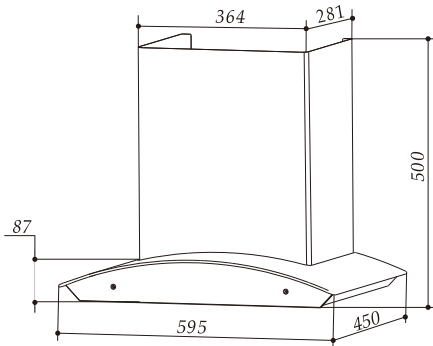

TG50



► Features


Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1(1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x535x450	945x560x500	96/240 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)
1 pc painting filterless

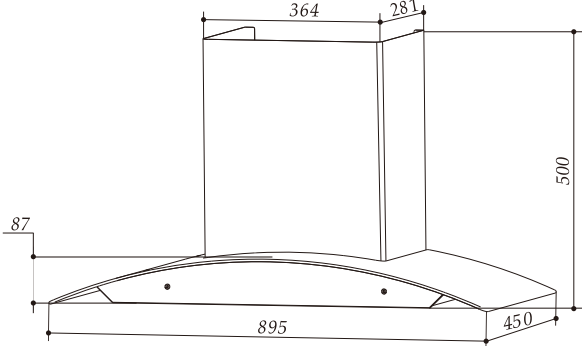

GLASS HOOD



TG51

► Features


Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R1(1x160W motor)-650m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3xBaffler filters
Chimney cover	1x450 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	


► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x535x480	945x560x530	96/240 pcs

► Optional

3-Speed touch switch
2nd Chimney
Black stainless steel chimney
110V or 220V Available

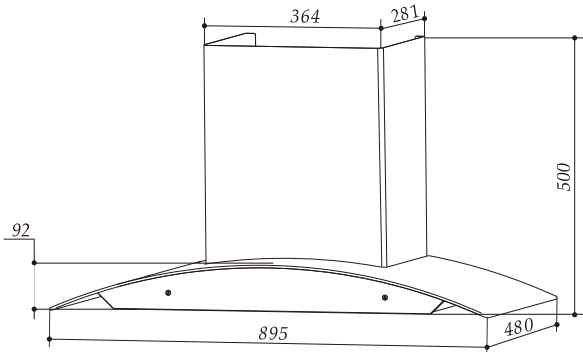

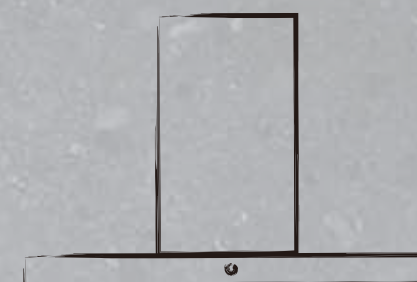

TT Series

T SHAPE. SIMPLE SLIM,
PERFECT PERFORMANCE






TT T SHAPE

RANGE HOOD SERIES

T shape, simple slim, perfect performance



TT Series Heating cleaning

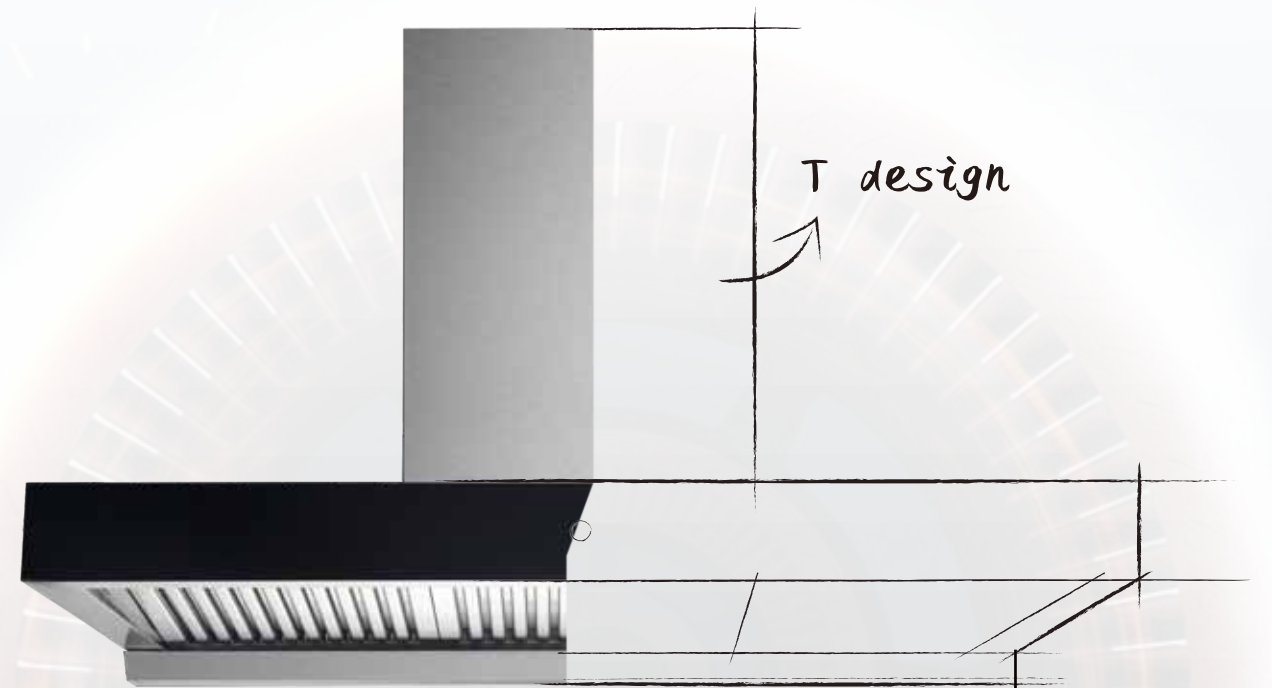

Heating cleaning process



The metal housing temperature can reach to 70°C with the work of heating element.



The high temperature can melt the oil on the housing.



The oil flow down to the oil cup.

We can choose our heat auto clean air flow system for the customer who have heavy smoke and oil in the kitchen. The metal housing temperature can reach to 70°C with the work of heating element. The high temperature can melt the oil on the housing and flow down to the oil cup. This is what we called "heat auto clean" hood. This system already have CB, CE and GS certification.



T SHAPE HOOD



TT06



► Features

Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m³/h Housing M(1x130W motor)-550m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x346x500	640x385x545	208/495 pcs
90 cm	895x346x500	940x385x545	140/328 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
110V or 220V Available

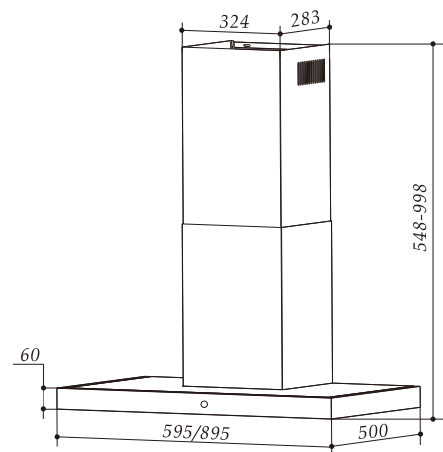

TT07



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m³/h Housing M(1x130W motor)-550m³/h Housing S(1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing


	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x326x500	640x365x545	216/504 pcs
90 cm	895x326x500	940x365x545	144/336 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
110V or 220V Available

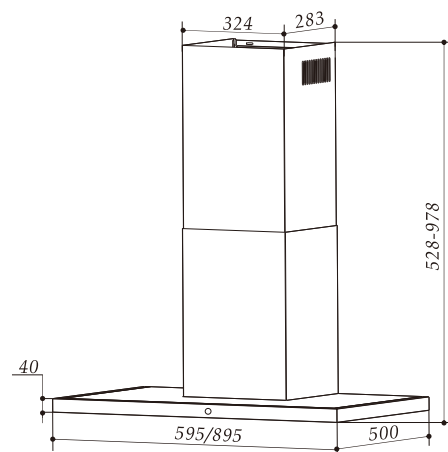

T SHAPE HOOD

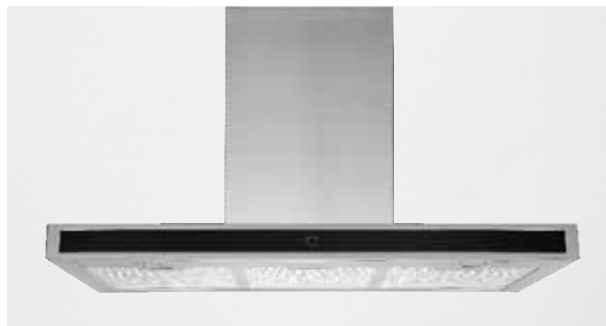

TT09



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m³/h Housing C(1x230W motor)-750m³/h Housing M(1x130W motor)-550m³/h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x346x500	640x385x545	208/495 pcs
90 cm	895x346x500	940x385x545	140/328 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2nd Chimney
110V or 220V Available
Oil cup

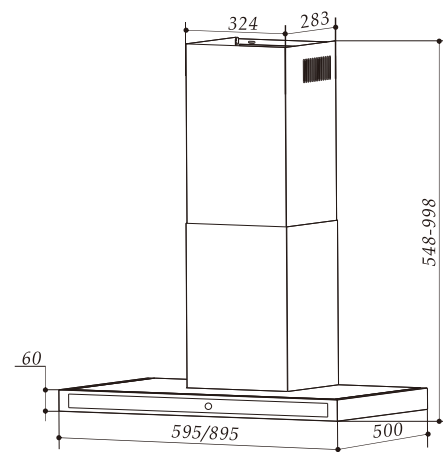

TT10



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m³/h Housing M(1x130W motor)-550m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x386x500	640x430x550	180/474 pcs
90 cm	895x386x500	940x430x550	120/312 pcs

► Optional

2xRound charcoal filter
3-Speed electronic touch switch
Baffler filter
2nd Chimney
Black stainless steel chimney
110V or 220V Available

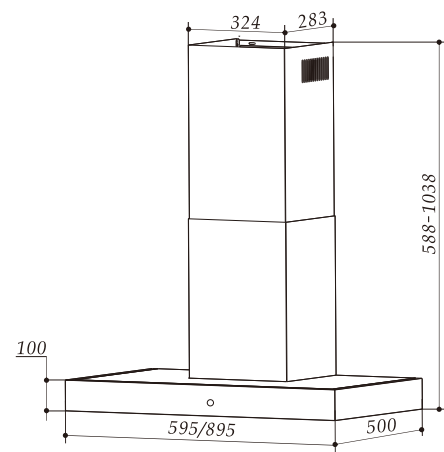

T SHAPE HOOD



TT11



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x312x500	640x365x545	210/504 pcs
90 cm	895x312x500	940x365x545	144/336 pcs

► Optional

2xRound charcoal filter
3-Speed electronic switch
Baffler filter
2nd Chimney
110V or 220V Available
Oil cup

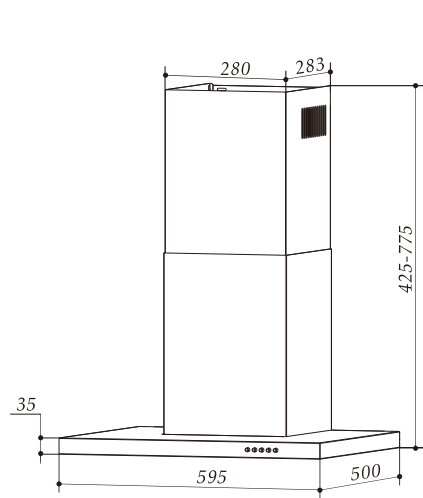

TT12

PATENT
NUMBER 201630205690.4



► Features

Size	90 cm (36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H (1x230W motor)-900m ³ /h (529 CFM) Housing C (1x230W motor)-750m ³ /h (441 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	4x5-Layer aluminium grease filter
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm 36 in	895x386x500	940x430x550	120/312 pcs

► Optional

2xRound charcoal filter
3-Speed electronic switch
Baffler filter
2nd Chimney
110V or 220V Available
Oil cup

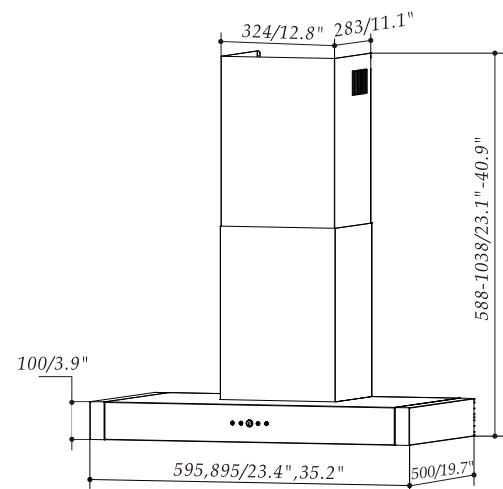

T SHAPE HOOD



TT16



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H (1x230W motor)-900m ³ /h Housing C (1x230W motor)-750m ³ /h Housing K (1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3xBaffler filters
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m plastic exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x411x500	950x430x550	120/312 pcs

► Optional

2xRound charcoal filter
2nd Chimney
Black stainless steel chimney
110V or 220V available

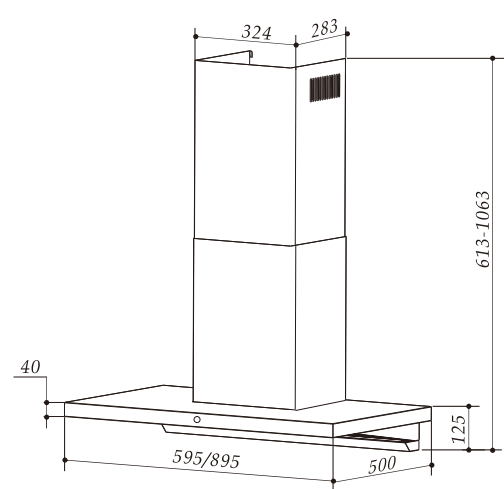

TT18



► Features

Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing C (1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3xBaffler filters
Chimney cover	1x500 mm


With Φ 150mm outlet dimension and 2m plastic exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	895x366x500	950x430x550	120/288 pcs

► Optional

2xRound charcoal filter
2nd Chimney
Black stainless steel chimney
110V or 220V available

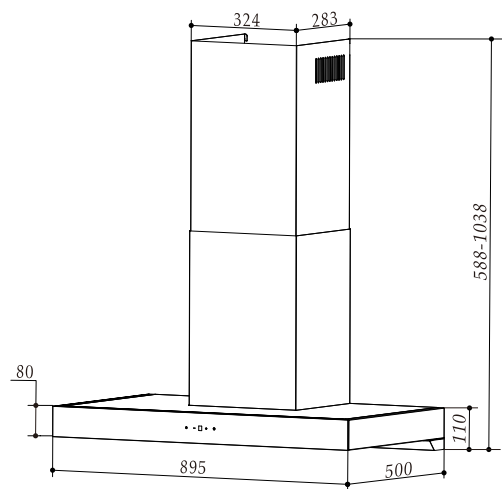

T SHAPE HOOD



TT19



► Features


Size	75/90 cm (36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminium grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m plastic exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm	745x346x500	790x385x545	140/348 pcs
90 cm 36 in	895x346x500	940x385x545	140/328 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2" Chimney
110V or 220V Available

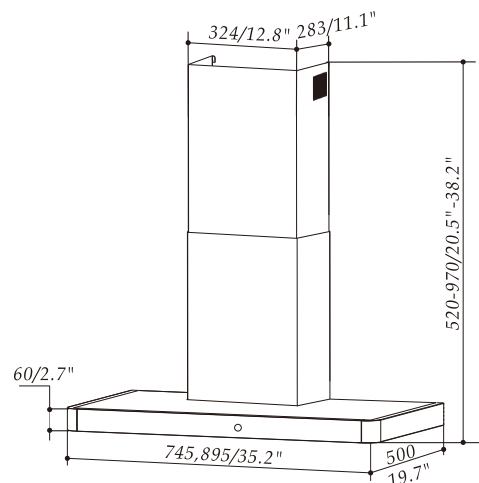

TT20



► Features


Size	90 cm (36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-900m ³ /h (529 CFM) Housing C(1x230W motor)-750m ³ /h (441 CFM)
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	1x12W LED
Filter	3x5-Layer aluminium grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m plastic exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm 36 in	895x366x504	940x430x550	120/312 pcs

► Optional

2xRound charcoal filter
2" Chimney
110V or 220V available
Oil cup

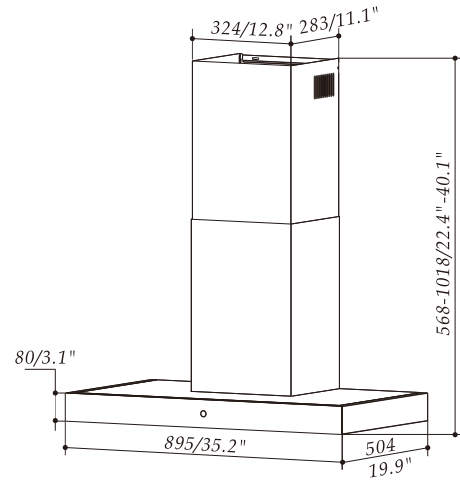

T SHAPE HOOD



TT21



► Features


Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing H(1x230W motor)-900m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	2x3-Layer aluminum grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	898x452x335	940x430x550	120/312 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2" Chimney
110V or 220V Available

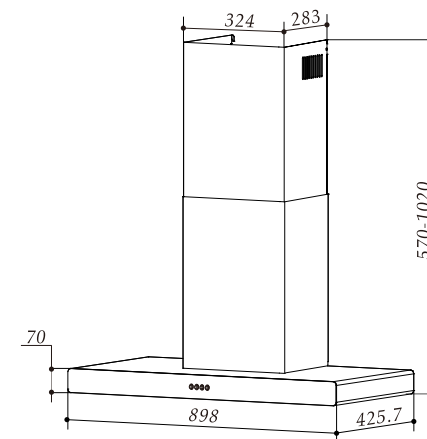

TT22




► Features

Size	75/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R4(1x110W motor)-600m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	1x3.5W LED
Filter	2x1-Layer aluminum grease filter
Chimney cover	465/565/665 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	899x305x630	940x405x745	102/210 pcs

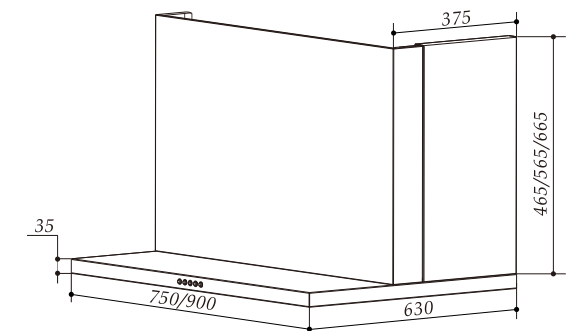

T SHAPE HOOD



TT24



► Features


Size	90 cm (36 in)
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3 x5-Layer aluminum grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm 36 in	898x356x500	940x430x550	120/312 pcs

► Optional

2xRound charcoal filter
Touch switch /Electronic switch
Baffler filter
2" Chimney
110V or 220V Available

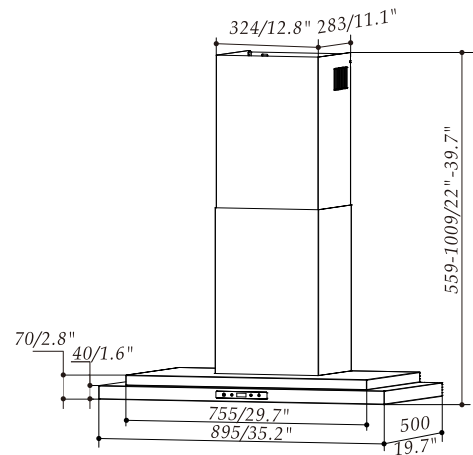

TT25



► Features


Size	60/75/90 cm
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h Housing S(1x165W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	3 x5-Layer aluminum grease filter
Chimney cover	1x500 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x346x500	940x385x545	140/328 pcs

► Optional

2xRound charcoal filter
2" Chimney
110V or 220V Available

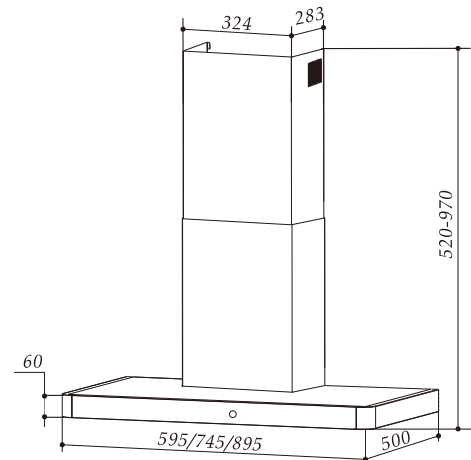

T SHAPE HOOD



TT26

► Features


Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R(1x160W motor)-1000m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2xBaffler filters
Chimney cover	1x450 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x542x455	645x560x505	144/360 pcs
90 cm	895x542x455	945x560x505	96/240 pcs


► Optional

3-Speed touch switch
2" Chimney
Black stainless steel chimney
110V or 220V Available
(R3) 28# stack thickness motor (900m³/h)

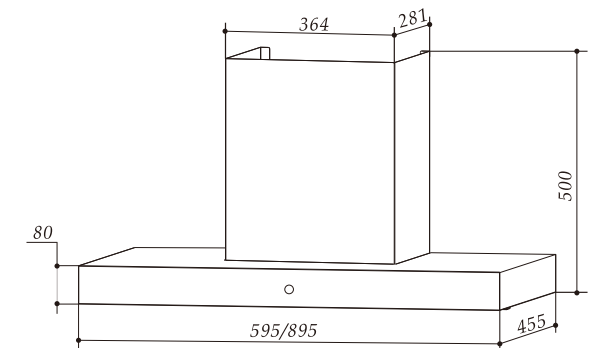

TV Series

THE NEW VERTICAL HOOD SERIES AIMING AT SIMPLE DESIGN,
EASY OPERATING AND COMPETITIVE PRICING. WE HAVE MORE
THAN 15 DIFFERENT DESIGN OF THIS SERIES.
THE ENERGY LEVEL CAN REACH TO A+++.

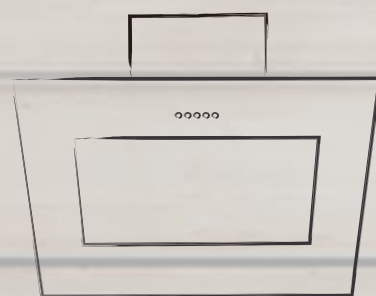



 TV VERTICAL
RANGE HOOD SERIES

The new vertical hood series aiming at simple design,
easy operating and competitive pricing. We have more than 15 different design of this series.
The energy level can reach to A+++.



VERTICAL HOOD



TV13



► Features


Size	50/60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x370x385	620x425x485	180/505 pcs
60 cm	595x370x385	620x425x485	180/505 pcs
90 cm	895x370x385	950x425x485	144/325 pcs

► Optional

- 2xRound charcoal filter
- Baffler filter
- 2nd Chimney
- 110V or 220V available
- Oil Cup

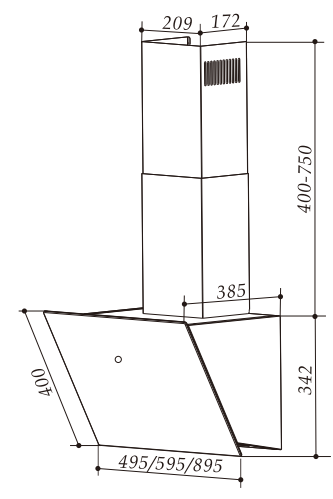

TV13A



► Features


Size	50/60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x370x385	620x425x485	180/465pcs
60 cm	595x370x385	620x425x485	180/505 pcs
90 cm	895x370x385	920x425x485	120/250 pcs

► Optional

- 2xRound charcoal filter
- Baffler filter
- 2nd Chimney
- 110V or 220V available
- Oil Cup

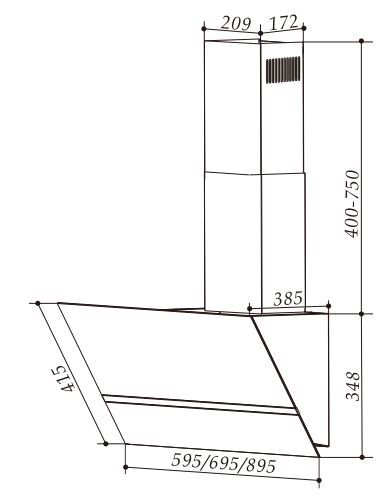

VERTICAL HOOD



TV13B



► Features


Size	50/60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x370x385	620x425x485	180/505 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

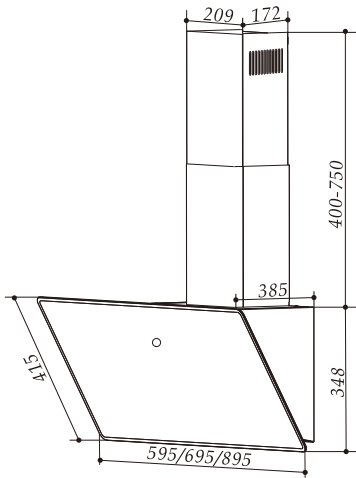

TV13C



► Features


Size	50/60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x370x385	620x425x485	180/505 pcs
60 cm	595x370x385	620x425x485	180/505 pcs
90 cm	895x370x385	950x425x485	144/325 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

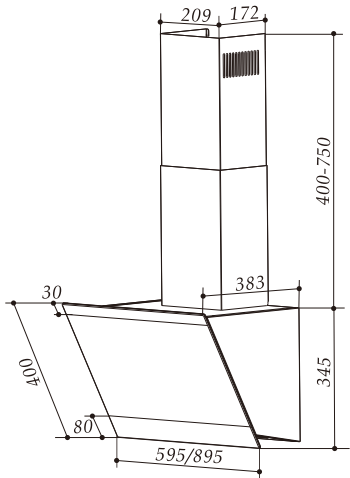

VERTICAL HOOD



TV14



► Features


Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x370x310	565x405x460	250/500 pcs
60 cm	595x370x310	650x405x460	215/440 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

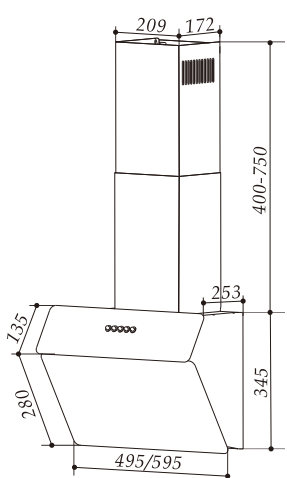

TV16



► Features


Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x495x331	650x550x390	223/451 pcs
90 cm	895x495x331	950x550x390	144/305 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

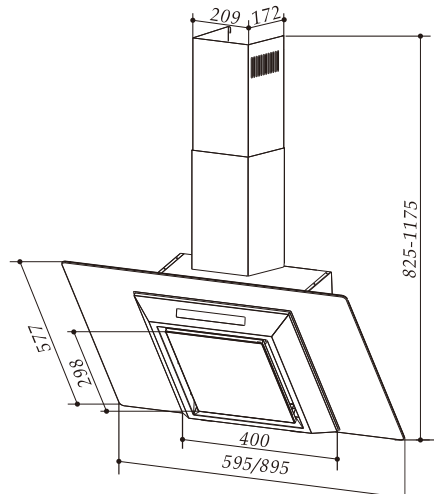

VERTICAL HOOD



TV17



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing C(1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x485x465	650x540x518	143/355 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

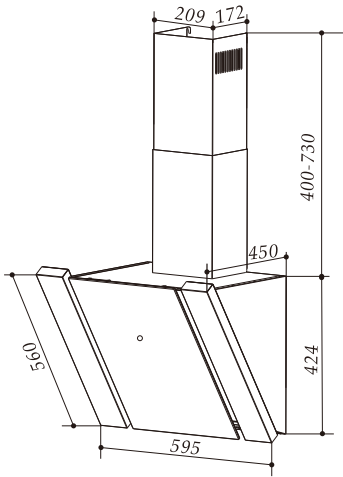

TV18



► Features


Size	60/90 cm Auto Open/Close
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing C(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x487x420	650x590x570	108/240 pcs
90 cm	895x487x420	970x590x570	80/176 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

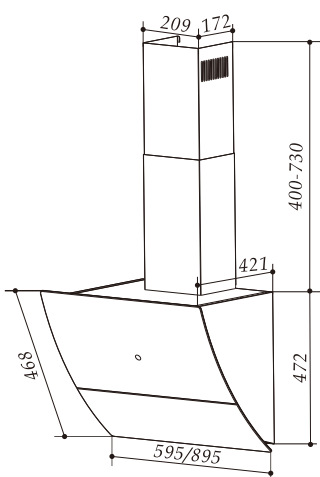

VERTICAL HOOD



TV19



► Features


Size	60/90 cm Auto Open/Close
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x466x425	645x515x540	156/288 pcs
90 cm	895x466x425	945x515x540	108/192 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

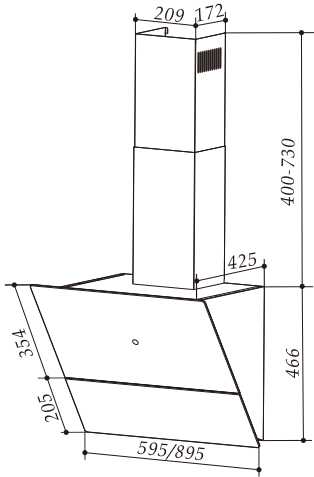

TV20



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing S(1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x393x360	640x450x500	180/450 pcs
70 cm	695x393x360	740x450x500	195/390 pcs
80 cm	795x393x360	940x450x500	120/300 pcs
90 cm	895x393x360	940x450x500	120/300 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

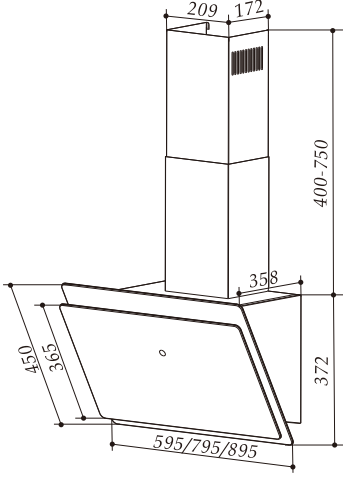

VERTICAL HOOD



TV20B



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x400x369	620x450x485	180/465 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

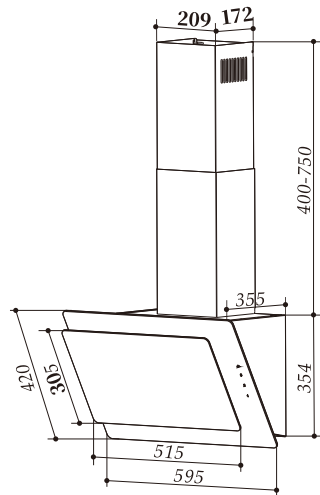

TV22



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x400x369	620x450x485	180/465 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

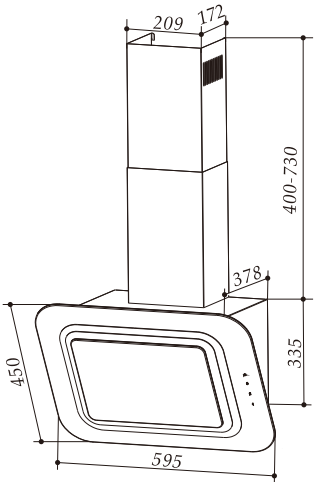

VERTICAL HOOD



TV23



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x369x373	620x450x485	180/375 pcs
60 cm	595x369x373	620x450x485	180/485 pcs

► Optional

2xRound charcoal filter
Baffler filter
3-Speed touch switch
2nd Chimney
110V or 220V available
Oil Cup

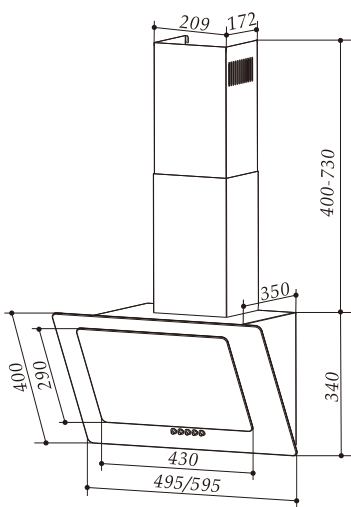

TV25



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x410x420	570x470x485	160/400 pcs

► Optional

2xRound charcoal filter
Baffler filter
3-Speed touch switch
2nd Chimney
110V or 220V available
Oil Cup

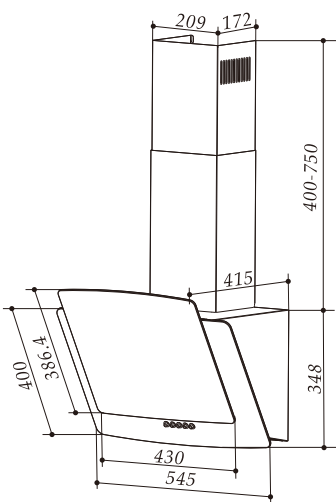

VERTICAL HOOD



TV26



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x378x357	620x420x440	225/555 pcs
60 cm	595x378x357	620x420x440	225/555 pcs

► Optional

2xRound charcoal filter
Baffler filter
3-Speed touch switch
2nd Chimney
110V or 220V available

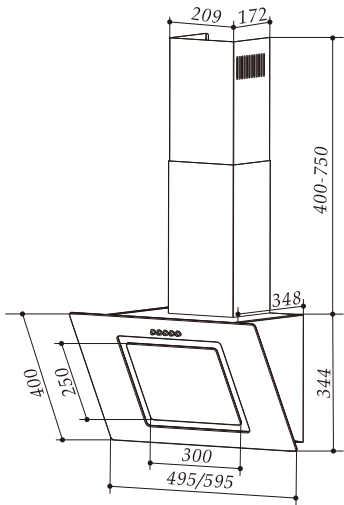

TV27



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x305x282	620x370x430	270/636 pcs
60 cm	595x305x282	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
Baffler filter
3-Speed touch switch
2nd Chimney
110V or 220V available

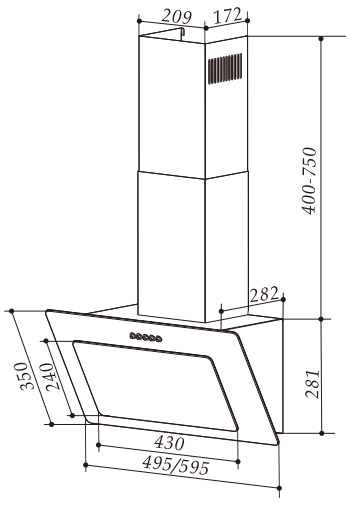

VERTICAL HOOD



TV27A



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x297x282	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

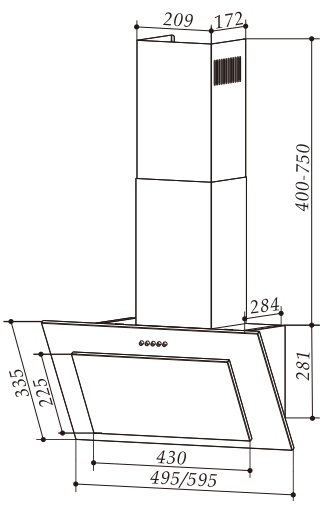

TV27B



► Features

Size	50/60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x297x282	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

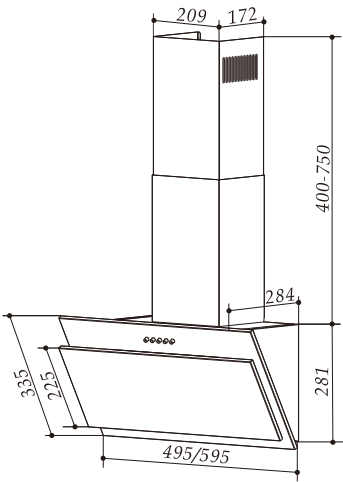

VERTICAL HOOD



TV28



► Features



Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x295x322	620x370x430	270/636 pcs
60 cm	595x295x322	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
Baffler filter
3-Speed touch switch
2nd Chimney
110V or 220V available
Oil Cup

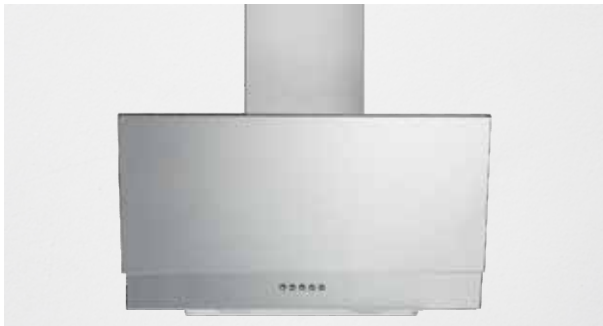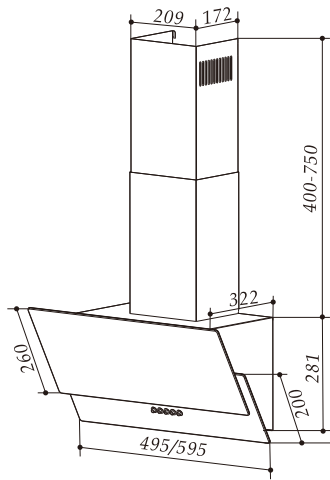

TV28A



► Features


Size	60/70/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x296x313	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

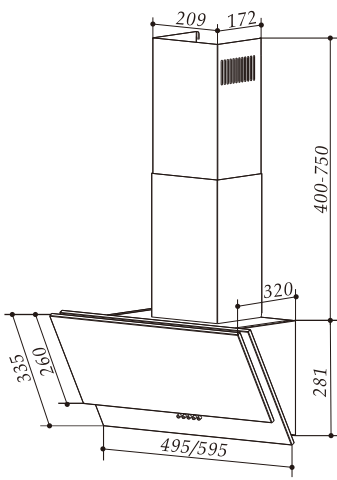

VERTICAL HOOD



TV28B



► Features


Size	50/60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x314x311	620x390x460	270/567 pcs

► Optional

2xRound charcoal filter
Baffler filter
3-Speed touch switch
2nd Chimney
110V or 220V available

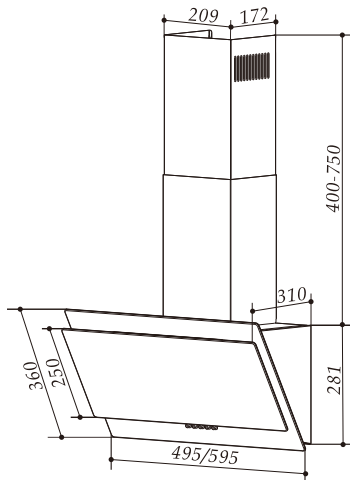

TV28C



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x294x317	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

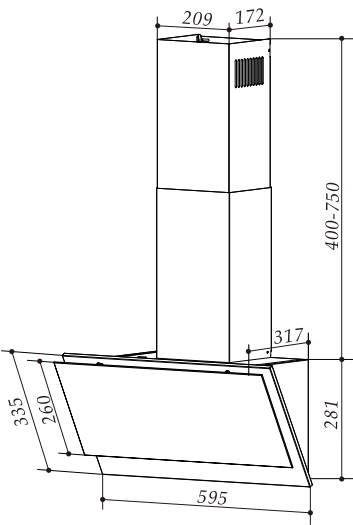

VERTICAL HOOD



TV28D



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x294x317	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

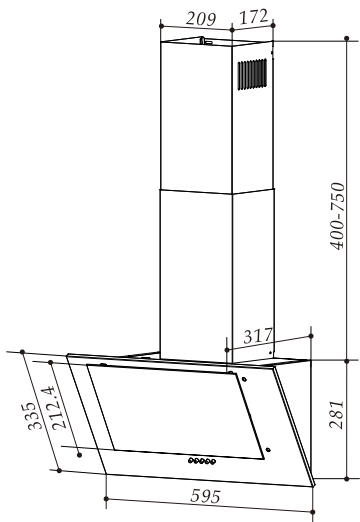

TV36



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing M (1x130W motor)-550m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x390x375	615x455x465	180/465 pcs
90 cm	895x390x375	915x455x465	120/310 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

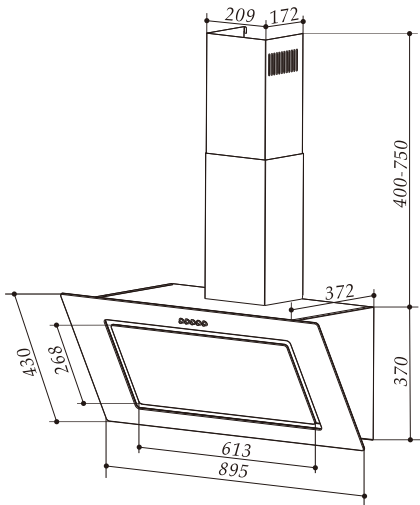

TV40



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x305x324	620x370x430	270/636 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

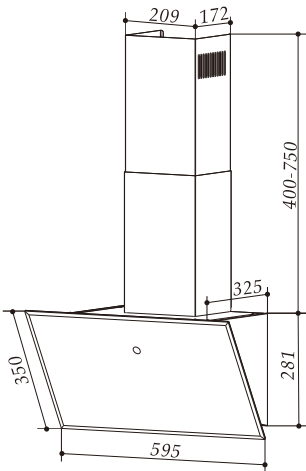

VERTICAL HOOD



TV40B



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x306x329	515x360x430	330/792 pcs
60 cm	595x306x329	615x360x430	270/666 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

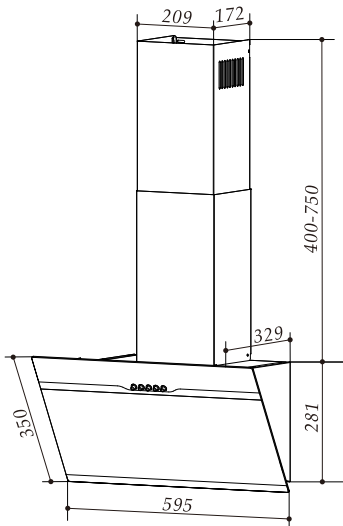

VERTICAL HOOD



TV40C



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495×306×329	515×360×430	330/792 pcs
60 cm	595×306×329	615×360×430	270/666 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

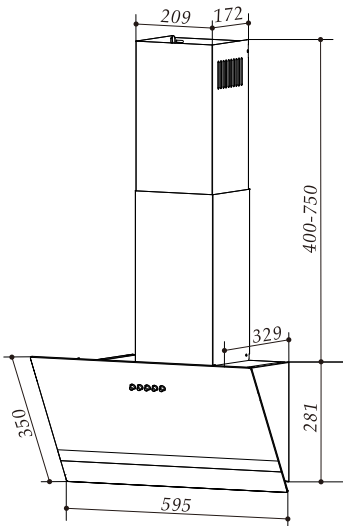

TV40D



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495×306×329	515×360×430	330/792 pcs
60 cm	595×306×329	615×360×430	270/666 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

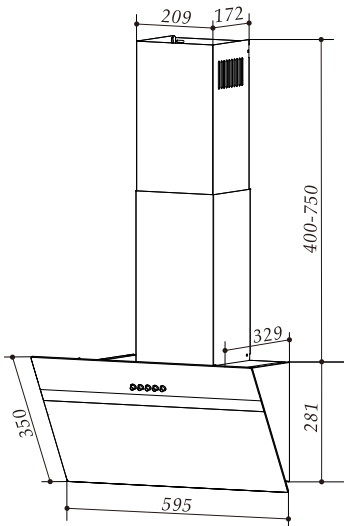

VERTICAL HOOD



TV40E



► Features

Size	45/50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
45 cm	445×306×329	515×360×430	330/792 pcs
50 cm	495×306×329	515×360×430	330/792 pcs
60 cm	595×306×329	615×360×430	270/666 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

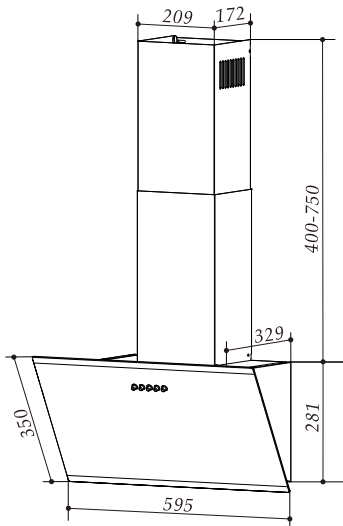

TV40F



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
45 cm	445×306×329	515×360×430	330/792 pcs
50 cm	495×306×329	515×360×430	330/792 pcs
60 cm	595×306×329	615×360×430	270/666 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

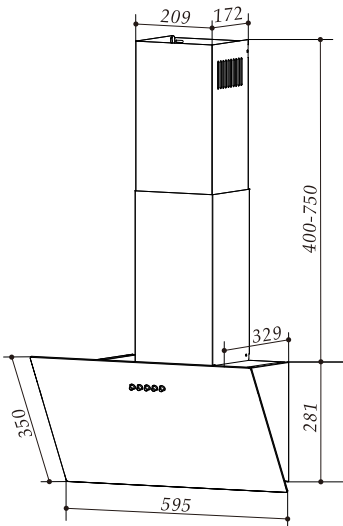

VERTICAL HOOD



TV41



► Features


Size	60 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x415x262	620x325x490	252/665 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

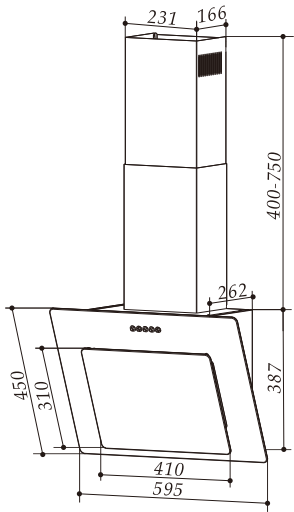

TV42



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x300x401	620x365x515	216/570 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

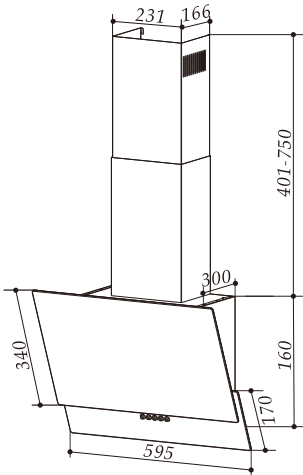

VERTICAL HOOD



TV42B



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x300x401	620x365x515	216/570 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

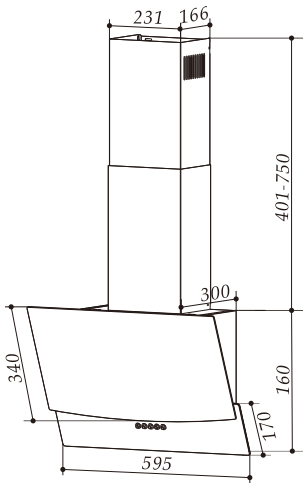

TV42C



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed eletronic switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With Φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x298x403	620x365x515	216/570 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

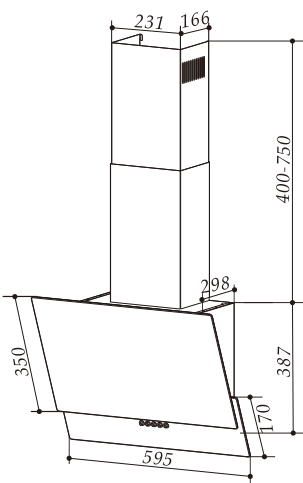

VERTICAL HOOD



TV42E



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x292x392	620x365x515	216/570 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

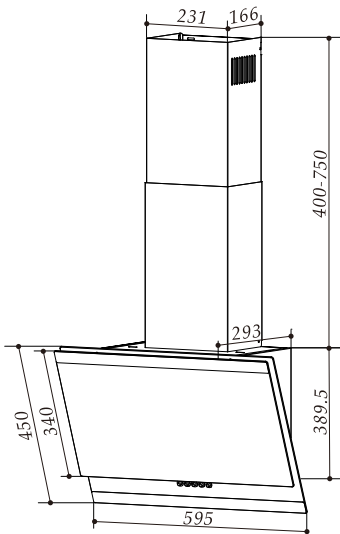

TV42F



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x296x392	620x365x515	216/570 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

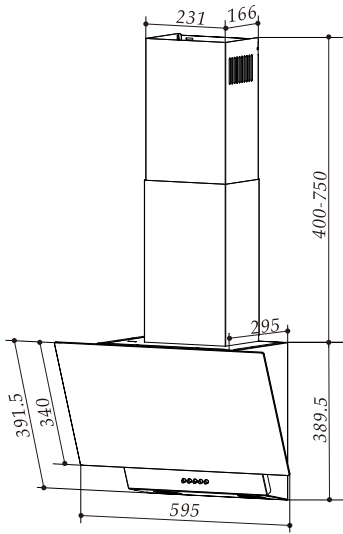

VERTICAL HOOD



TV45



► Features

Size	60/80/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing M (1x130W motor)-550m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x370x370	615x450x505	180/465 pcs
80 cm	795x370x370	915x450x505	120/310 pcs
90 cm	895x370x370	915x450x505	120/310 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

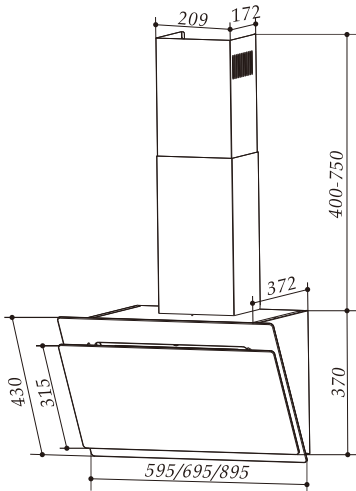

TV47



► Features

Size	60 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270x1x300 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x360x294	620x415x410	225/540 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

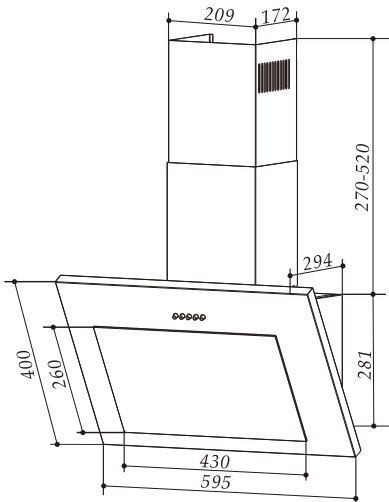

VERTICAL HOOD



TV47B



► Features

Size	60 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270x1x300 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x297x349	620x415x410	225/540 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

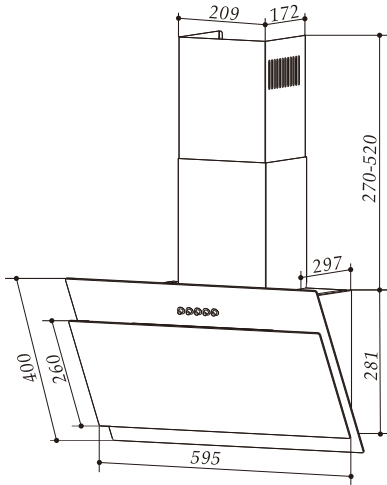

TV47C



► Features

Size	60 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270x1x300 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x294x360	620x415x410	225/540 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

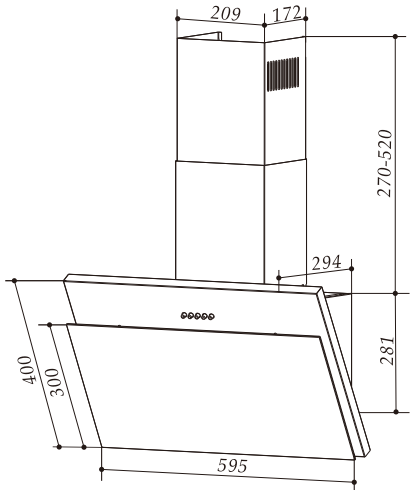

VERTICAL HOOD



TV47F



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270x1x300 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x295x360	520x415x410	275/660 pcs
60 cm	595x295x360	620x415x410	225/540 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

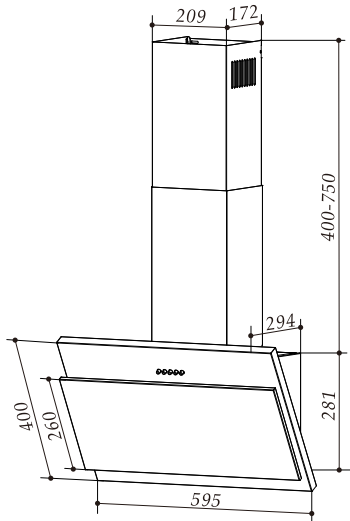

TV47G



► Features

Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270x1x300 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	495x295x360	520x415x410	275/660 pcs
60 cm	595x295x360	620x415x410	225/540 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

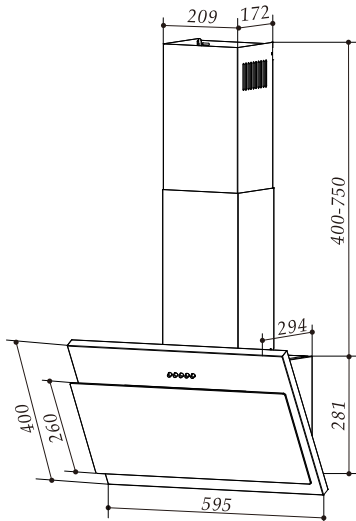

VERTICAL HOOD



TV47H



► Features


Size	50/60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270°x1x300 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20°GP/40°HQ)
50 cm	495x298x347	520°x415°x410	275/660 pcs
60 cm	595x298x347	620°x415°x410	225/540 pcs

► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

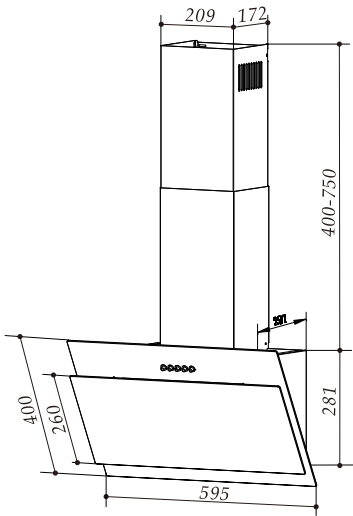

TV48



► Features


Size	60 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x270°x1x300 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20°GP/40°HQ)
60 cm	595x360x294	620°x415°x410	225/540 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

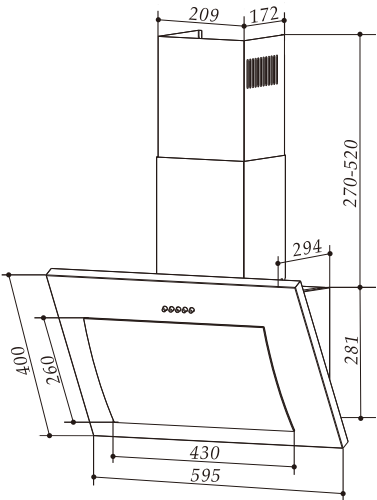

VERTICAL HOOD



TV49



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20°GP/40°HQ)
50 cm	495x365x375	620°x415°x485	180/465 pcs
60 cm	595x364x375	620°x415°x485	180/462 pcs
90 cm	895x364x375	920°x415°x485	120/310 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

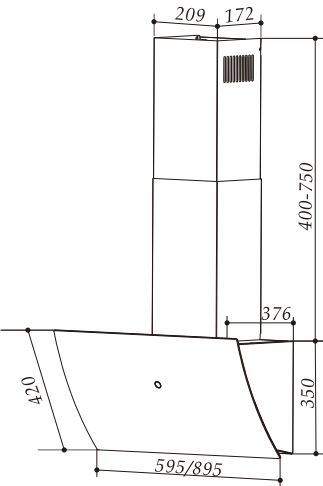

TV52



► Features


Size	50/60/90 cm
Material	Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm
With φ 150mm outlet dimension and 2m aluminum exhaust pipe	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20°GP/40°HQ)
50 cm	495x370x385	620°x425°x485	180/465 pcs
60 cm	595x370x385	620°x425°x485	180/505 pcs
90 cm	895x370x385	920°x425°x485	120/250 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

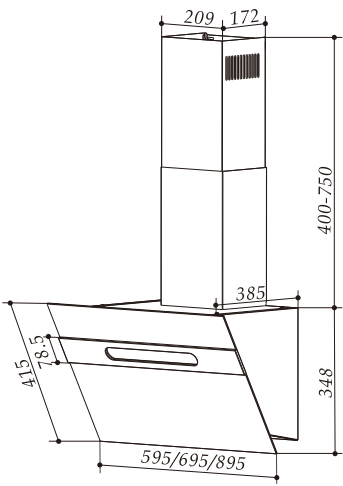

VERTICAL HOOD



TV52A



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m³/h Housing S (1x65W motor)-350m³/h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x370x385	620x425x485	180/505 pcs
90 cm	895x360x385	915x415x440	150/370 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

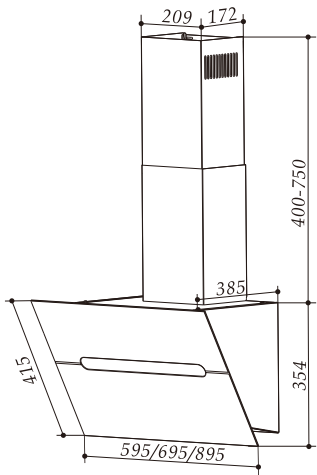

TV53



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x334x395	620x395x515	233/538 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

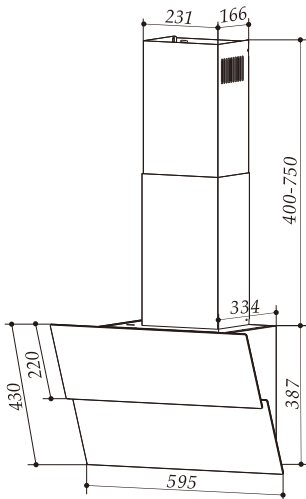

TV54



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x323x405	620x395x515	242/563 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

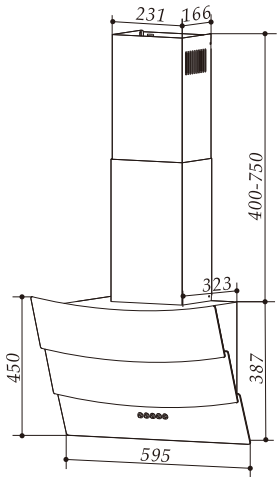

VERTICAL HOOD



TV55



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing S (1x65W motor)-350m³/h Housing P (1x160W motor)-400m³/h
Noise level	≤60 dB
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	1x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x336x387	620x395x515	233/538 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

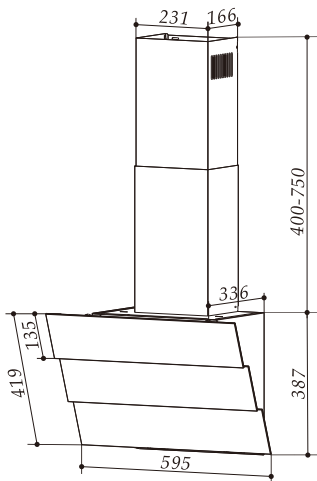

VERTICAL HOOD



TV59



► Features

Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing R(1x160W motor)-1000m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	1x3W LED
Filter	1x1 -Layer aluminum grease filter
Chimney cover	1x500 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x338x488	650x395x530	204/492 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available
Oil Cup

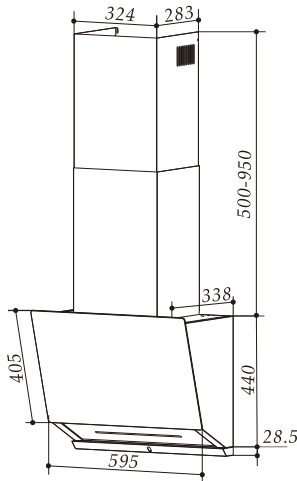

TV61



► Features

Size	60/90 cm
Material	Inox 430 SS body/Cold rolled plate
Housing	Metal
Impeller	Metal
Airflow	Housing R(1x160W motor)-1000m ³ /h
Noise level	≤ 60 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1xBaffler filter
Chimney cover	1x400 mm

With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe


► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x360x430	640x415x485	192/465 pcs

90 cm	895x360x430	940x315x485	128/310 pcs
-------	-------------	-------------	-------------



► Optional

2xRound charcoal filter
2nd Chimney
110V or 220V available

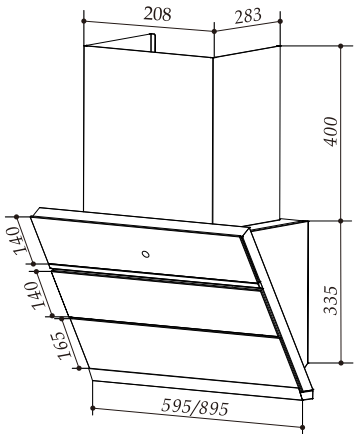

TL Series

THE PILLAR DESIGN OF RANGE HOOD,
THE FINE VINTAGE DESIGN BRINGS OLD FASHION BACK TO YOUR KITCHEN,
WITH COLORFUL LOOKING OF RANGE HOOD,
WE CAN ALSO HAVE A MODERN FEELING OF YOUR KITCHEN.

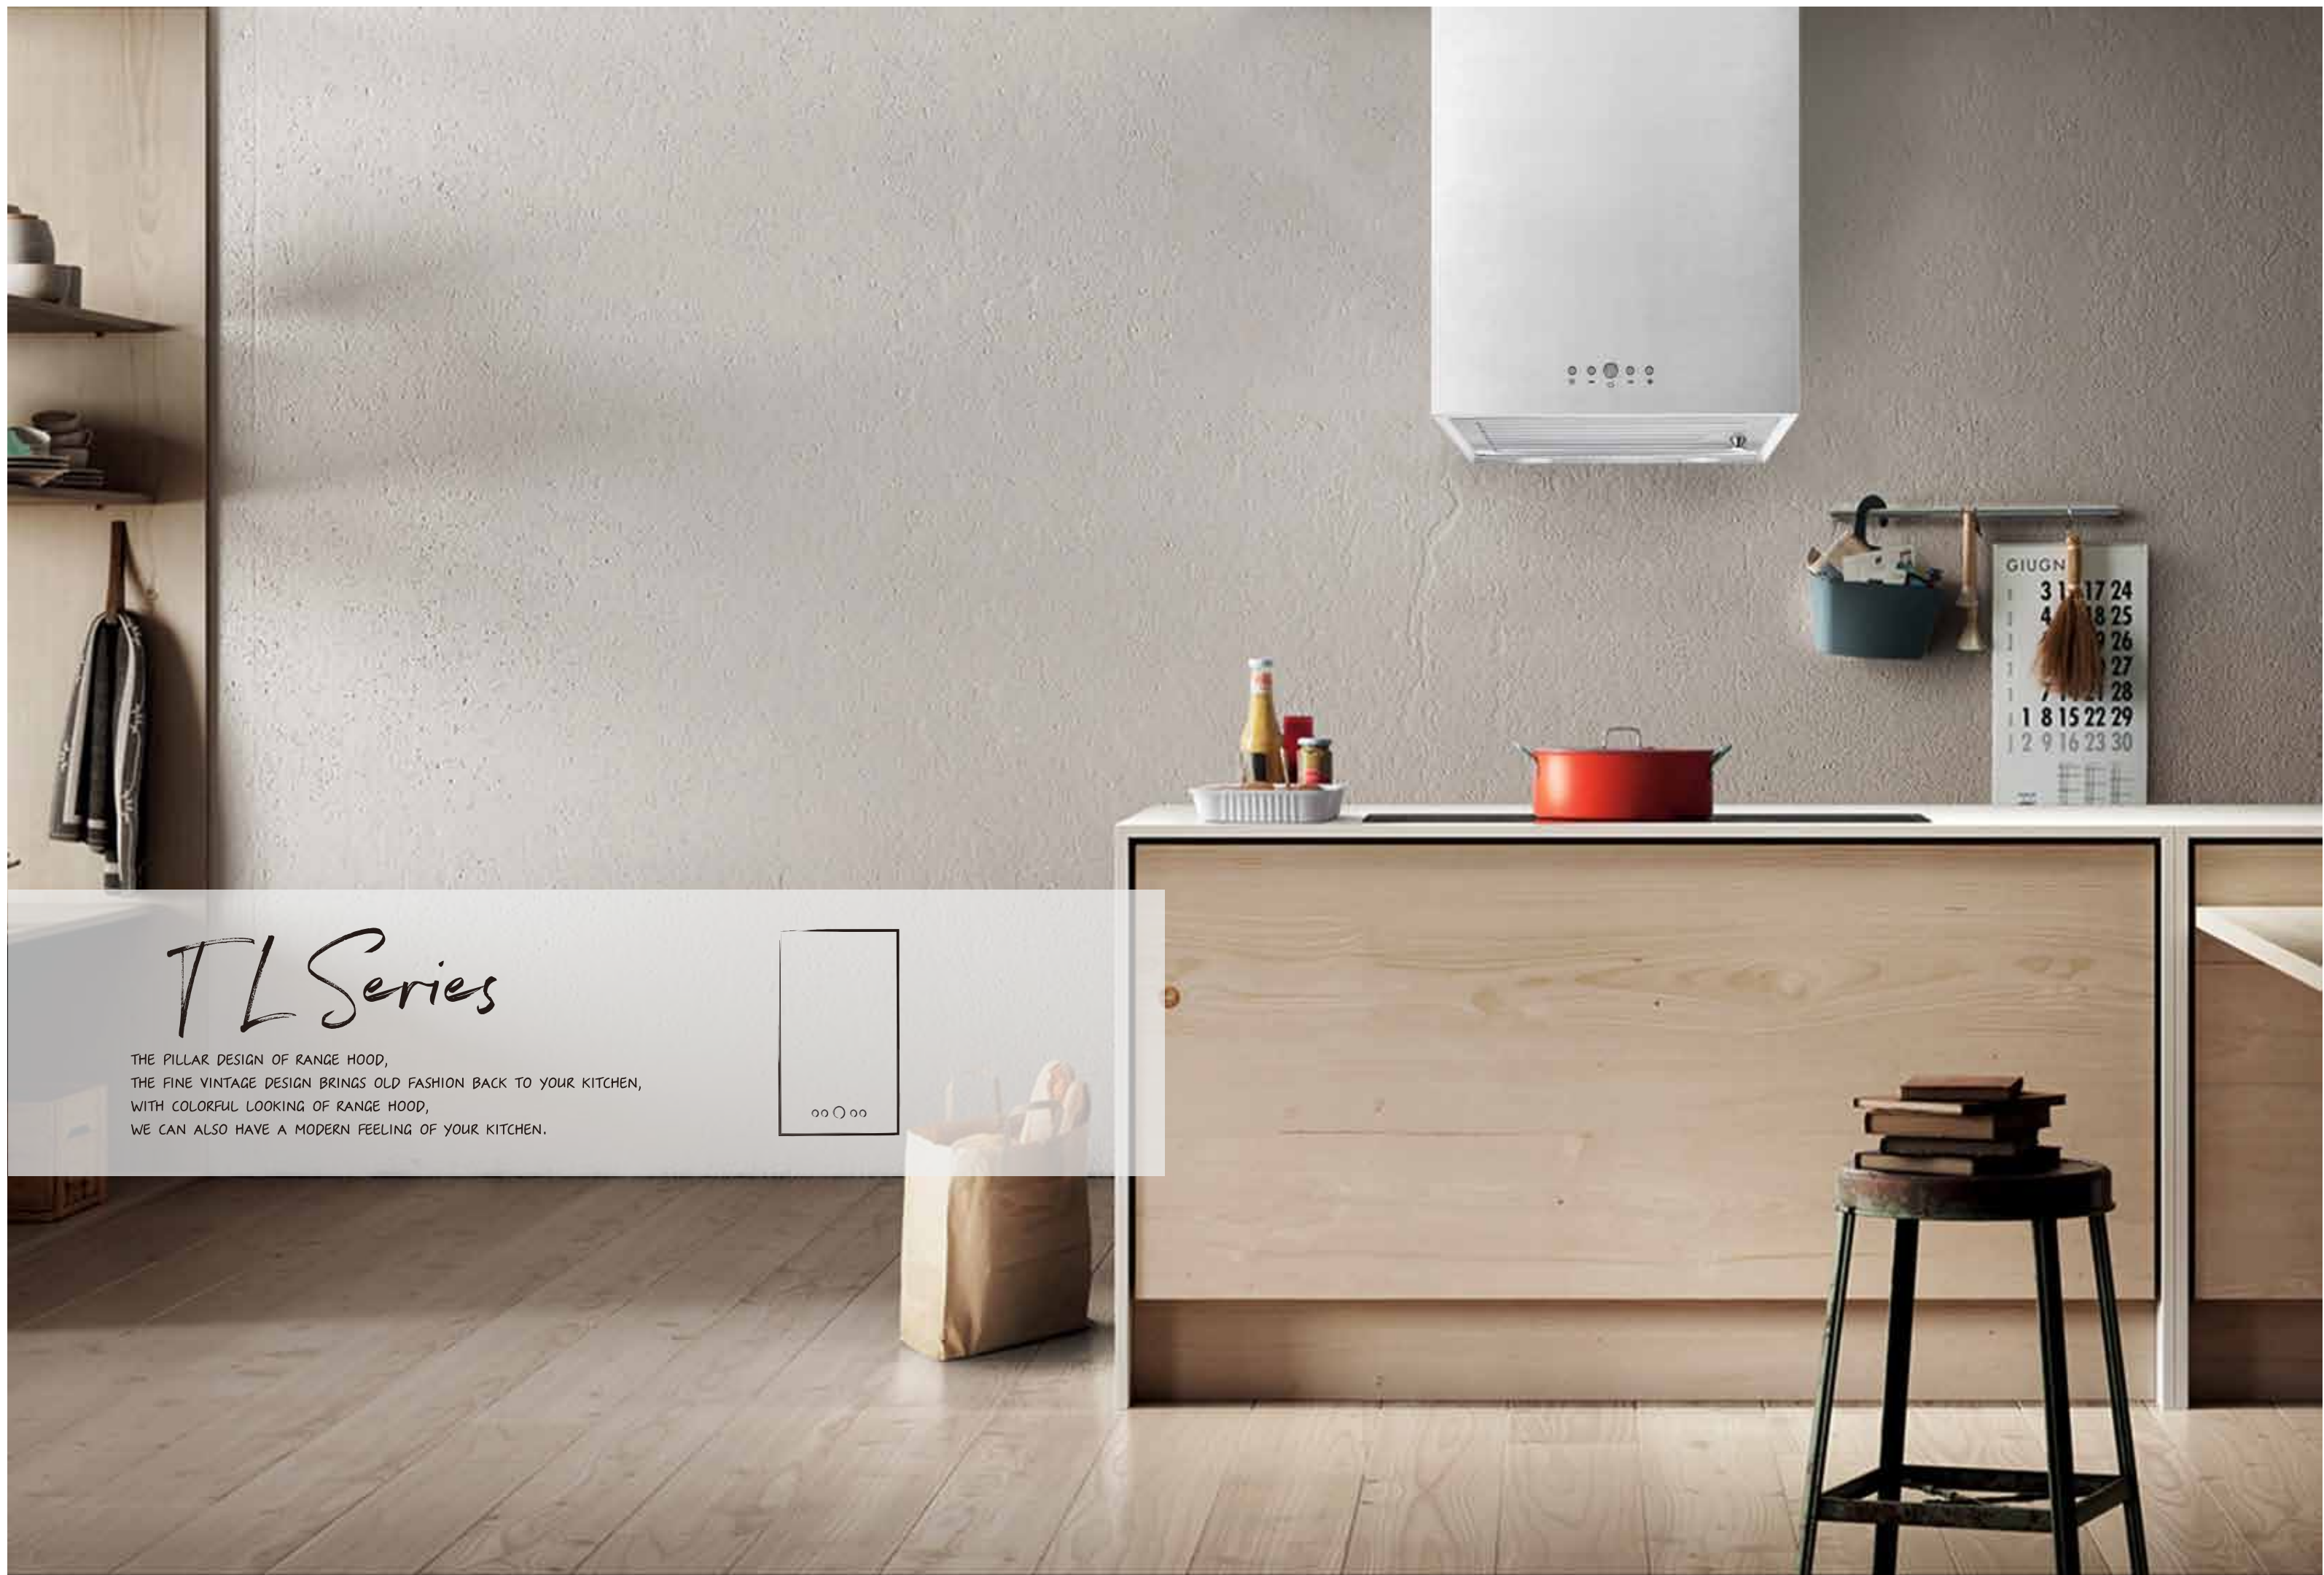



TL PILLAR

RANGE HOOD SERIES

The pillar design of range hood,
the fine vintage design brings old fashion back to your kitchen,
with colorful looking of range hood,
we can also have a modern feeling of your kitchen.



Aluminum filter



We have our own special design for the baffle filter,
which is easily taking out to wash and anti sudden
dropping.TL series can also use 5 layers aluminum
filter, and standard feature is only to use one filter.



All telescopic designs use 3 layersaluminum filter as
standard features. Our aluminum filters are special
designed to gain a much strongerstructure. All the
plate we used forthe body are min 0.6mm material,
all the edges all strictly controlled, we have been
trying our best to make the whole product to have
perfect finishing and quality.

PILLAR HOOD



TL01



► Features


Size	40 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h Housing S (1x65W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
40 cm	400x370x830	905x475x455	120/255 pcs

► Optional

2xRound charcoal filter
Baffler filter
Aluminum or plastic exhaust pipe
2nd Chimney
110V or 220V available

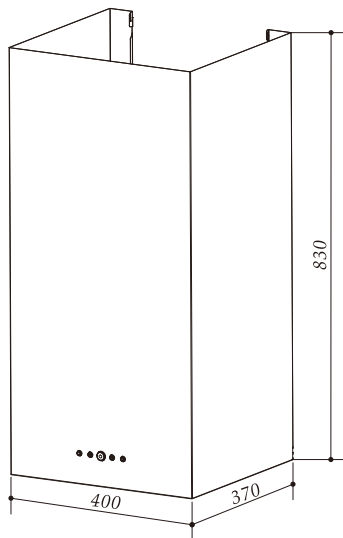

TL02



► Features


Size	90 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing C (1x230W motor)-750m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x470x830	500x505x930	92/232 pcs

► Optional

2xRound charcoal filter
Baffler filter
Aluminum or plastic exhaust pipe
2nd Chimney
110V or 220V available

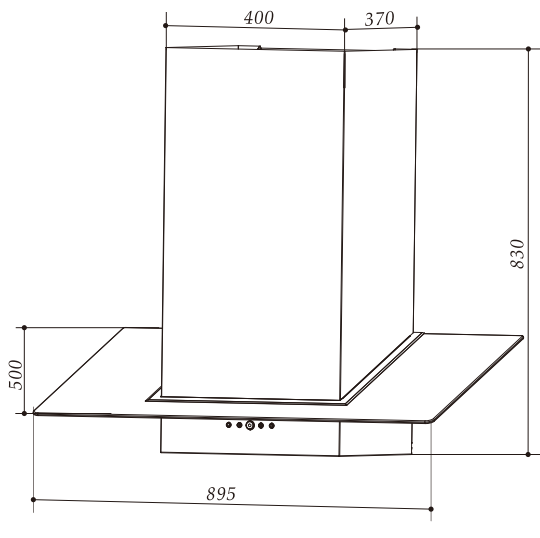

PILLAR HOOD



TL04



► Features


Size	60 cm
Material	Cold rolled plate
Airflow	Housing S (1x65W motor)-350m ³ /h
Noise level	≤50 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x3-Layer aluminum grease filter
With φ 150mm outlet dimension	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	598x334x700	650x380x760	144/315 pcs

► Optional

3-Speed push button
2xRound charcoal filter
Aluminum or plastic exhaust pipe

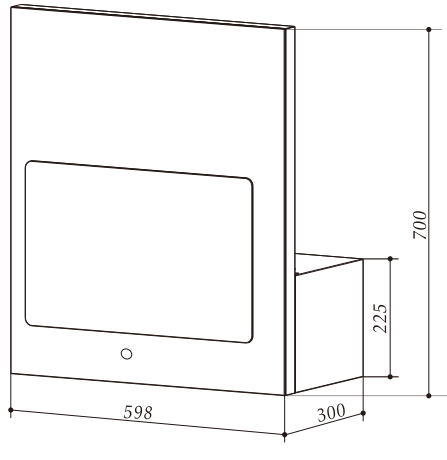

TL05



► Features


Size	60 cm
Material	Inox 430 SS body/Cold rolled plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h Housing S (1x165W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	1x1.5W LED
Filter	2x5-Layer aluminum grease filter

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	598x306x700	650x360x760	153/345 pcs

► Optional

2xRound charcoal filter
Baffler filter
Aluminum or plastic exhaust pipe
2nd Chimney
110V or 220V available

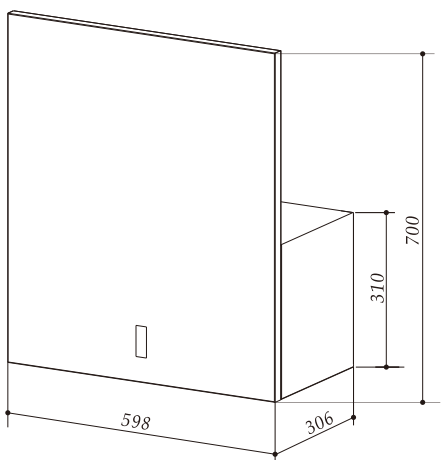

PILLAR HOOD



TL06



► Features

Size	60/90 cm
Material	Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x165W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x2W Square Lamp
Filter	2x3-Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x300x320	620x345x520	259/605 pcs
90 cm	895x300x320	920x345x520	173/412 pcs

► Optional

2xRound charcoal filter
Baffler filter
Aluminum or plastic exhaust pipe
2nd Chimney
110V or 220V available

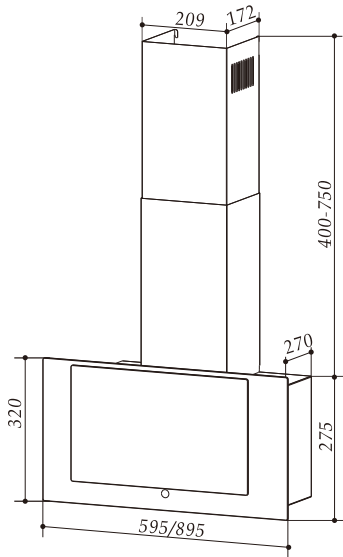

TL07



► Features

Size	60/90 cm
Material	Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x165W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	2x2W Square Lamp
Filter	1x3 -Layer aluminum grease filter
Chimney cover	1x400 mm


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	595x277x320	620x325x520	280/649 pcs
60 cm	895x277x320	920x325x520	189/438 pcs

► Optional

2xRound charcoal filter
Baffler filter
2nd Chimney
110V or 220V available

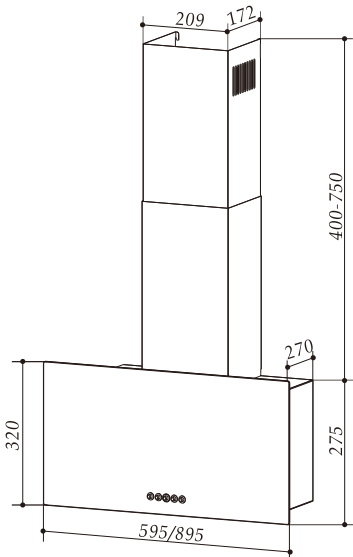

PILLAR HOOD



TL08


► Features

Size	60 cm
Material	Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x165W motor)-350m ³ /h

Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	1x1.5W LED
Filter	2x5-Layer aluminum grease filter

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	598x306x700	650x360x760	153/345 pcs

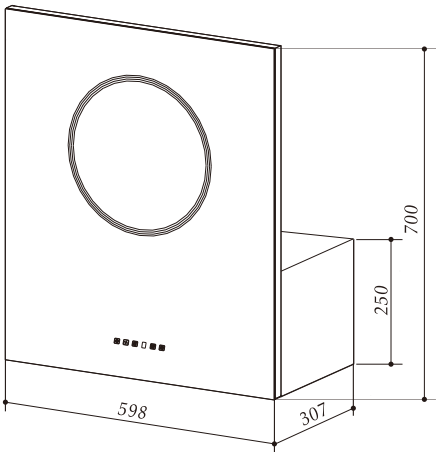

PILLAR HOOD



PILLAR HOOD




TL09

► Features

Size	35 cm
Material	Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x165W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
35 cm	350x430x930	1000x415x495	108/258 pcs

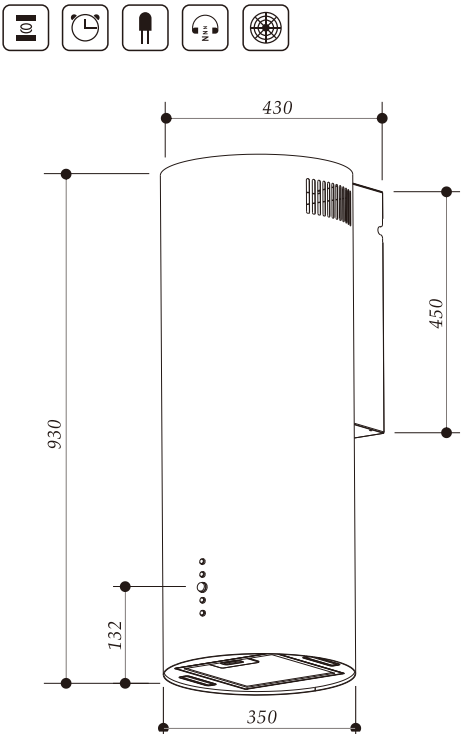


TL10

► Features

Size	60 cm
Material	Cold rolled plate
Airflow	Housing K(1x230W motor)-750m ³ /h Housing M(1x130W motor)-550m ³ /h Housing S(1x165W motor)-350m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	1x2W LED
Filter	2x5-Layer aluminum grease filter

► Packing


	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	598x310x398	650x360x760	153/345 pcs

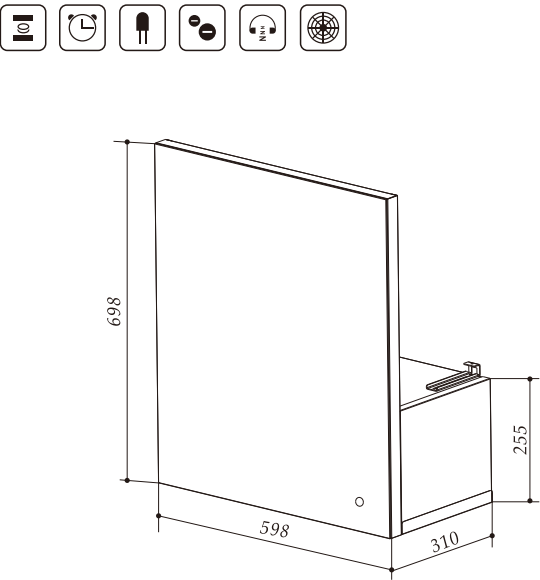



TI Series


THE ISLAND HOOD IS DESIGNED FOR BIG KITCHEN
AND THE ISLAND HOOD ALWAYS FEATURED WITH HIGH SUCTION
AND HIGH-END SWITCH. HANGING ON THE CEILING OF THE
KITCHEN GIVES YOU A LUXURY AND COMFORT

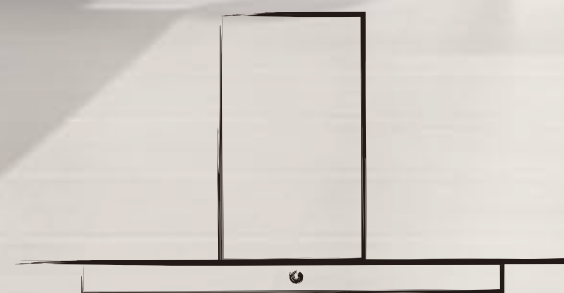



TI ISLAND RANGE HOOD SERIES

The island hood is designed for big kitchen and the island hood always featured with high suction and high-end switch. Hanging on the ceiling of the kitchen gives you a luxury and comfort

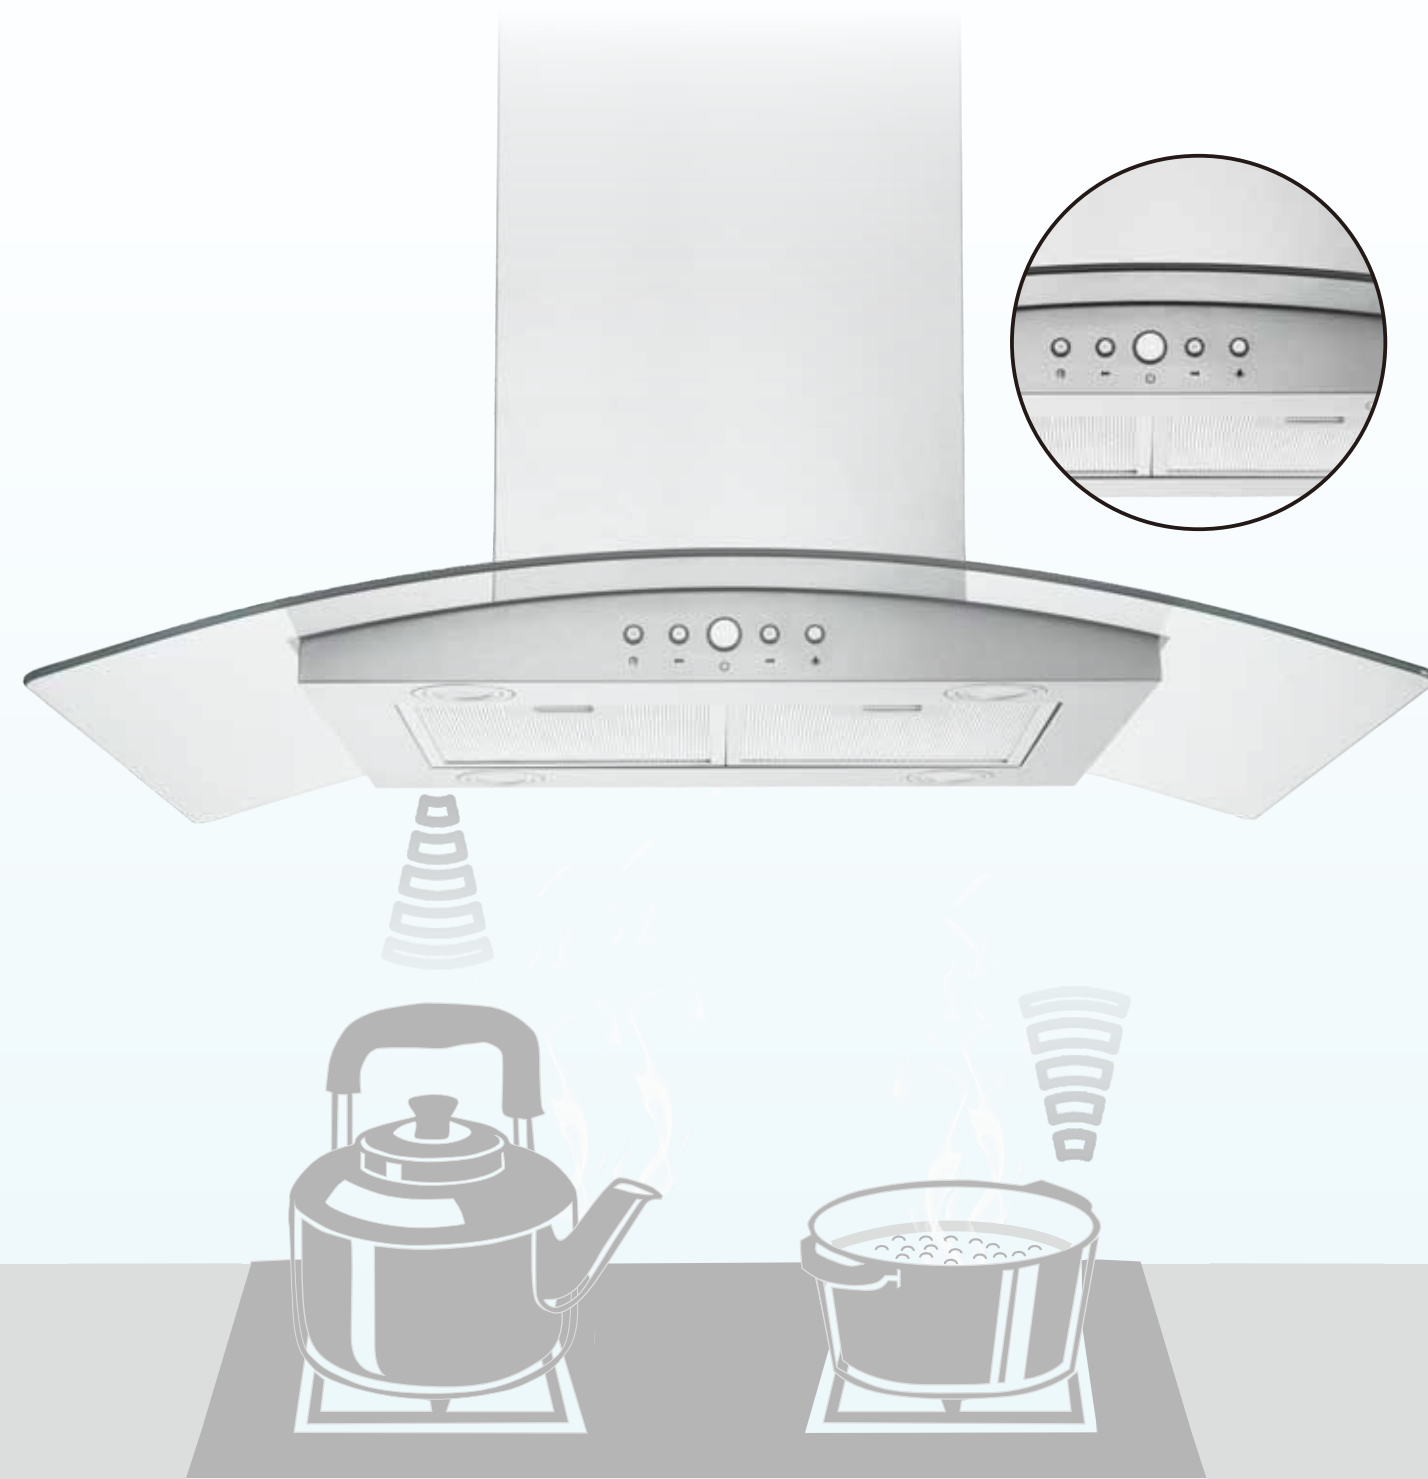

Electronic switch

The light ring on our electric switch has the current popular color of ice blue, the ring uses high transparent material in order to turn the blue light into a warm brightness, which will not have bad influence to the eyes.

The color of the light ring also have options according to customers' requirements. In order to get a better touching feeling, the button uses #304 stainless steel material to lathing out, the perfect surface finishing on the button show our product attitude of meticulousity and chasing perfection. Every and each button had the life test of 1 million times on and off, to make sure 100% qualification of the function.

Our EO2 electric switch with blue light ring, the button is made of true 201#SS gives perfect touch feeling. And the blue light ring surround the button present us prefect looking of the whole switch.

ISLAND HOOD



TI01



► Features

Size	60/90 cm (24/36 in)
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	3x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm 24 in	595x331x600	990x465x660	72/200 pcs
90 cm 36 in	895x331x600	990x465x660	80/215 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

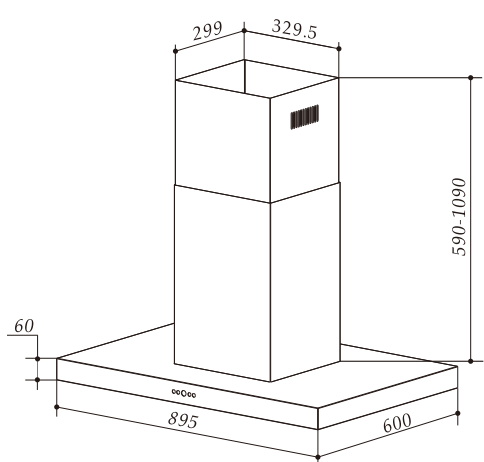

TI02



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold Rolled Plate
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed push button
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x351x600	975x475x660	72/192 pcs
90 cm 36 in	895x351x600	975x475x660	72/192 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

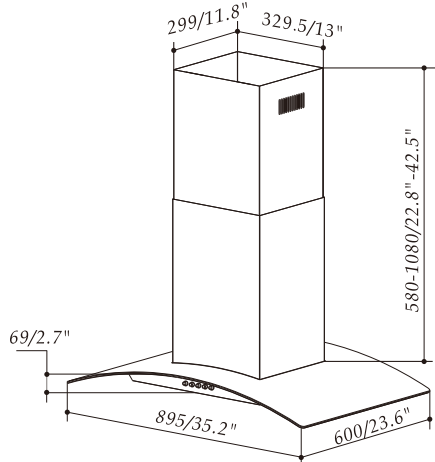

ISLAND HOOD



TI03



► Features

Size	90 cm
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x328x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

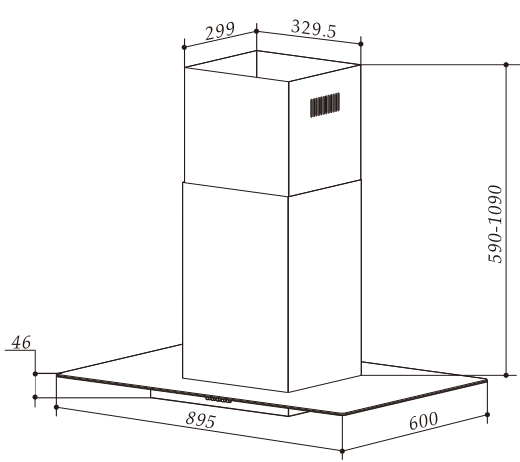

TI07



► Features

Size	90 cm
Material	Inox 430 SS body/Cold Rolled Plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x328x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

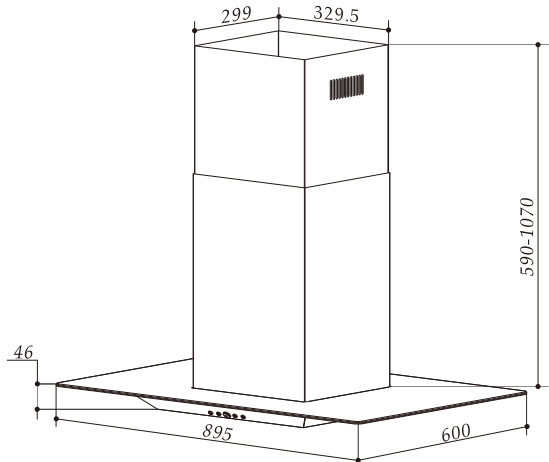

ISLAND HOOD



TI08



► Features

Size	90 cm
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x353x600	975x475x660	72/192 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

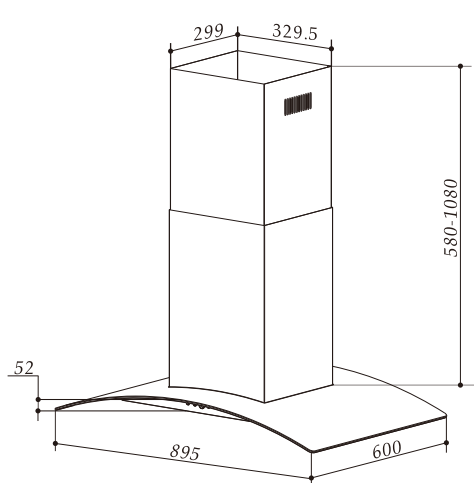

TI09



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(2x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x351x600	975x475x660	72/192 pcs
90 cm 36 in	895x351x600	975x475x660	72/192 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

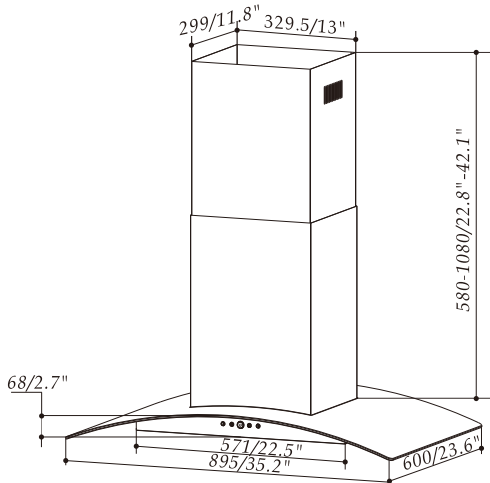

ISLAND HOOD



TI10



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x345x600	990x465x660	72/200 pcs
90 cm 36 in	895x345x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

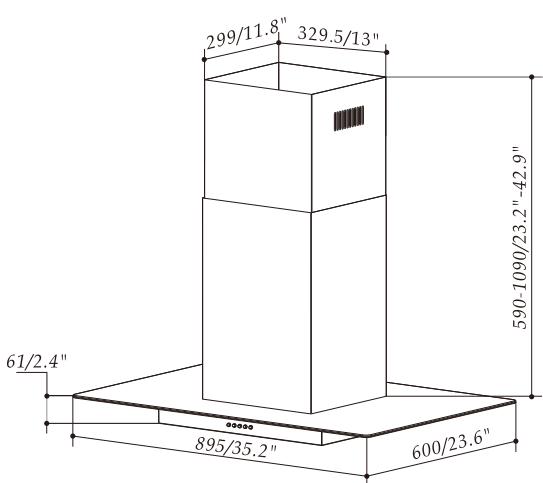

TI11



► Features

Size	90 cm
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	3x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x311x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
3-Speed touch switch
Baffler filter
110V or 220V available

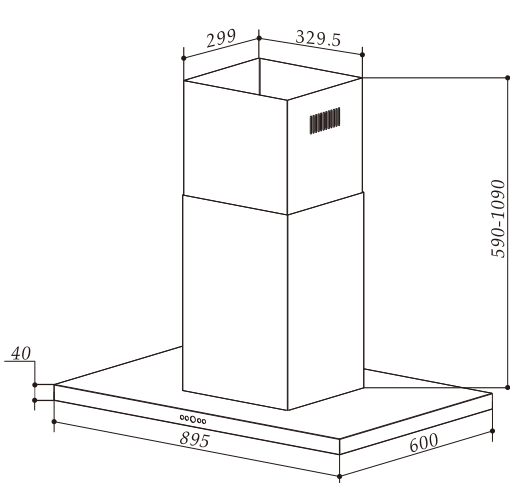

ISLAND HOOD



TI12

PATENT
NUMBER 201630092038 6



► Features

Size	90 cm
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x328x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

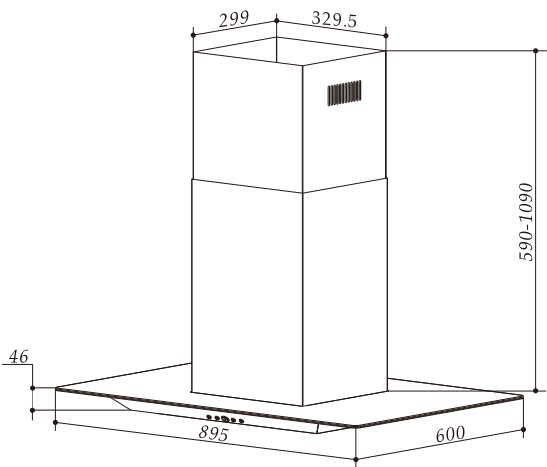

TI13



► Features

Size	90 cm
Material	Inox 430 SS body/Cold Rolled Plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤65 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x358x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

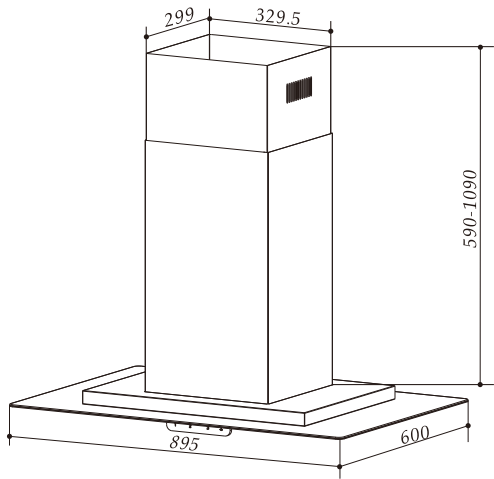

ISLAND HOOD



TI15



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold Rolled Plate
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm 36 in	895x351x600	990x465x660	81/224 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

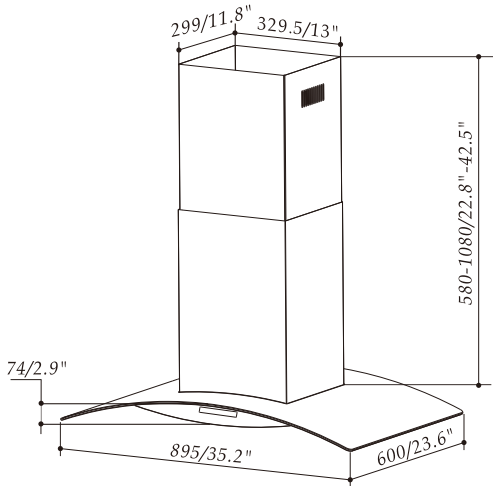

TI16



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	2x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With Φ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x327x600	930x445x660	96/260 pcs
90 cm 36 in	895x327x600	1035x445x660	81/220 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

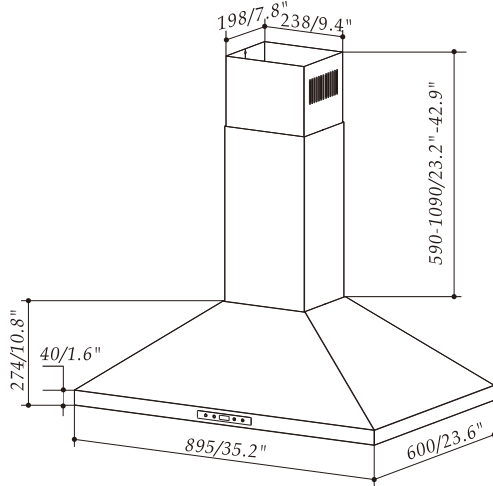

ISLAND HOOD



TI17



► Features

Size	90 cm (36 in)
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	3x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm 30 in	745x327x600	930x445x660	96/260 pcs
90 cm 36 in	895x327x600	1035x445x660	81/220 pcs

► Optional

2xRound charcoal filter
3-Speed electronic switch
Baffler filter
110V or 220V available

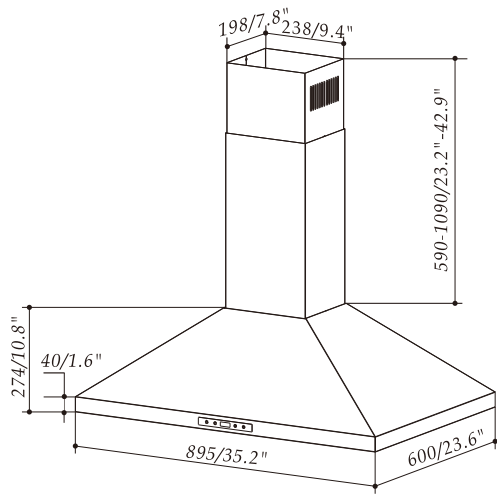

TI18



► Features

Size	90 cm (36 in)
Material	Inox 430 SS body
Airflow	Housing K(1x230W motor)-750m ³ /h (441 CFM) Housing M(1x130W motor)-550m ³ /h (323 CFM)
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	3x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm 36 in	895x347x600	990x465x660	72/200 pcs

► Optional

2xRound charcoal filter
3-Speed electronic switch
Baffler filter
110V or 220V available

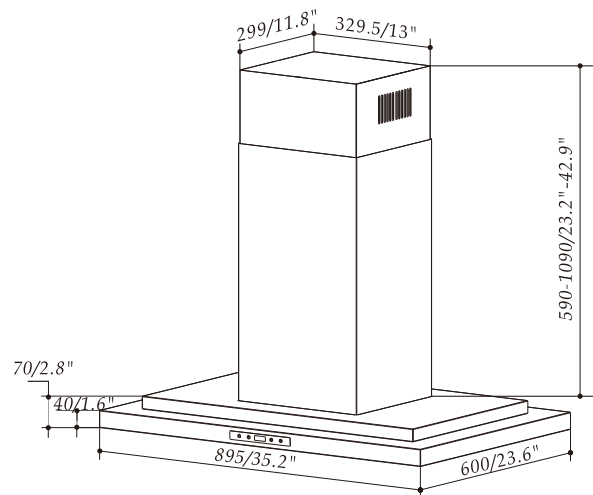

TI19



► Features

Size	75/90 cm (30/36 in)
Material	Inox 430 SS body/Cold Rolled Plate
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	1x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm 36 in	895x351x600	990x465x660	81/224 pcs

► Optional

2xRound charcoal filter
Baffler filter
110V or 220V available

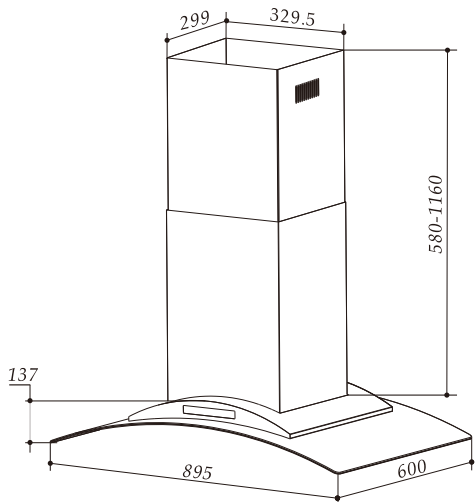

TI20



► Features

Size	90 cm
Material	Inox 430 SS body
Airflow	Housing K (1x230W motor)-750m ³ /h Housing M (1x130W motor)-550m ³ /h
Noise level	≤66 dB
Switch	3-Speed touch switch
Lighting	4x1.5W LED
Filter	3x5-Layer aluminum grease filter
Chimney cover	2x600 mm 430 S/S


With ϕ 150mm outlet dimension and 2m aluminum exhaust pipe

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
75 cm	745x327x589	930x445x660	96/260 pcs
90 cm	895x327x589	1035x445x660	81/220 pcs

► Optional

2xRound charcoal filter
3-Speed electronic switch
Baffler filter
110V or 220V available

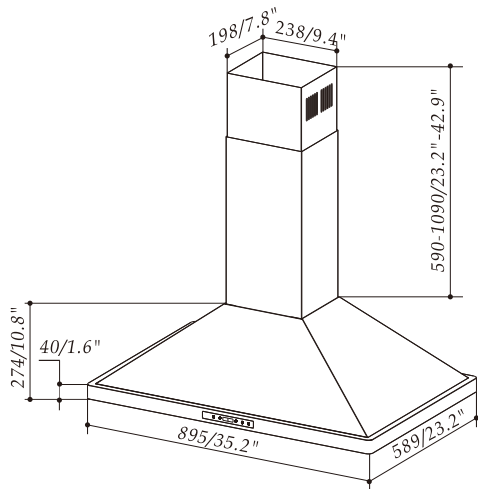



TS Series

THE LAMP DESIGN RANGE HOOD,
GIVES YOU THE BEST SOLUTION TO OPEN YOUR KITCHEN,
AND IMPRESS YOU A BRAND NEW FEELING OF RANGE HOOD
WHICH IS A DECORATION THAN AN APPLIANCE.



TS SPECIAL

RANGE HOOD SERIES

The special design range hood, gives you the best solution to open your kitchen, and impress you a brand new feeling of range hood which is a decoration than an appliance.



SPECIAL HOOD



TS01



► Features


Size	90 cm
Material	Inox 430 SS body
Airflow	Housing D (1x70W motor)-650 m ³ /h
Noise level	≤65 dB
Switch	3-Speed electronic switch
Lighting	4x1.5W LED
Filter	2x5-Layer aluminum grease filter
with Φ 150mm outlet dimension	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	895x420x345	940x475x410	120/300 pcs

► Optional

2xRound charcoal filter
110V or 220V available

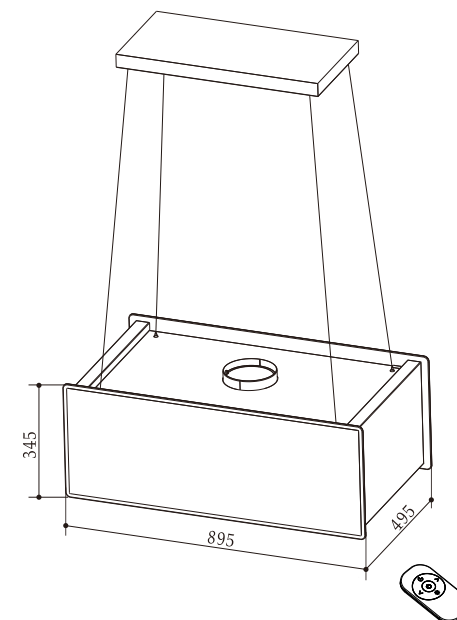

TS02



► Features


Size	48 cm
Material	Inox 430 SS body
Airflow	Housing D (1x70W motor)-650 m ³ /h
Noise level	≤65 dB
Switch	3-Speed touch switch
Lighting	1x3W Square Lamp
Filter	1x5-Layer aluminum grease filter
with Φ 150mm outlet dimension	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
48 cm	350x480x480	520x400x535	244/504 pcs

► Optional

2xRound charcoal filter
110V or 220V available

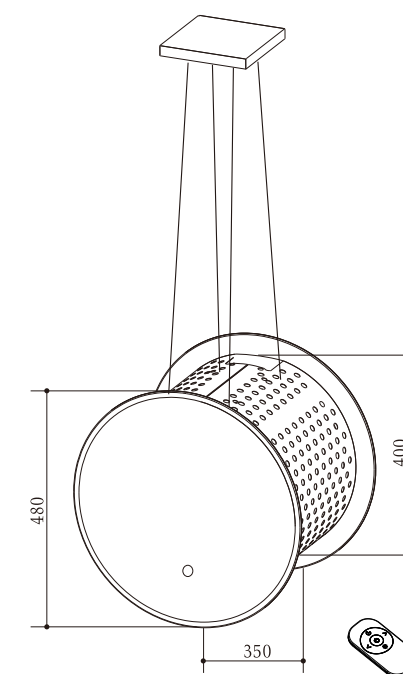

SPECIAL HOOD



TS03



► Features

Size	50 cm
Material	Inox 430 SS body
Airflow	Housing D (1x70W motor)-650 m ³ /h
Noise level	≤65 dB
Switch	3-Speed electronic switch
Lighting	3x1.5W LED
Filter	1x3-Layer aluminum grease filter


with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
50 cm	500x500x353	550x550x415	200/504 pcs

► Optional

2xRound charcoal filter
110V or 220V available

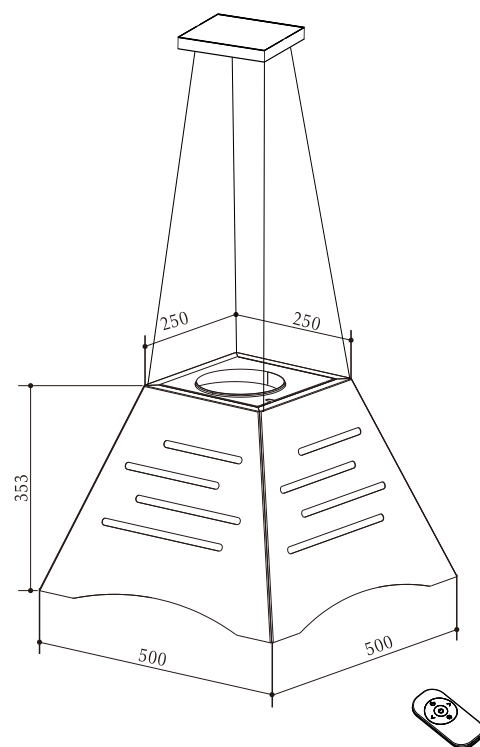

TS04



► Features

Size	60 cm
Material	Inox 430 SS body
Airflow	Housing D (1x70W motor)-650 m ³ /h
Noise level	≤65 dB
Switch	3-Speed electronic switch
Lighting	3x1.5W LED
Filter	1x5-Layer aluminum grease filter


with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
60 cm	590x590x405	640x640x465	96/270 pcs

► Optional

2xRound charcoal filter
110V or 220V available

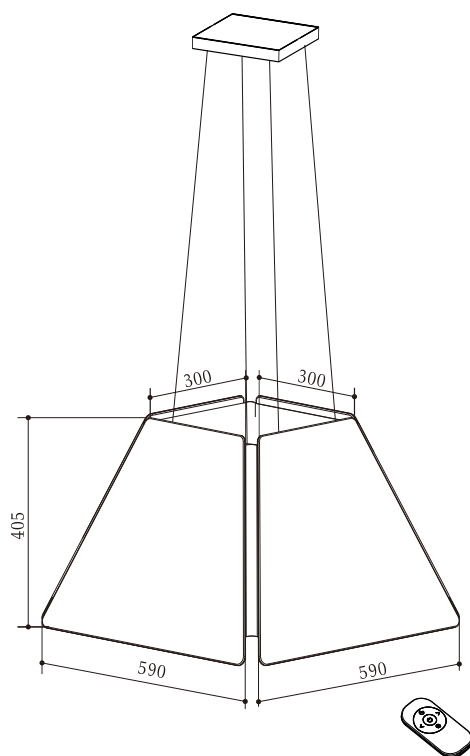

SPECIAL HOOD



TS05

► Features

Size	90 cm
Material	Inox 430 SS body
Airflow	Housing D (1x70W motor)-650 m ³ /h
Noise level	≤65 dB
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	2x5-Layer aluminum grease filter


with ϕ 150mm outlet dimension

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
90 cm	868x416x646	915x490x705	72/150 pcs

► Optional

2xRound charcoal filter
110V or 220V available

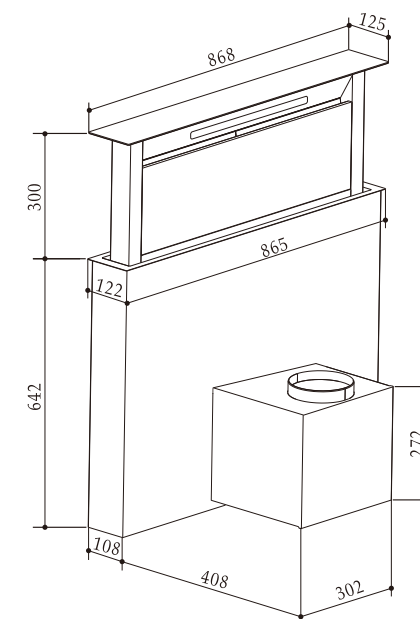

SPECIAL HOOD



TS06

SPECIAL HOOD



TS07

► Features


Size	110 cm
Material	Inox 430 SS body
Airflow	Housing E (1x200W motor)-650 m³/h Housing K (1x230W motor)-750 m³/h
Noise level	≤65 dB
Switch	3-Speed electronic switch
Lighting	4x2W LED
Filter	4x5-Layer aluminum grease filter
with φ150mm outlet dimension	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
110 cm	1100x700x300	1175x375x780	70/168 pcs

► Optional

2xRound charcoal filter
110V or 220V available

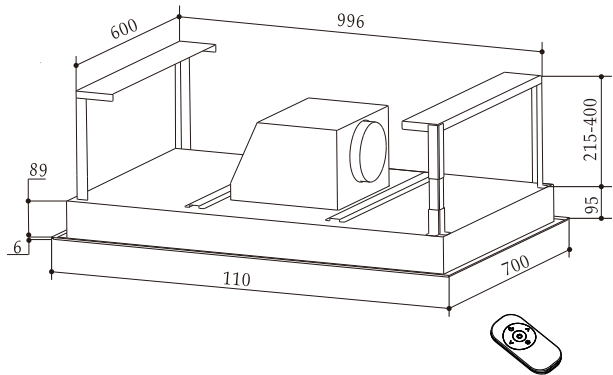

► Features


Size	35 cm
Material	Cold rolled plate
Airflow	Housing E (1x200W motor)-650 m³/h Housing K (1x230W motor)-750 m³/h
Noise level	≤65 dB
Switch	3-Speed electronic switch
Lighting	2x1.5W LED
Filter	1x5-Layer aluminum grease filter
with φ150mm outlet dimension	

► Packing

	Product size (LxWxH mm)	Packing size (LxWxH mm)	Loading capacity (20'GP/40'HQ)
35 cm	350x350x380	455x415x420	300/750 pcs

► Optional

2xRound charcoal filter
110V or 220V available

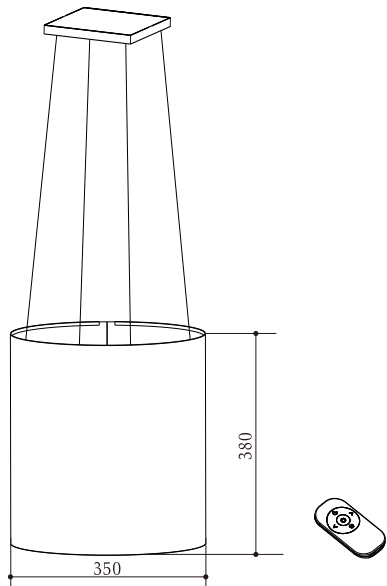

Accessories



Switch



MO1-Push button



MO2-Push button



MO3-Push button



MO4-Rocker switch



MO9-Rocker switch



EO2-Electronic switch




EO3-Rotary switch



EO4-Electronic switch




EO5-Electronic switch



EO6-Electronic switch



EO7-Electronic switch



EO9-Electronic switch



TO2-Touch switch



TO4-Touch switch




TO7-Touch switch




TO8-Touch switch



T10-Touch switch



T11-Touch switch



T12-Touch switch



T13-Touch switch



T14-Touch switch



T20-Touch switch



T21-Touch switch



T22-Touch switch



T23-Touch switch



T24-Touch switch




T33-Touch switch



T35-Touch switch



T37-Touch switch



T39-Touch switch



T41-Touch switch



T42-Touch switch

Light



LO9-LED light 1.5 watt



LO2-LED light 1.5 watt



LO7-LED light 1.5 watt



LO8-LED light 2 watt



LO10-LED light 2 watt




LO14-LED light 2 watt

Housing

 Housing S 350m³/h Housing Y(ETL) 206 CFM	 Housing P 400m³/h	 Housing M 550m³/h	 Housing L 550m³/h
 Housing K 750m³/h Housing G(ETL) 441 CFM	 Housing E 650m³/h AC A	 Housing D 650m³/h DC A+	 Housing N 900m³/h Housing T(ETL) 529 CFM
 Housing F 900m³/h	 Housing J 450m³/h DC A++	 Housing H 900m³/h	 Housing C 750m³/h
 Housing Q 1000m³/h Housing U(ETL) 588 CFM	 Housing W 1000m³/h Housing V(ETL) 588 CFM	 Housing I 800m³/h	 Housing R 1000m³/h
 Housing A3 200m³/h (ETL) 100 CFM	 Housing A4 500m³/h (ETL) 294 CFM	 Housing B3 320m³/h	 Housing B2 1000m³/h (ETL) 588 CFM

About remote



Special arch bridge angle design for a better using experience.
For all of our products which have touch switch have the option
of using the remote control.

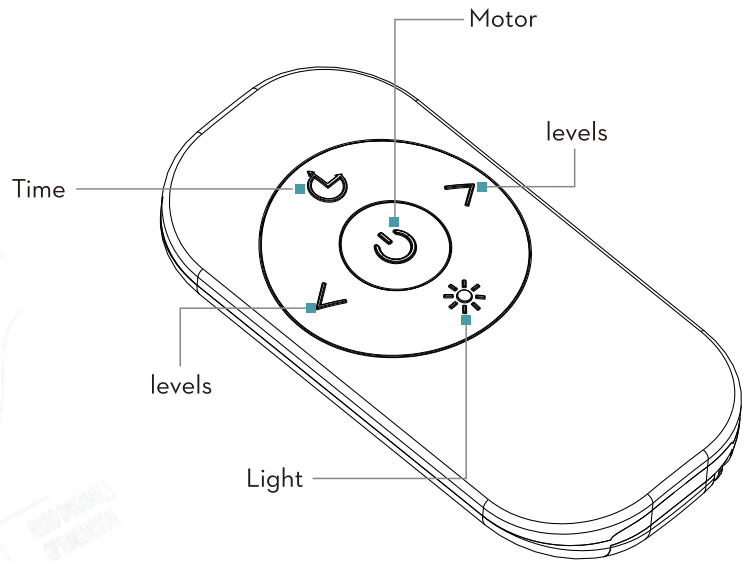

Fan

 For Housing C	 For Housing K	 For Housing M
 For Housing H	 For Housing R	 For Housing S

Other

 Charcoal sponge	 Round carbon filter for K	 Round carbon filter for S	 Square carbon filter
 Aluminum with SS locker	 Aluminum filter	 Baffle filter	 Metal filter
 Square wall cap	 Square wall cap	 SS wall cap	 Plastic wall cap
 Plastic air duct	 Aluminum pipe	 Plastic pipe	 Aluminum-pipe
 Plastic adaptor	 Stainless steel chimney	 Powder coating chimney	 Titanium steel chimney
 Round air outlet	 Square air outlet	 Metal outlet	 Wall bracket
 Oil cup	 Oil cup	 Oil cup	 Remote control

How to choose it

Choose a hood that facilitates your work in the kitchen, affords freedom of movement and simplifies food preparation.

The hood should also have the right suction power. Consider the size of your kitchen and your cooking habits this is the only way to obtain the right air flow and lower electricity consumption.

A simple calculation allows understanding the most suitable capacity for every kitchen.
Just multiply the volume of the room by 10 to obtain.

The ideal capacity. Choose your hood carefully and bring new air into your kitchen.
There is a wide range of installation options, find the model that best suits your room, lifestyle and way of being.

How to install it

The correct operation of your hood is only ensured if it is installed by specialized technicians.
Assembly and maintenance vary according to the two types of hood: duct-out and recirculating.
Many Tianmei models can operate in both versions.
When installing your hood, bear in mind these simple basic rules:


- Follow all the steps shown in the instruction manual of the product;
- Connect the duct-out hood to the outside with a dedicated pipe: minimized length and absence of bends ensure better performance.
- Comply with the minimum distance from the cooktop specified in the manual,
- in order to avoid damaging working parts and ensuring people's safety;
- Make sure that the outlet che is close to the product for connection.
- In the event of difficulties, seek assistance from a reliable specialized technician;

Taking care of it


To ensure the long life and correct operation of your Hood in both duct-out and recirculating versions, the first step is to keep the filtering system in good condition.

- There are two types of filters:
- The grease filter protects your hood by trapping particles of grease.
- The aluminum or stainless steel grease filter requires periodic cleaning by hand with neutral detergent or in the dishwasher at low temperature (*).
- The paper grease filter must be replaced every month depending on use.
- The active charcoal filter installed on recirculating hoods, traps odour particles of air.
- Remember to replace it every 3-4 months.
- Long life filters have a longer life: they must be replaced every two years.
- Simple precautions will help you keep your hood in perfect condition.


(*)Always follow the instructions for washing the filter on the manual of the product.

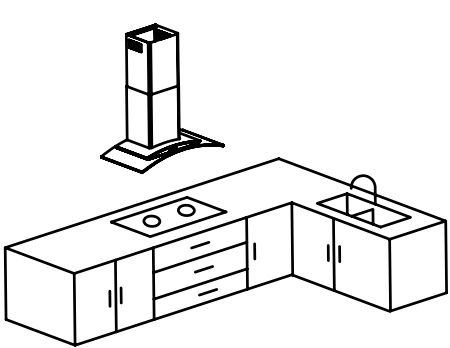


1 Wall-mounted
The kitchen unit is located against the wall with the cooktop adjacent to the wall. Hood to be mounted on the wall.

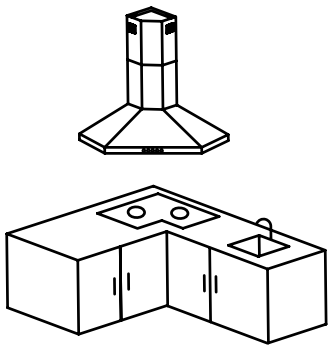


2 Corner
The kitchen unit extends along two walls of the room and the cooktop is located in the corner. Hood to be installed between the adjacent walls.

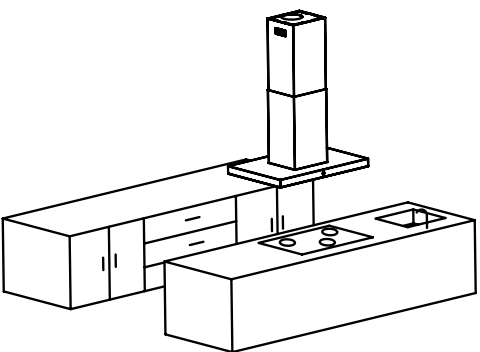


3 Island
The kitchen unit is located at the center of the room with the cooktop away from the wall. Hood to be mounted on the ceiling.

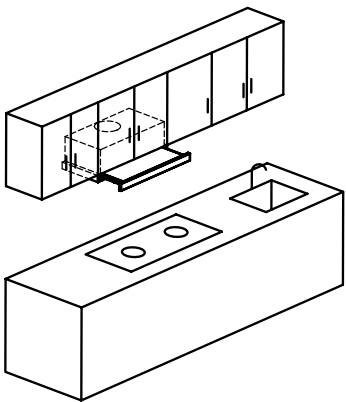

4 Built-in
The cooktop is located under a wall unit. Hood to be installed inside the wall unit.

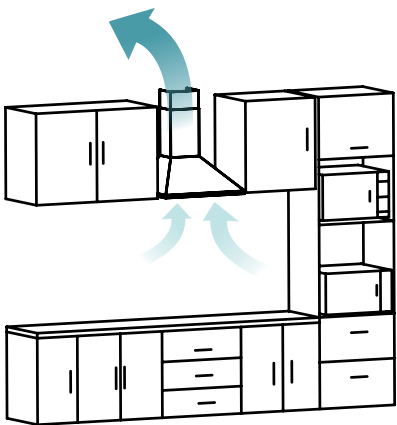

5 Duct-out hood
The duct-out hood exhausts air to the outside. This is the most used type, because it ensures high performance, high capacity and low noise level.

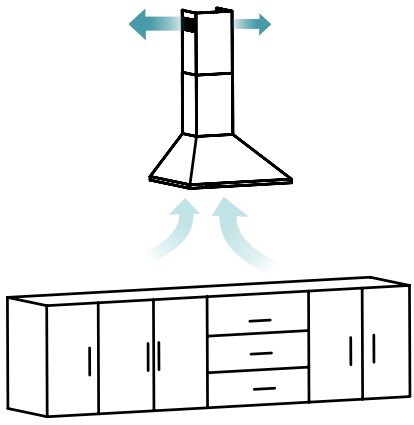

6 Recirculating hood
The recirculating hood removes bad odours by means of a dedicated charcoal filter and reintroduces air into the kitchen. This type is suitable for rooms with no extractor duct, affords air saving and avoids thermal losses to the outside.